


# Long Short Term Memory Networks

Fenfei Guo and Jordan Boyd-Graber University of Maryland

#### **Recap of LSTM**

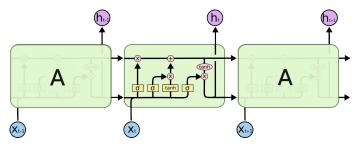

Three gates: input  $(i_t)$ , forget  $(f_t)$ , out  $(o_t)$ 

$$i_{t} = \sigma(W_{ii}x_{t} + b_{ii} + W_{hi}h_{t-1} + b_{hi})$$
  

$$f_{t} = \sigma(W_{if}x_{t} + b_{if} + W_{hf}h_{t-1} + b_{hf})$$
  

$$o_{t} = \sigma(W_{io}x_{t} + b_{io} + W_{ho}h_{t-1} + b_{ho})$$

New memory input:  $\tilde{c}_t$ 

$$\tilde{c}_t = \tanh(W_{ic}x_t + b_{ic} + W_{hc}h_{t-1} + b_{hc})$$

Memorize and forget:

$$c_t = f_t * c_{t-1} + i_t * \tilde{c}_t$$
$$h_t = o_t * \tanh(c_t)$$

#### Figuring out this LSTM



input sequence: A, A, B, B, A, B, A

$$x_1 = [1.0, 0.0]$$
  $x_2 = [1.0, 0.0]$   $x_3 = [0.0, 1.0]$  ...

prediction output:

$$y_t = \operatorname{softmax}(h_t)$$
 [number of hidden nodes = 2]

#### Parameters that take *x*<sub>t</sub> as input

Input Gate	Memory Cell
$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix}$ $b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$	$W_{ic} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix}$ $b_{ic} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$
Forget Gate	Output Gate
$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix}$ $b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$	$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix}$ $b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix}$

### Parameters that take $h_{t-1}$ as input

Input Gate	Memory Cell
$W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix}$ $b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$	$W_{hc} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix}$ $b_{hc} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$
Forget Gate	Output Gate
$W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix}$ $b_{hf} = \begin{bmatrix} -30.00 \\ 0.00 \end{bmatrix}$	$W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix}$ $b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$

#### Inputs

Initial hidden states:

$$h_0 = [0.0, 0.0]^{\top}$$

Initial memory input:

$$c_0 = [0.0, 0.0]^{\top}$$

Input sequences in time: A, A, B, B, A, B, A

$$x_1 = \begin{bmatrix} 1.0 \\ 0.0 \end{bmatrix}$$
  $x_2 = \begin{bmatrix} 1.0 \\ 0.0 \end{bmatrix}$   $x_3 = \begin{bmatrix} 0.0 \\ 1.0 \end{bmatrix}$  ...

#### Input Gate at t = 1: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

#### Input Gate at t = 1: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

$$i^{(1)} = \sigma(W_{ii}x^{(1)} + b_{ii} + W_{hi}h^{(0)} + b_{hi})$$
(1)

$$=\sigma([30.00, -30.00]^{\top})$$
 (2)

$$= [1.00, 0.00]^{ op}$$
 (3)

## Forget Gate at t = 1: $f^{(1)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} b_{hf} = \begin{bmatrix} -30.00 \\ 0.00 \end{bmatrix} x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

## Forget Gate at t = 1: $f^{(1)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

$$f^{(1)} = \sigma(W_{if}x^{(1)} + b_{if} + W_{hf}h^{(0)} + b_{hf})$$
(4)

$$=\sigma([30.00, 0.00]^{\top})$$
 (5)

$$= [1.00, 0.50]^{\top}$$
 (6)

## Output Gate at t = 1: $o^{(1)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$$
$$x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

## Output Gate at t = 1: $o^{(1)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

$$o^{(1)} = \sigma (W_{io} x^{(1)} + b_{io} + W_{ho} h^{(0)} + b_{ho})$$
(7)

$$=\sigma([30.00, 30.00]^{\top})$$
 (8)

$$= [1.00, 1.00]^{\top}$$
 (9)

Memory Contribution at t = 1:  $\tilde{c}^{(1)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$$
$$x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\mathsf{T}}$$

Memory Contribution at t = 1:  $\tilde{c}^{(1)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(1)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(0)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\mathsf{T}}$$

$$\tilde{c}^{(1)} = \tanh(W_{i\tilde{c}}x^{(1)} + b_{i\tilde{c}} + W_{h\tilde{c}}h^{(0)} + b_{h\tilde{c}})$$
(10)

 $= \tanh([30.00, 0.00]^{\top})$  (11)

$$= [1.00, 0.00]^{ op}$$
 (12)

$$f_1$$
 $C_0$ 
 $i_1$ 
 $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)

$$c_1 = f_1 \circ c_0 + i_1 \circ \tilde{c_1} \tag{13}$$

$$f_1$$
 $C_0$ 
 $i_1$ 
 $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)

$$c_1 = f_1 \circ c_0 + i_1 \circ \tilde{c_1} \tag{13}$$

$$= [1.00, 0.50]^{\top} \circ [0.00, 0.00]^{\top} + [1.00, 0.00]^{\top} \circ [1.00, 0.00]^{\top}$$
(14)

(15)

$$f_1$$
 $C_0$ 
 $i_1$ 
 $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)

$$c_1 = f_1 \circ c_0 + i_1 \circ \tilde{c_1} \tag{13}$$

$$= [1.00, 0.50]^{\top} \circ [0.00, 0.00]^{\top} + [1.00, 0.00]^{\top} \circ [1.00, 0.00]^{\top}$$
(14)  
$$= [1.00, 0.00]^{\top}$$
(15)

$$f_1$$
 $C_0$ 
 $i_1$ 
 $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)

$$c_1 = [1.00, 0.00]^\top \tag{13}$$

New hidden (h<sub>1</sub>)

 $f_1$   $C_0$   $i_1$   $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$   $[0.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)

$$c_1 = [1.00, 0.00]^{\top}$$
 (13)

New hidden (h<sub>1</sub>)

$$h_1 = o_1 \circ \tanh(c_1) \tag{14}$$

(15)

 $f_1$   $C_0$   $i_1$   $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$   $[0.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)

$$c_1 = [1.00, 0.00]^{\top}$$
 (13)

New hidden (*h*<sub>1</sub>)

$$h_1 = o_1 \circ \tanh(c_1) \tag{14}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([1.00, 0.00]^{\top})$$
 (15)

(16)

 $f_1$   $C_0$   $i_1$   $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$   $[0.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)

$$c_1 = [1.00, 0.00]^{\top}$$
 (13)

New hidden (h<sub>1</sub>)

$$h_1 = o_1 \circ \tanh(c_1) \tag{14}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([1.00, 0.00]^{\top})$$
 (15)

$$=$$
[0.76, 0.00] <sup>$\top$</sup>  (16)

$$f_1$$
 $C_0$ 
 $i_1$ 
 $\tilde{C}_1$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>1</sub>)


$$c_1 = [1.00, 0.00]^{\top}$$
 (13)

New hidden (h<sub>1</sub>)


$$h_1 = [0.76, 0.00]^{\top}$$
 (14)

• Prediction  $y_1 = \operatorname{softmax}(h_1) = 0$ 

#### Summary at t = 1

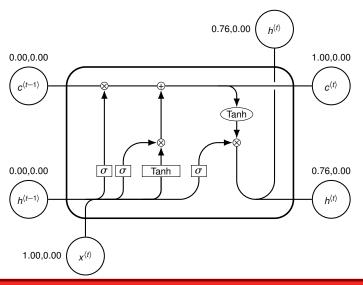

#### Summary at t = 1

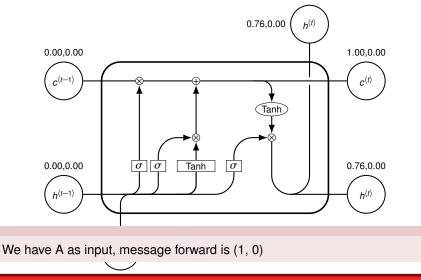

Input Gate at t = 2:  $i_1$ 

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix} \\ x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

Input Gate at t = 2:  $i_1$ 

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

$$i^{(2)} = \sigma(W_{ii}x^{(2)} + b_{ii} + W_{hi}h^{(1)} + b_{hi})$$
(15)

$$=\sigma([30.00, 15.70]^{\top})$$
 (16)

$$= [1.00, 1.00]^{\top}$$
 (17)

## Forget Gate at t = 2: $f^{(2)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

## Forget Gate at t = 2: $f^{(2)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

$$f^{(2)} = \sigma(W_{if}x^{(2)} + b_{if} + W_{hf}h^{(1)} + b_{hf})$$
(18)

$$=\sigma([30.00, 0.00]^{\top})$$
 (19)

$$= [1.00, 0.50]^{\top}$$
 (20)

## Output Gate at t = 2: $o^{(2)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$$
$$x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\mathsf{T}}$$

## Output Gate at t = 2: $o^{(2)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

$$o^{(2)} = \sigma (W_{io} x^{(2)} + b_{io} + W_{ho} h^{(1)} + b_{ho})$$
(21)

$$=\sigma([30.00, 30.00]^{\top})$$
 (22)

$$= [1.00, 1.00]^{\top}$$
 (23)

Memory Contribution at t = 2:  $\tilde{c}^{(2)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\mathsf{T}}$$

Memory Contribution at t = 2:  $\tilde{c}^{(2)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(2)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(1)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

$$\tilde{c}^{(2)} = \tanh(W_{i\tilde{c}}x^{(2)} + b_{i\tilde{c}} + W_{h\tilde{c}}h^{(1)} + b_{h\tilde{c}})$$
(24)

- $= \tanh([30.00, 0.00]^{\top})$  (25)
- $= [1.00, 0.00]^{\top}$  (26)

$$f_2$$
 $C_1$ 
 $i_2$ 
 $\tilde{C}_2$ 
 $[1.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)

$$c_2 = f_2 \circ c_1 + i_2 \circ \tilde{c}_2 \tag{27}$$

$$f_2$$
 $C_1$ 
 $i_2$ 
 $\tilde{C}_2$ 
 $[1.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)

$$c_{2} = f_{2} \circ c_{1} + i_{2} \circ \tilde{c}_{2}$$

$$= [1.00, 0.50]^{\top} \circ [1.00, 0.00]^{\top} + [1.00, 1.00]^{\top} \circ [1.00, 0.00]^{\top}$$
(28)
(29)

$$f_2$$
 $c_1$ 
 $i_2$ 
 $\tilde{c}_2$ 
 $[1.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)

$$f_2$$
 $C_1$ 
 $i_2$ 
 $\tilde{C}_2$ 
 $[1.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)

$$c_2 = [2.00, 0.00]^{\top}$$
 (27)

New hidden (h<sub>2</sub>)

 $h_2$ 

(28)

$$f_2$$
 $C_1$ 
 $i_2$ 
 $\tilde{C}_2$ 
 $[1.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)

$$c_2 = [2.00, 0.00]^{\top}$$
 (27)

New hidden (h<sub>2</sub>)

$$h_2 = o_2 \circ \tanh(c_2) \tag{28}$$

(29)

 $f_2$   $C_1$   $i_2$   $\tilde{C}_2$ 
 $[1.00, 0.50]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 1.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)

$$c_2 = [2.00, 0.00]^{\top}$$
 (27)

New hidden (h<sub>2</sub>)

$$h_2 = o_2 \circ \tanh(c_2) \tag{28}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([2.00, 0.00]^{\top})$$
 (29)

(30)

 $f_2$   $C_1$   $i_2$   $\tilde{C}_2$ 
 $[1.00, 0.50]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 1.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)

$$c_2 = [2.00, 0.00]^{\top}$$
 (27)

New hidden (h<sub>2</sub>)

$$h_2 = o_2 \circ \tanh(c_2) \tag{28}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([2.00, 0.00]^{\top})$$
 (29)

$$= [0.96, 0.00]^{\top}$$
 (30)

$$f_2$$
 $C_1$ 
 $i_2$ 
 $\tilde{C}_2$ 
 $[1.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>2</sub>)


$$c_2 = [2.00, 0.00]^{\top}$$
 (27)

New hidden (h<sub>2</sub>)


$$h_2 = [0.96, 0.00]^{\top}$$
 (28)

• Prediction  $y_2 = \operatorname{softmax}(h_2) = 0$ 

#### Summary at t = 2

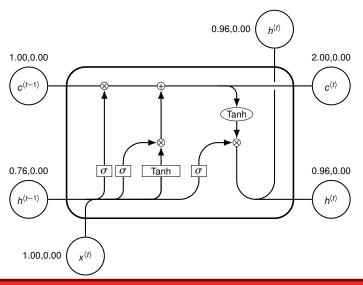

#### Summary at t = 2

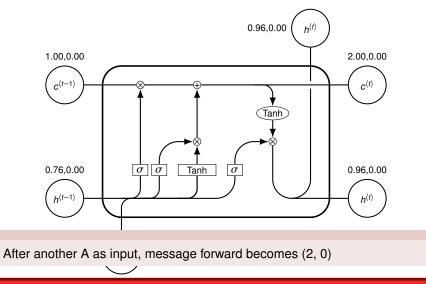

#### Input Gate at t = 3: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix} \\ x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\top}$$

Input Gate at t = 3:  $i_1$ 

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\top}$$

$$i^{(3)} = \sigma(W_{ii}x^{(3)} + b_{ii} + W_{hi}h^{(2)} + b_{hi})$$
<sup>(29)</sup>

$$=\sigma([0.00, 27.84]^{\top})$$
 (30)

$$= [0.50, 1.00]^{\top}$$
 (31)

## Forget Gate at t = 3: $f^{(3)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\top}$$

## Forget Gate at t = 3: $f^{(3)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \quad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\mathsf{T}}$$

$$f^{(3)} = \sigma(W_{if}x^{(3)} + b_{if} + W_{hf}h^{(2)} + b_{hf})$$
(32)

$$=\sigma([-30.00, 0.00]^{\top})$$
 (33)

$$= [0.00, 0.50]^{\top}$$
 (34)

## Output Gate at t = 3: $o^{(3)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \qquad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\top}$$

# Output Gate at t = 3: $o^{(3)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\top}$$

$$o^{(3)} = \sigma(W_{io}x^{(3)} + b_{io} + W_{ho}h^{(2)} + b_{ho})$$
(35)

$$=\sigma([30.00, 30.00]^{\top})$$
 (36)

$$= [1.00, 1.00]^{\top}$$
 (37)

Memory Contribution at t = 3:  $\tilde{c}^{(3)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\mathsf{T}}$$

Memory Contribution at t = 3:  $\tilde{c}^{(3)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(3)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(2)} = \begin{bmatrix} 0.96, 0.00 \end{bmatrix}^{\mathsf{T}}$$

$$\tilde{c}^{(3)} = \tanh(W_{i\tilde{c}}x^{(3)} + b_{i\tilde{c}} + W_{h\tilde{c}}h^{(2)} + b_{h\tilde{c}})$$
(38)

 $= \tanh([0.00, 30.00]^{\top})$  (39)

$$= [0.00, 1.00]^{\top}$$
 (40)

<i>f</i> <sub>3</sub>	<i>C</i> <sub>2</sub>	<i>i</i> <sub>3</sub>	$ ilde{c_3}$
$[0.00, 0.50]^{ op}$	[2.00, 0.00] <sup>⊤</sup>	[0.50, 1.00] <sup>⊤</sup>	[0.00, 1.00] <sup>⊤</sup>

Message forward (c<sub>3</sub>)

$$c_3 = f_3 \circ c_2 + i_3 \circ \tilde{c}_3 \tag{41}$$

$$f_3$$
 $C_2$ 
 $i_3$ 
 $\tilde{C}_3$ 
 $[0.00, 0.50]^{\top}$ 
 $[2.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>3</sub>)

$$c_3 = f_3 \circ c_2 + i_3 \circ \tilde{c_3} \tag{41}$$

$$= [0.00, 0.50]^{\top} \circ [2.00, 0.00]^{\top} + [0.50, 1.00]^{\top} \circ [0.00, 1.00]^{\top}$$
(42)  
(43)

$$f_3$$
 $C_2$ 
 $i_3$ 
 $\tilde{C}_3$ 
 $[0.00, 0.50]^{\top}$ 
 $[2.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>3</sub>)

$$c_{3} = f_{3} \circ c_{2} + i_{3} \circ \tilde{c}_{3}$$

$$= [0.00, 0.50]^{\top} \circ [2.00, 0.00]^{\top} + [0.50, 1.00]^{\top} \circ [0.00, 1.00]^{\top}$$

$$= [0.00, 1.00]^{\top}$$

$$(42)$$

$$f_3$$
 $C_2$ 
 $i_3$ 
 $\tilde{C}_3$ 
 $[0.00, 0.50]^{\top}$ 
 $[2.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>3</sub>)

$$c_3 = [0.00, 1.00]^{\top}$$
 (41)

New hidden (h<sub>3</sub>)

### h<sub>3</sub>

(42)

 $f_3$   $C_2$   $i_3$   $\tilde{C}_3$ 
 $[0.00, 0.50]^{\top}$   $[2.00, 0.00]^{\top}$   $[0.50, 1.00]^{\top}$   $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>3</sub>)

$$c_3 = [0.00, 1.00]^{\top}$$
 (41)

New hidden (h<sub>3</sub>)

$$h_3 = o_3 \circ \tanh(c_3) \tag{42}$$

(43)

 $f_3$   $C_2$   $i_3$   $\tilde{C}_3$ 
 $[0.00, 0.50]^{\top}$   $[2.00, 0.00]^{\top}$   $[0.50, 1.00]^{\top}$   $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>3</sub>)

$$c_3 = [0.00, 1.00]^{\top}$$
 (41)

New hidden (h<sub>3</sub>)

$$h_3 = o_3 \circ \tanh(c_3) \tag{42}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([0.00, 1.00]^{\top})$$
 (43)

(44)

 $f_3$   $C_2$   $i_3$   $\tilde{C}_3$ 
 $[0.00, 0.50]^{\top}$   $[2.00, 0.00]^{\top}$   $[0.50, 1.00]^{\top}$   $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>3</sub>)

$$c_3 = [0.00, 1.00]^{\top}$$
 (41)

New hidden (h<sub>3</sub>)

$$h_3 = o_3 \circ \tanh(c_3) \tag{42}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([0.00, 1.00]^{\top})$$
 (43)

$$= [0.00, 0.76]^{\top}$$
 (44)

$$f_3$$
 $C_2$ 
 $i_3$ 
 $\tilde{C}_3$ 
 $[0.00, 0.50]^{\top}$ 
 $[2.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>3</sub>)


$$c_3 = [0.00, 1.00]^{\top}$$
 (41)

New hidden (h<sub>3</sub>)


$$h_3 = [0.00, 0.76]^{\top}$$
 (42)

• Prediction  $y_3 = \operatorname{softmax}(h_3) = 1$ 

#### Summary at t = 3

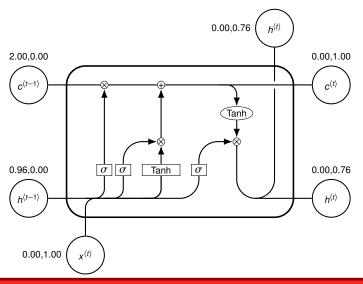

#### Summary at t = 3

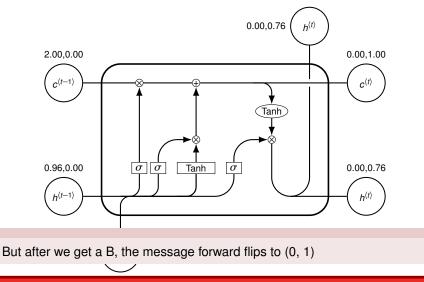

Input Gate at t = 4:  $i_1$ 

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix} \\ x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

Input Gate at t = 4:  $i_1$ 

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\mathsf{T}}$$

$$i^{(4)} = \sigma(W_{ii}x^{(4)} + b_{ii} + W_{hi}h^{(3)} + b_{hi})$$
(43)

$$=\sigma([0.00, -30.00]^{\top})$$
 (44)

$$= [0.50, 0.00]^{\top}$$
 (45)

## Forget Gate at t = 4: $f^{(4)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

## Forget Gate at t = 4: $f^{(4)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

$$f^{(4)} = \sigma(W_{if}x^{(4)} + b_{if} + W_{hf}h^{(3)} + b_{hf})$$
(46)

$$=\sigma([-30.00, -22.85]^{\top})$$
 (47)

$$= [0.00, 0.00]^{\top}$$
 (48)

# Output Gate at t = 4: $o^{(4)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \qquad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

# Output Gate at t = 4: $o^{(4)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \qquad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

$$o^{(4)} = \sigma(W_{io}x^{(4)} + b_{io} + W_{ho}h^{(3)} + b_{ho})$$
(49)

$$=\sigma([30.00, 30.00]^{\top})$$
 (50)

$$= [1.00, 1.00]^{\top}$$
 (51)

Memory Contribution at t = 4:  $\tilde{c}^{(4)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \qquad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

Memory Contribution at t = 4:  $\tilde{c}^{(4)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(4)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(3)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\mathsf{T}}$$

$$\tilde{c}^{(4)} = \tanh(W_{i\tilde{c}}x^{(4)} + b_{i\tilde{c}} + W_{h\tilde{c}}h^{(3)} + b_{h\tilde{c}})$$
(52)

 $= \tanh([0.00, 30.00]^{\top})$  (53)

$$= [0.00, 1.00]^{ op}$$
 (54)

$$f_4$$
 $C_3$ 
 $i_4$ 
 $\tilde{C}_4$ 
 $[0.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[0.50, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>4</sub>)

$$c_4 = f_4 \circ c_3 + i_4 \circ \tilde{c}_4 \tag{55}$$

$$f_4$$
 $C_3$ 
 $i_4$ 
 $\tilde{C}_4$ 
 $[0.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[0.50, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>4</sub>)

$$c_{4} = f_{4} \circ c_{3} + i_{4} \circ \tilde{c}_{4}$$

$$= [0.00, 0.00]^{\top} \circ [0.00, 1.00]^{\top} + [0.50, 0.00]^{\top} \circ [0.00, 1.00]^{\top}$$
(56)
(57)

$$f_4$$
 $C_3$ 
 $i_4$ 
 $\tilde{C}_4$ 
 $[0.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[0.50, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>4</sub>)

$$c_{4} = f_{4} \circ c_{3} + i_{4} \circ \tilde{c}_{4}$$

$$= [0.00, 0.00]^{\top} \circ [0.00, 1.00]^{\top} + [0.50, 0.00]^{\top} \circ [0.00, 1.00]^{\top}$$

$$= [0.00, 0.00]^{\top}$$
(57)

$$f_4$$
 $C_3$ 
 $i_4$ 
 $\tilde{C}_4$ 
 $[0.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[0.50, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

h₄

Message forward (c<sub>4</sub>)

$$c_4 = [0.00, 0.00]^\top \tag{55}$$

New hidden (h<sub>4</sub>)

(56)

$$f_4$$
 $C_3$ 
 $i_4$ 
 $\tilde{C}_4$ 
 $[0.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[0.50, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>4</sub>)

$$c_4 = [0.00, 0.00]^{\top} \tag{55}$$

New hidden (h<sub>4</sub>)

$$h_4 = o_4 \circ \tanh(c_4) \tag{56}$$

(57)

 $f_4$   $C_3$   $i_4$   $\tilde{C}_4$ 
 $[0.00, 0.00]^{\top}$   $[0.00, 1.00]^{\top}$   $[0.50, 0.00]^{\top}$   $[0.00, 1.00]^{\top}$ 

Message forward (*c*<sub>4</sub>)

$$c_4 = [0.00, 0.00]^\top \tag{55}$$

New hidden (h<sub>4</sub>)

$$h_4 = o_4 \circ \tanh(c_4) \tag{56}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([0.00, 0.00]^{\top})$$
 (57)

(58)

 $f_4$   $C_3$   $i_4$   $\tilde{C}_4$ 
 $[0.00, 0.00]^\top$   $[0.00, 1.00]^\top$   $[0.50, 0.00]^\top$   $[0.00, 1.00]^\top$ 

Message forward (*c*<sub>4</sub>)

$$c_4 = [0.00, 0.00]^\top \tag{55}$$

New hidden (h<sub>4</sub>)

$$h_4 = o_4 \circ \tanh(c_4) \tag{56}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([0.00, 0.00]^{\top})$$
 (57)

$$=[0.00, 0.00]^{\top}$$
 (58)

$$f_4$$
 $C_3$ 
 $i_4$ 
 $\tilde{C}_4$ 
 $[0.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[0.50, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>4</sub>)


$$c_4 = [0.00, 0.00]^\top \tag{55}$$

New hidden (h<sub>4</sub>)


$$h_4 = [0.00, 0.00]^\top \tag{56}$$

• Prediction  $y_4 = \operatorname{softmax}(h_4) = 1$ 

## Summary at t = 4

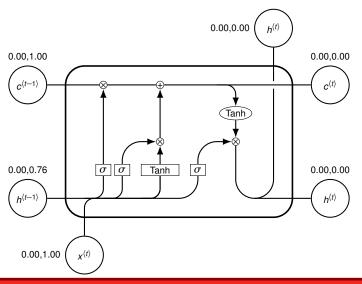

#### Summary at t = 4

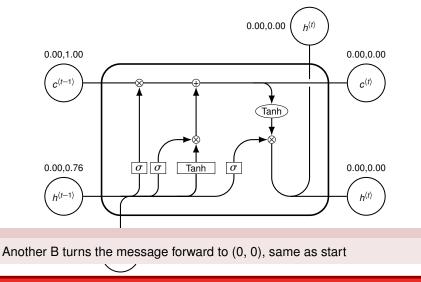

## Input Gate at t = 5: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix} \\ x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

## Input Gate at t = 5: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

$$i^{(5)} = \sigma(W_{ii}x^{(5)} + b_{ii} + W_{hi}h^{(4)} + b_{hi})$$
(57)

$$=\sigma([30.00, -30.00]^{\top})$$
 (58)

$$= [1.00, 0.00]^{\top}$$
 (59)

# Forget Gate at t = 5: $f^{(5)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} b_{hf} = \begin{bmatrix} -30.00 \\ 0.00 \end{bmatrix} x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

# Forget Gate at t = 5: $f^{(5)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \\ 0.00 \end{bmatrix}^{\top}$$

$$f^{(5)} = \sigma(W_{if}x^{(5)} + b_{if} + W_{hf}h^{(4)} + b_{hf})$$
(60)

$$=\sigma([30.00,-0.00]^{\top})$$
 (61)

$$= [1.00, 0.50]^{\top}$$
 (62)

# Output Gate at t = 5: $o^{(5)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$$
$$x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

# Output Gate at t = 5: $o^{(5)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix}$$
$$x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\top}$$

$$o^{(5)} = \sigma (W_{io} x^{(5)} + b_{io} + W_{ho} h^{(4)} + b_{ho})$$
(63)

$$=\sigma([30.00, 30.00]^{\top})$$
 (64)

$$= [1.00, 1.00]^{\top}$$
 (65)

Memory Contribution at t = 5:  $\tilde{c}^{(5)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\mathsf{T}}$$

Memory Contribution at t = 5:  $\tilde{c}^{(5)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(5)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(4)} = \begin{bmatrix} 0.00, 0.00 \end{bmatrix}^{\mathsf{T}}$$

$$\tilde{c}^{(5)} = \tanh(W_{i\tilde{c}}x^{(5)} + b_{i\tilde{c}} + W_{h\tilde{c}}h^{(4)} + b_{h\tilde{c}})$$
(66)

 $= \tanh([30.00, 0.00]^{\top})$  (67)

$$= [1.00, 0.00]^{ op}$$
 (68)

<i>f</i> <sub>5</sub>	<i>C</i> <sub>4</sub>	<i>i</i> 5	$\widetilde{c}_5$
[1.00,0.50] <sup>⊤</sup>	[0.00, 0.00] <sup>⊤</sup>	[1.00,0.00] <sup>⊤</sup>	[1.00,0.00] <sup>⊤</sup>

Message forward (c<sub>5</sub>)

$$c_5 = f_5 \circ c_4 + i_5 \circ \tilde{c}_5 \tag{69}$$

$$f_5$$
 $C_4$ 
 $i_5$ 
 $\tilde{C}_5$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>5</sub>)

$$c_{5} = f_{5} \circ c_{4} + i_{5} \circ \tilde{c}_{5}$$

$$= [1.00, 0.50]^{\top} \circ [0.00, 0.00]^{\top} + [1.00, 0.00]^{\top} \circ [1.00, 0.00]^{\top}$$
(70)
(71)

$$f_5$$
 $C_4$ 
 $i_5$ 
 $\tilde{C}_5$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>5</sub>)

$$c_{5} = f_{5} \circ c_{4} + i_{5} \circ \tilde{c}_{5}$$

$$= [1.00, 0.50]^{\top} \circ [0.00, 0.00]^{\top} + [1.00, 0.00]^{\top} \circ [1.00, 0.00]^{\top}$$

$$= [1.00, 0.00]^{\top}$$
(71)

$$f_5$$
 $C_4$ 
 $i_5$ 
 $\tilde{C}_5$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>5</sub>)

$$c_5 = [1.00, 0.00]^{\top}$$
 (69)

New hidden (h<sub>5</sub>)

# h<sub>5</sub>

(70)

 $f_5$   $C_4$   $i_5$   $\tilde{C}_5$ 
 $[1.00, 0.50]^{\top}$   $[0.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>5</sub>)

$$c_5 = [1.00, 0.00]^{\top}$$
 (69)

New hidden (h<sub>5</sub>)

$$h_5 = o_5 \circ \tanh(c_5) \tag{70}$$

(71)

 $f_5$   $C_4$   $i_5$   $\tilde{C}_5$ 
 $[1.00, 0.50]^{\top}$   $[0.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>5</sub>)

$$c_5 = [1.00, 0.00]^{\top}$$
 (69)

New hidden (h<sub>5</sub>)

$$h_5 = o_5 \circ \tanh(c_5) \tag{70}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([1.00, 0.00]^{\top})$$
 (71)

(72)

 $f_5$   $C_4$   $i_5$   $\tilde{C}_5$ 
 $[1.00, 0.50]^{\top}$   $[0.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>5</sub>)

$$c_5 = [1.00, 0.00]^{\top}$$
 (69)

New hidden (h<sub>5</sub>)

$$h_5 = o_5 \circ \tanh(c_5) \tag{70}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([1.00, 0.00]^{\top})$$
 (71)

$$= [0.76, 0.00]^{\top}$$
 (72)

$$f_5$$
 $C_4$ 
 $i_5$ 
 $\tilde{C}_5$ 
 $[1.00, 0.50]^{\top}$ 
 $[0.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>5</sub>)


$$c_5 = [1.00, 0.00]^{\top}$$
 (69)

New hidden (h<sub>5</sub>)


$$h_5 = [0.76, 0.00]^{\top}$$
 (70)

• Prediction  $y_5 = \operatorname{softmax}(h_5) = 0$ 

## Summary at t = 5

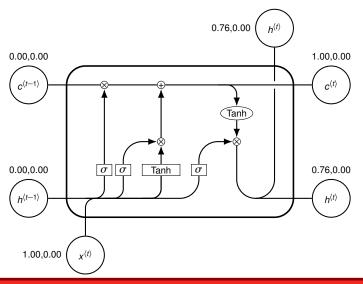

#### Summary at t = 5

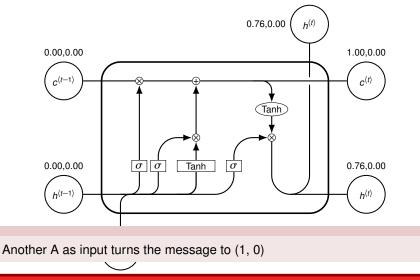

## Input Gate at t = 6: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix} \\ x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

## Input Gate at t = 6: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\mathsf{T}}$$

$$i^{(6)} = \sigma(W_{ii}x^{(6)} + b_{ii} + W_{hi}h^{(5)} + b_{hi})$$
(71)

$$=\sigma([0.00, 15.70]^{\top})$$
 (72)

$$= [0.50, 1.00]^{\top}$$
 (73)

# Forget Gate at t = 6: $f^{(6)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

# Forget Gate at t = 6: $f^{(6)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \quad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

$$f^{(6)} = \sigma(W_{if}x^{(6)} + b_{if} + W_{hf}h^{(5)} + b_{hf})$$
(74)

$$=\sigma([-30.00,-0.00]^{\top})$$
 (75)

$$= [0.00, 0.50]^{\top}$$
 (76)

# Output Gate at t = 6: $o^{(6)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \qquad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

# Output Gate at t = 6: $o^{(6)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\top} \qquad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\top}$$

$$o^{(6)} = \sigma(W_{io}x^{(6)} + b_{io} + W_{ho}h^{(5)} + b_{ho})$$
(77)

$$=\sigma([30.00, 30.00]^{\top})$$
 (78)

$$= [1.00, 1.00]^{\top}$$
 (79)

Memory Contribution at t = 6:  $\tilde{c}^{(6)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\mathsf{T}}$$

Memory Contribution at t = 6:  $\tilde{c}^{(6)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(6)} = \begin{bmatrix} 0.00, 1.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(5)} = \begin{bmatrix} 0.76, 0.00 \end{bmatrix}^{\mathsf{T}}$$

$$\tilde{c}^{(6)} = \tanh(W_{i\tilde{c}}x^{(6)} + b_{i\tilde{c}} + W_{h\tilde{c}}h^{(5)} + b_{h\tilde{c}})$$
(80)

 $= \tanh([0.00, 30.00]^{\top})$  (81)

$$= [0.00, 1.00]^{\top}$$
 (82)

<i>f</i> <sub>6</sub>	<i>C</i> <sub>5</sub>	<i>i</i> <sub>6</sub>	$\widetilde{c}_6$
$[0.00, 0.50]^{ op}$	[1.00,0.00] <sup>⊤</sup>	[0.50, 1.00] <sup>⊤</sup>	[0.00, 1.00] <sup>⊤</sup>

Message forward (c<sub>6</sub>)

$$c_6 = f_6 \circ c_5 + i_6 \circ \tilde{c_6} \tag{83}$$
(84)

$$f_6$$
 $C_5$ 
 $i_6$ 
 $\tilde{C}_6$ 
 $[0.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>6</sub>)

$$c_{6} = f_{6} \circ c_{5} + i_{6} \circ \tilde{c}_{6}$$

$$= [0.00, 0.50]^{\top} \circ [1.00, 0.00]^{\top} + [0.50, 1.00]^{\top} \circ [0.00, 1.00]^{\top}$$
(84)
(85)

$$f_6$$
 $C_5$ 
 $i_6$ 
 $\tilde{C}_6$ 
 $[0.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>6</sub>)

$$c_{6} = f_{6} \circ c_{5} + i_{6} \circ \tilde{c_{6}}$$

$$= [0.00, 0.50]^{\top} \circ [1.00, 0.00]^{\top} + [0.50, 1.00]^{\top} \circ [0.00, 1.00]^{\top}$$

$$= [0.00, 1.00]^{\top}$$
(83)
(83)
(83)
(83)
(83)
(83)
(83)
(84)
(84)
(84)
(85)
(85)

$$f_6$$
 $C_5$ 
 $i_6$ 
 $\tilde{C}_6$ 
 $[0.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

 $h_6$ 

Message forward (c<sub>6</sub>)

$$c_6 = [0.00, 1.00]^{\top}$$
 (83)

New hidden (h<sub>6</sub>)

(84)

$$f_6$$
 $C_5$ 
 $i_6$ 
 $\tilde{C}_6$ 
 $[0.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>6</sub>)

$$c_6 = [0.00, 1.00]^{\top}$$
 (83)

New hidden (h<sub>6</sub>)

$$h_6 = o_6 \circ \tanh(c_6) \tag{84}$$

(85)

 $f_6$   $C_5$   $i_6$   $\tilde{C}_6$ 
 $[0.00, 0.50]^{\top}$   $[1.00, 0.00]^{\top}$   $[0.50, 1.00]^{\top}$   $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>6</sub>)

$$c_6 = [0.00, 1.00]^{\top}$$
 (83)

New hidden (h<sub>6</sub>)

$$h_6 = o_6 \circ \tanh(c_6) \tag{84}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([0.00, 1.00]^{\top})$$
 (85)

(86)

 $f_6$   $C_5$   $i_6$   $\tilde{C}_6$ 
 $[0.00, 0.50]^{\top}$   $[1.00, 0.00]^{\top}$   $[0.50, 1.00]^{\top}$   $[0.00, 1.00]^{\top}$ 

Message forward (*c*<sub>6</sub>)

$$c_6 = [0.00, 1.00]^{\top}$$
 (83)

New hidden (h<sub>6</sub>)

$$h_6 = o_6 \circ \tanh(c_6) \tag{84}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([0.00, 1.00]^{\top})$$
 (85)

$$=$$
[0.00, 0.76] <sup>$\top$</sup>  (86)

$$f_6$$
 $C_5$ 
 $i_6$ 
 $\tilde{C}_6$ 
 $[0.00, 0.50]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.50, 1.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 

Message forward (c<sub>6</sub>)


$$c_6 = [0.00, 1.00]^{\top}$$
 (83)

New hidden (h<sub>6</sub>)


$$h_6 = [0.00, 0.76]^{\top}$$
 (84)

• Prediction  $y_6 = \operatorname{softmax}(h_6) = 1$ 

## Summary at t = 6

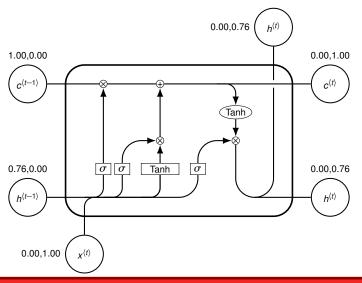

#### Summary at t = 6

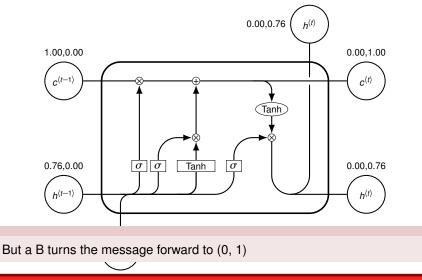

## Input Gate at t = 7: $i_1$

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix} \\ x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

Input Gate at t = 7:  $i_1$ 

$$W_{ii} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ii} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hi} = \begin{bmatrix} 0.00 & 0.00 \\ 60.00 & 0.00 \end{bmatrix} \quad b_{hi} = \begin{bmatrix} 0.00 \\ -30.00 \end{bmatrix}$$
$$x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

$$i^{(7)} = \sigma(W_{ii}x^{(7)} + b_{ii} + W_{hi}h^{(6)} + b_{hi})$$
(85)

$$=\sigma([30.00, -30.00]^{\top})$$
 (86)

$$= [1.00, 0.00]^{ op}$$
 (87)

## Forget Gate at t = 7: $f^{(7)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \quad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

# Forget Gate at t = 7: $f^{(7)}$

$$W_{if} = \begin{bmatrix} 60.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{if} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \quad W_{hf} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & -30.00 \end{bmatrix} \\ x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \quad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\mathsf{T}}$$

$$f^{(7)} = \sigma(W_{if}x^{(7)} + b_{if} + W_{hf}h^{(6)} + b_{hf})$$
(88)

$$=\sigma([30.00, -22.85]^{\top})$$
 (89)

$$= [1.00, 0.00]^{\top}$$
 (90)

# Output Gate at t = 7: $o^{(7)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

# Output Gate at t = 7: $o^{(7)}$

$$W_{io} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{io} = \begin{bmatrix} 30.00 \\ 30.00 \end{bmatrix} \quad W_{ho} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{ho} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\top} \qquad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\top}$$

$$o^{(7)} = \sigma (W_{io} x^{(7)} + b_{io} + W_{ho} h^{(6)} + b_{ho})$$
(91)

$$=\sigma([30.00, 30.00]^{\top})$$
 (92)

$$= [1.00, 1.00]^{\top}$$
 (93)

Memory Contribution at t = 7:  $\tilde{c}^{(7)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\mathsf{T}}$$

Memory Contribution at t = 7:  $\tilde{c}^{(7)}$ 

$$W_{i\tilde{c}} = \begin{bmatrix} 30.00 & 0.00 \\ 0.00 & 30.00 \end{bmatrix} \quad b_{i\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \qquad W_{h\tilde{c}} = \begin{bmatrix} 0.00 & 0.00 \\ 0.00 & 0.00 \end{bmatrix} \quad b_{h\tilde{c}} = \begin{bmatrix} 0.00 \\ 0.00 \end{bmatrix} \\ x^{(7)} = \begin{bmatrix} 1.00, 0.00 \end{bmatrix}^{\mathsf{T}} \qquad h^{(6)} = \begin{bmatrix} 0.00, 0.76 \end{bmatrix}^{\mathsf{T}}$$

$$\tilde{c}^{(7)} = \tanh(W_{i\tilde{c}}x^{(7)} + b_{i\tilde{c}} + W_{h\tilde{c}}h^{(6)} + b_{h\tilde{c}})$$
(94)

 $= \tanh([30.00, 0.00]^{\top})$  (95)

$$= [1.00, 0.00]^{ op}$$
 (96)

$$f_7$$
 $C_6$ 
 $i_7$ 
 $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>7</sub>)

$$c_7 = f_7 \circ c_6 + i_7 \circ \tilde{c}_7$$
 (97)  
(98)

$$f_7$$
 $C_6$ 
 $i_7$ 
 $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>7</sub>)

$$c_7 = f_7 \circ c_6 + i_7 \circ \tilde{c_7}$$

$$= [1.00, 0.00]^{\top} \circ [0.00, 1.00]^{\top} + [1.00, 0.00]^{\top} \circ [1.00, 0.00]^{\top}$$
(98)
(99)

$$f_7$$
 $C_6$ 
 $i_7$ 
 $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>7</sub>)

$$f_7$$
 $C_6$ 
 $i_7$ 
 $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

 $h_7$ 

Message forward (*c*<sub>7</sub>)

$$c_7 = [1.00, 0.00]^{\top}$$
 (97)

New hidden (h<sub>7</sub>)

$$f_7$$
 $C_6$ 
 $i_7$ 
 $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>7</sub>)

$$c_7 = [1.00, 0.00]^{\top}$$
 (97)

New hidden (h<sub>7</sub>)

$$h_7 = o_7 \circ \tanh(c_7) \tag{98}$$

(99)

 $f_7$   $C_6$   $i_7$   $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$   $[0.00, 1.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (*c*<sub>7</sub>)

$$c_7 = [1.00, 0.00]^{\top}$$
 (97)

New hidden (*h*<sub>7</sub>)

$$h_7 = o_7 \circ \tanh(c_7) \tag{98}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([1.00, 0.00]^{\top})$$
 (99)

(100)

 $f_7$   $C_6$   $i_7$   $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$   $[0.00, 1.00]^{\top}$   $[1.00, 0.00]^{\top}$   $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>7</sub>)

$$c_7 = [1.00, 0.00]^{\top}$$
 (97)

New hidden (h<sub>7</sub>)

$$h_7 = o_7 \circ \tanh(c_7) \tag{98}$$

$$= [1.00, 1.00]^{\top} \circ \tanh([1.00, 0.00]^{\top})$$
 (99)

$$=$$
[0.76, 0.00] <sup>$\top$</sup>  (100)

$$f_7$$
 $C_6$ 
 $i_7$ 
 $\tilde{C}_7$ 
 $[1.00, 0.00]^{\top}$ 
 $[0.00, 1.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 
 $[1.00, 0.00]^{\top}$ 

Message forward (c<sub>7</sub>)


$$c_7 = [1.00, 0.00]^{\top}$$
 (97)

New hidden (h<sub>7</sub>)


$$h_7 = [0.76, 0.00]^{\top}$$
 (98)

• Prediction  $y_7 = \operatorname{softmax}(h_7) = 0$ 

## Summary at t = 7

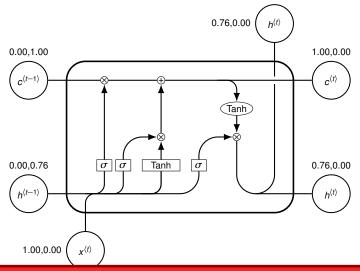

## Summary at t = 7

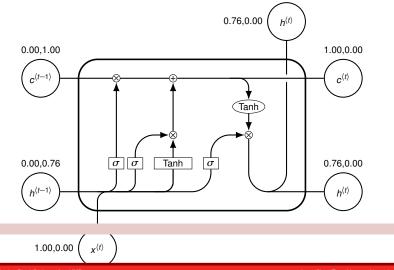

#### What's going on?

- What's the classification?
- What inputs are important?
- When can things be forgotten?
- How would other sequences be classified?