



Parallel Networks and File Systems

Abhinav Bhatele, Department of Computer Science



UNIVERSITY OF
MARYLAND

Announcements

- Assignment 4 extra credit due on Dec 6
- Assignment 5 posted online due on Nov 23
 - Only for 818X students
 - 416 students: extra credit also due on Nov 23
- Quiz 3: due on Nov 19 11:59 pm

High-speed interconnection networks

- Typically supercomputers and HPC clusters are connected by low latency and high bandwidth networks
- The connections between nodes form different topologies
- Popular topologies:
 - Fat-tree: Charles Leiserson in 1985
 - Mesh and torus networks
 - Dragonfly networks


Network components

- Network interface controller or card
- Router or switch
- Network cables: copper or optical



N-dimensional mesh / torus networks

- Each switch has a small number of nodes connected to it (typically 4)
- Each switch has direct links to $2n$ switches where n is the number of dimensions
- Torus = wraparound links
- Examples: IBM Blue Gene, Cray X* machines

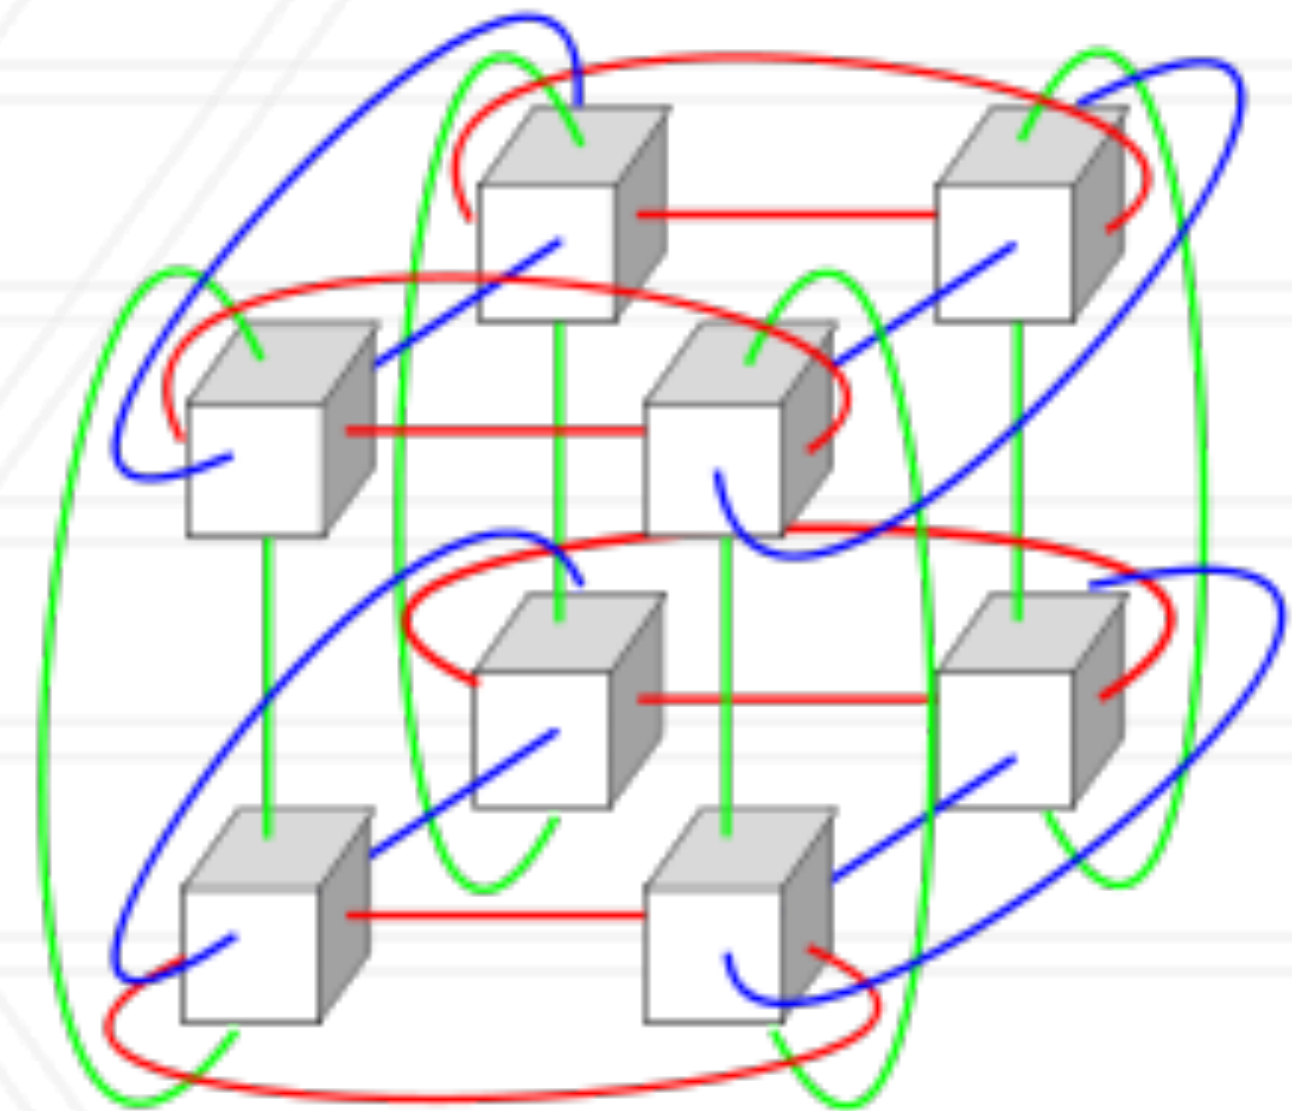

Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

Fat-tree network


- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

Compute
Nodes




Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

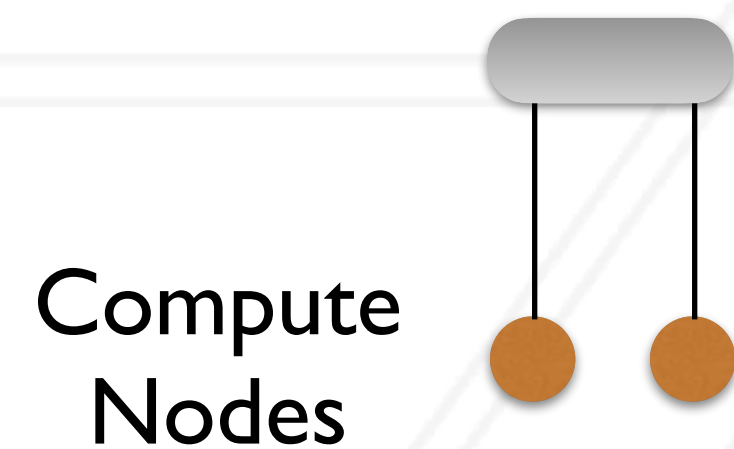


Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

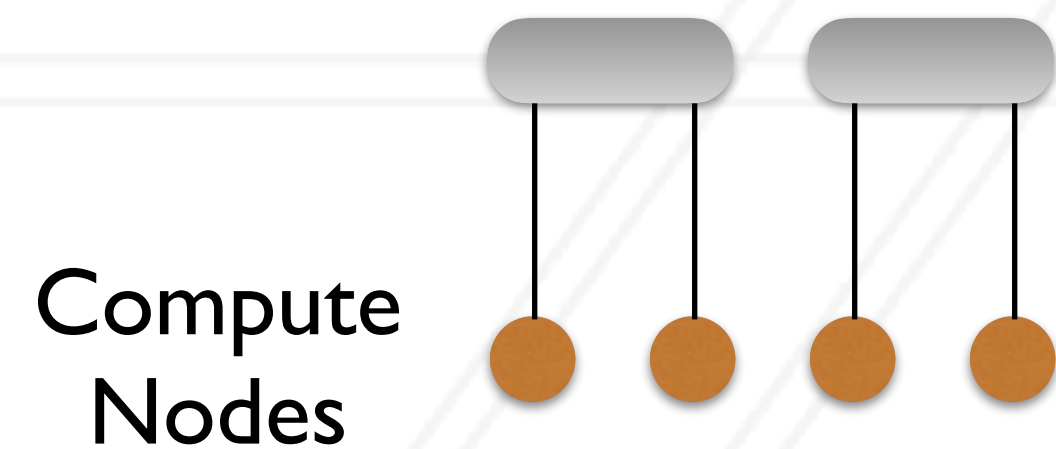


Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

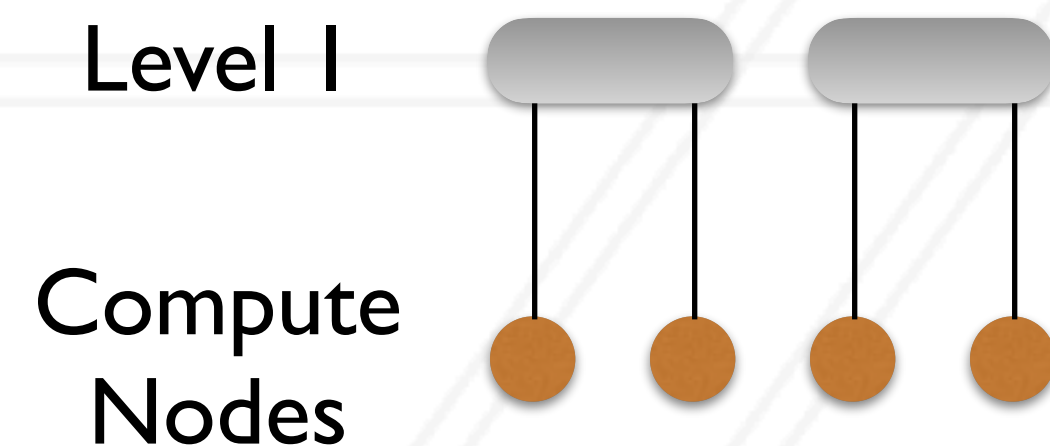


Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

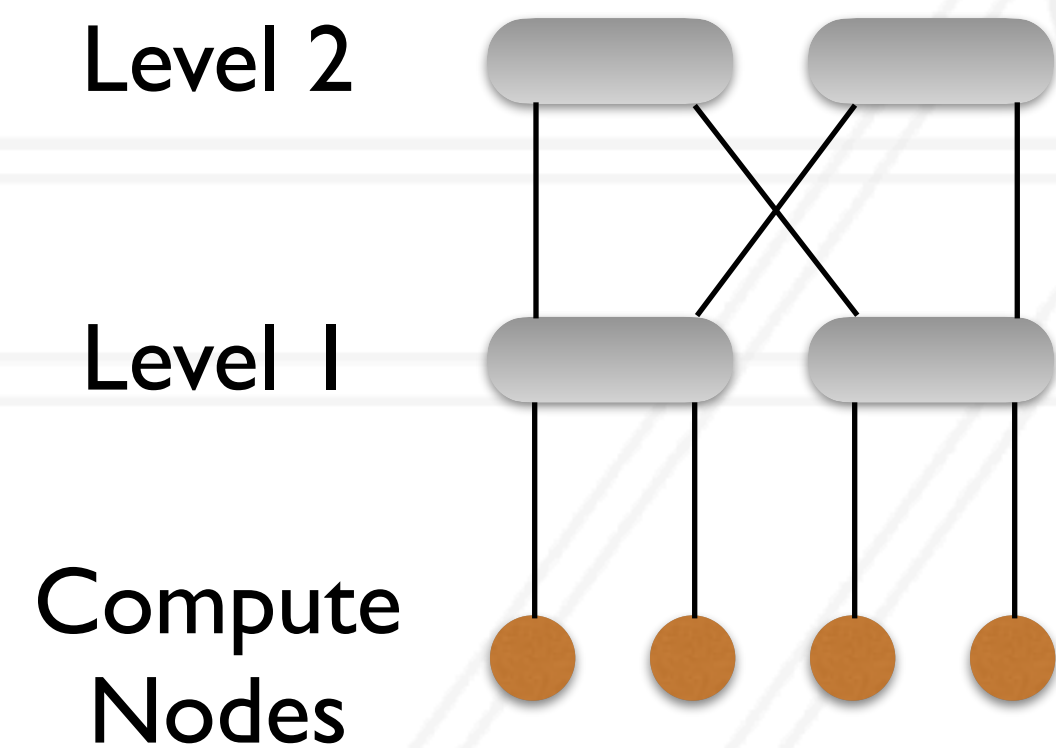


Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

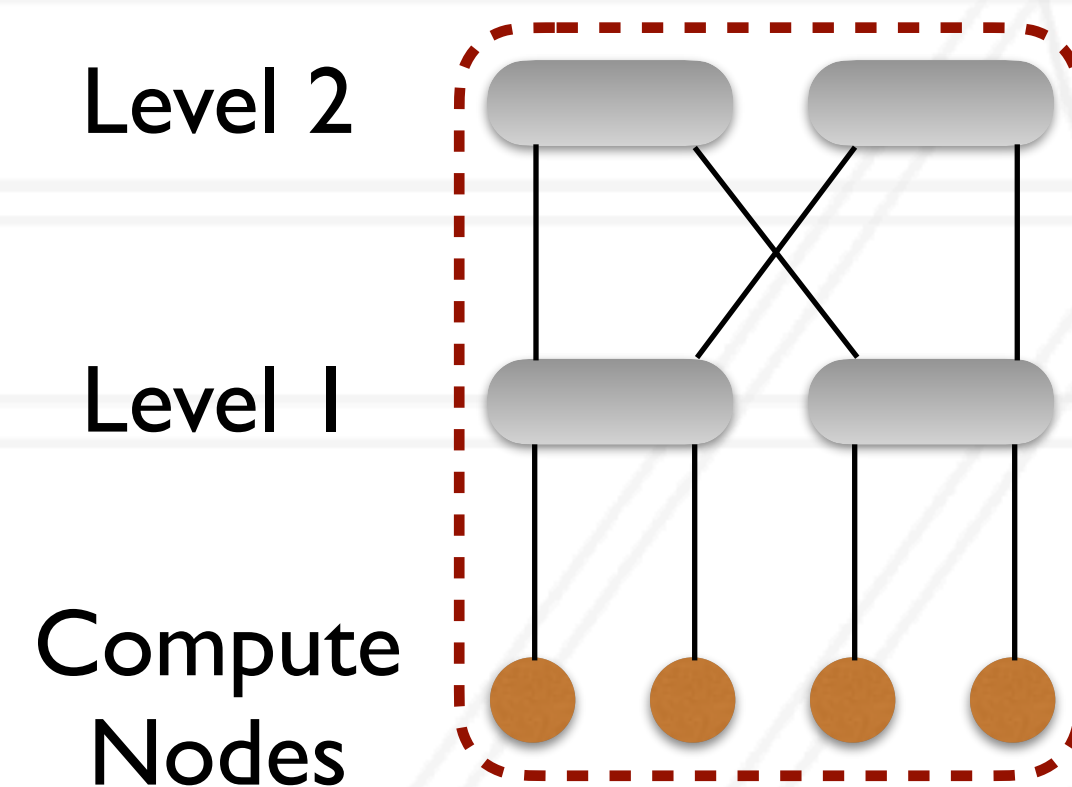


Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

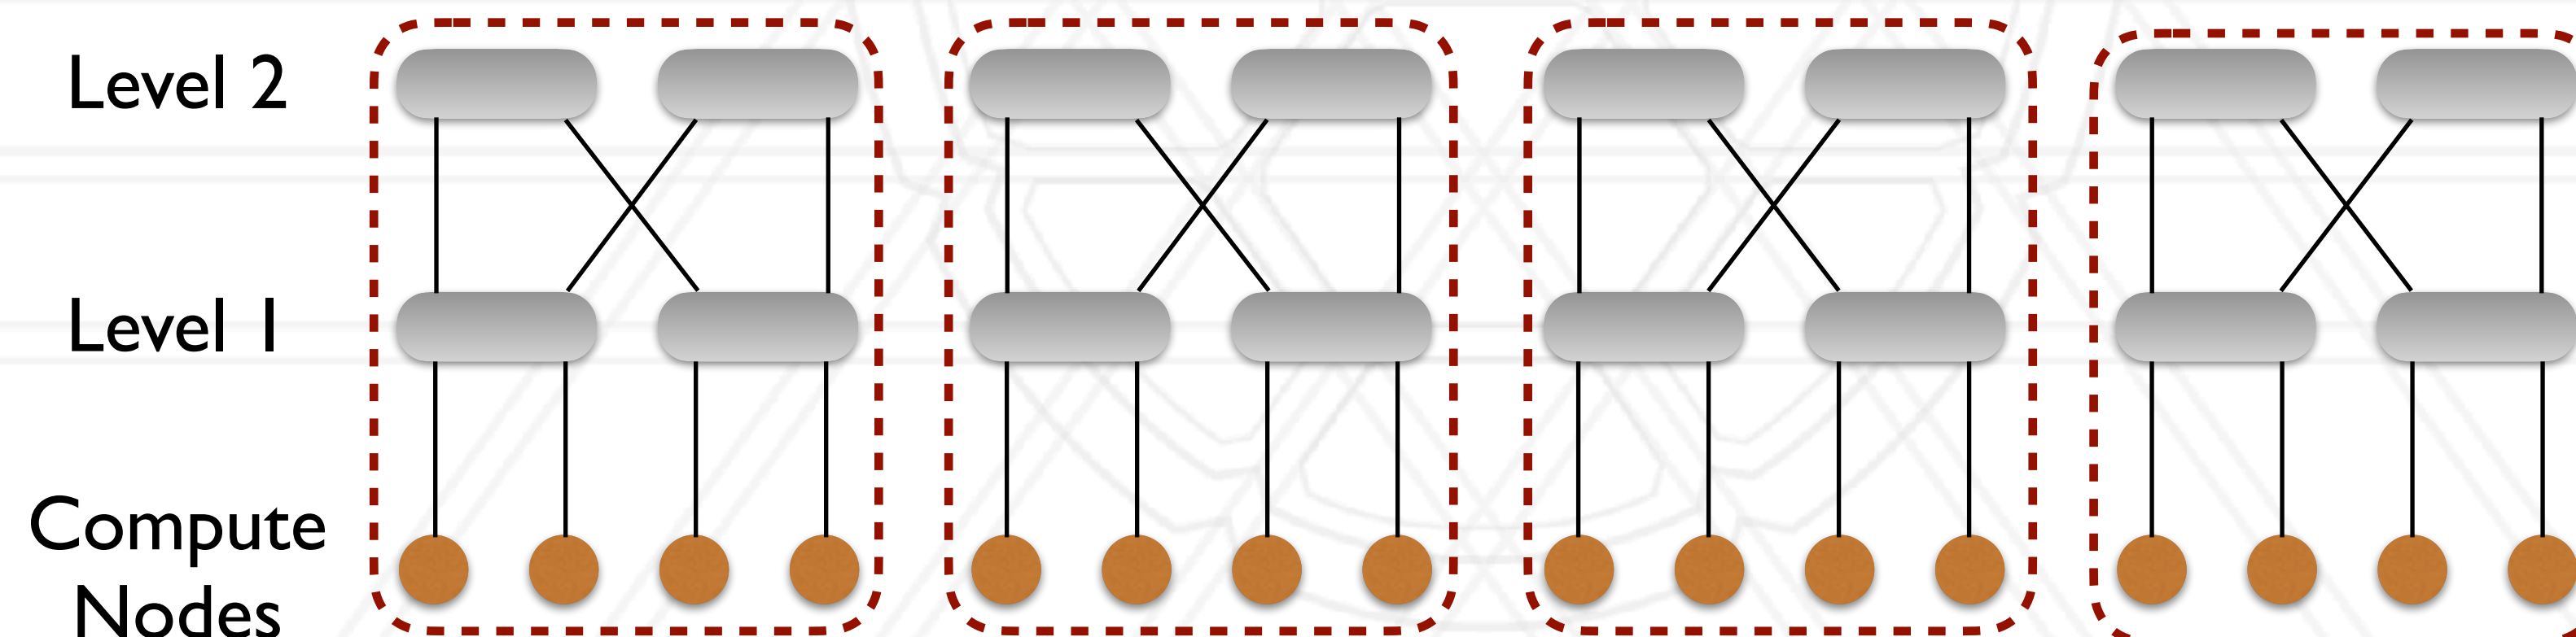


Fat-tree network

- Router radix = k , Number of nodes on each router = $k/2$
- A pod is a group of $k/2$ switches, Max. number of pods = k

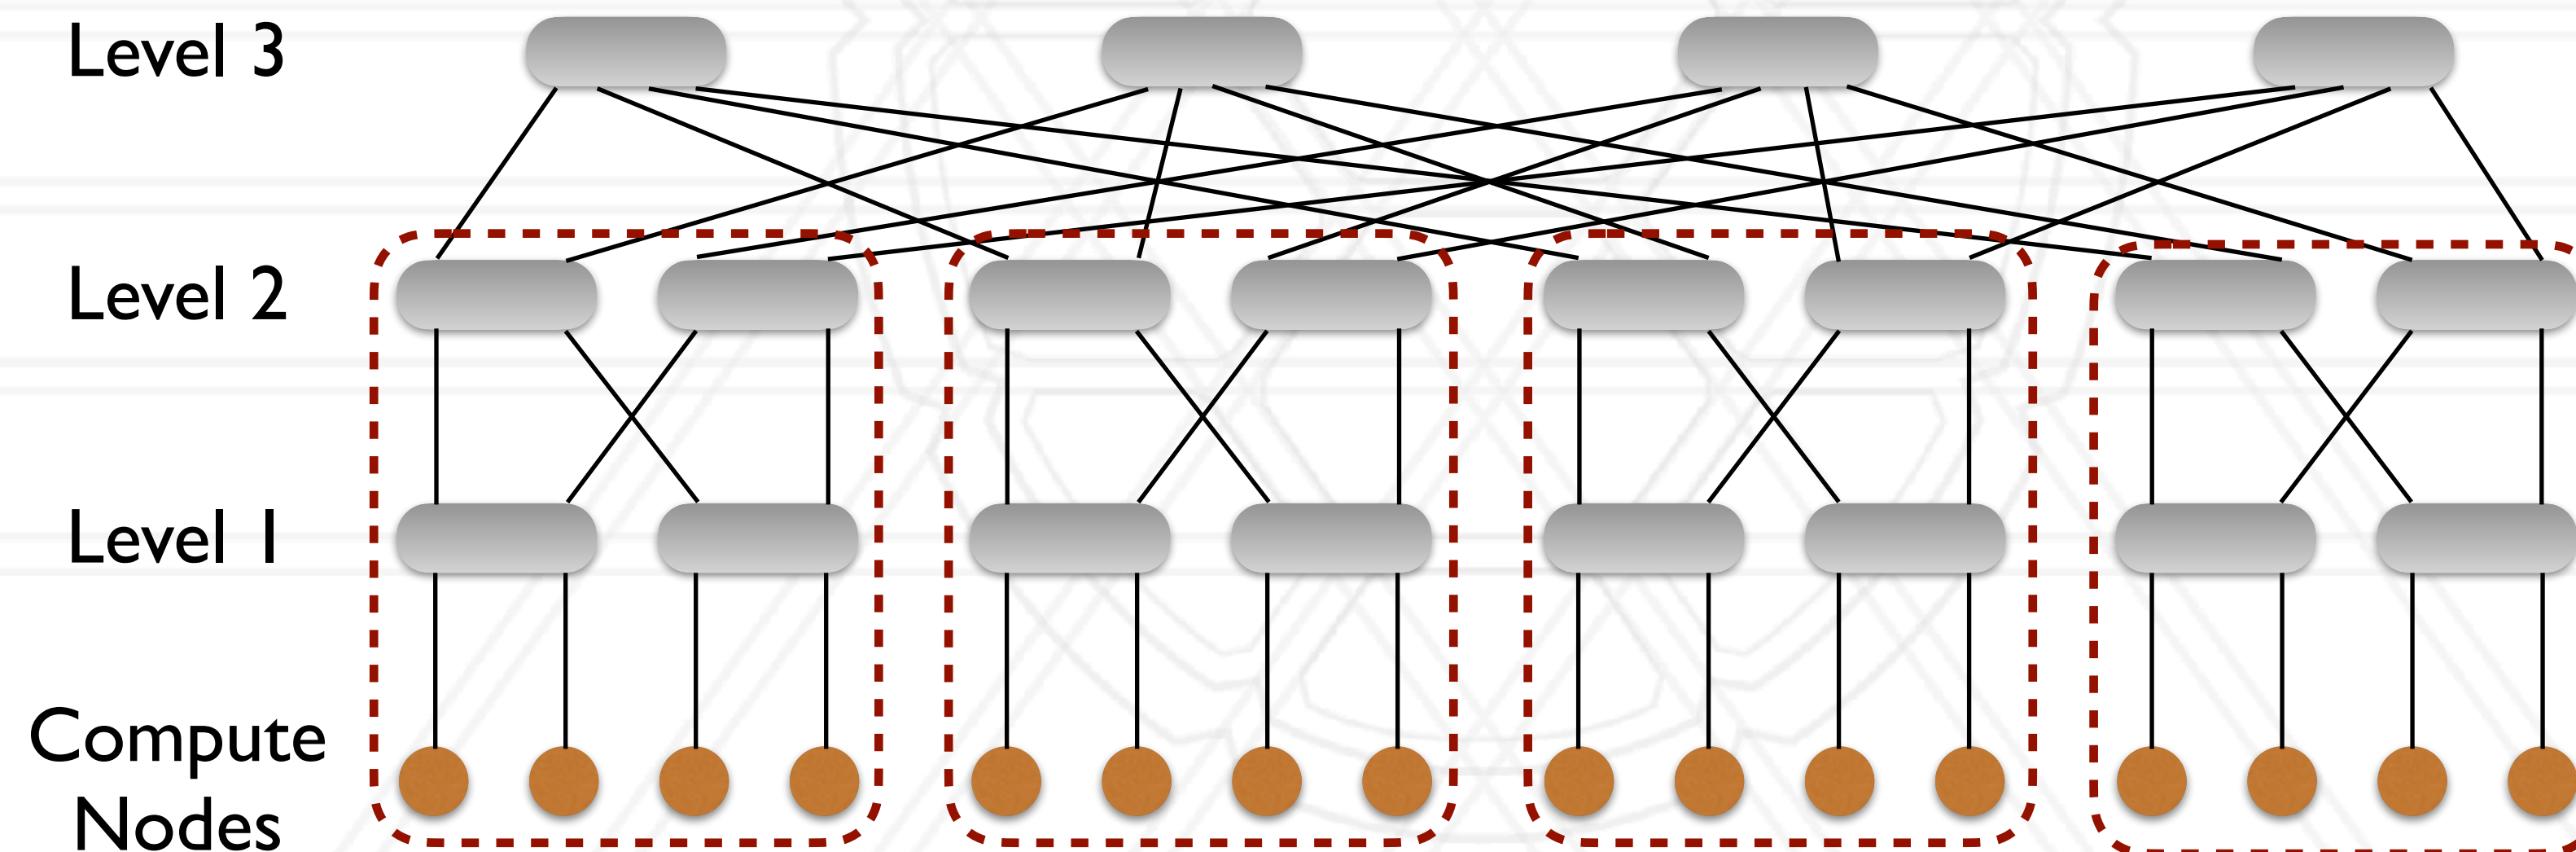

Dragonfly network

- Two-level hierarchical network using high-radix routers
- Low network diameter

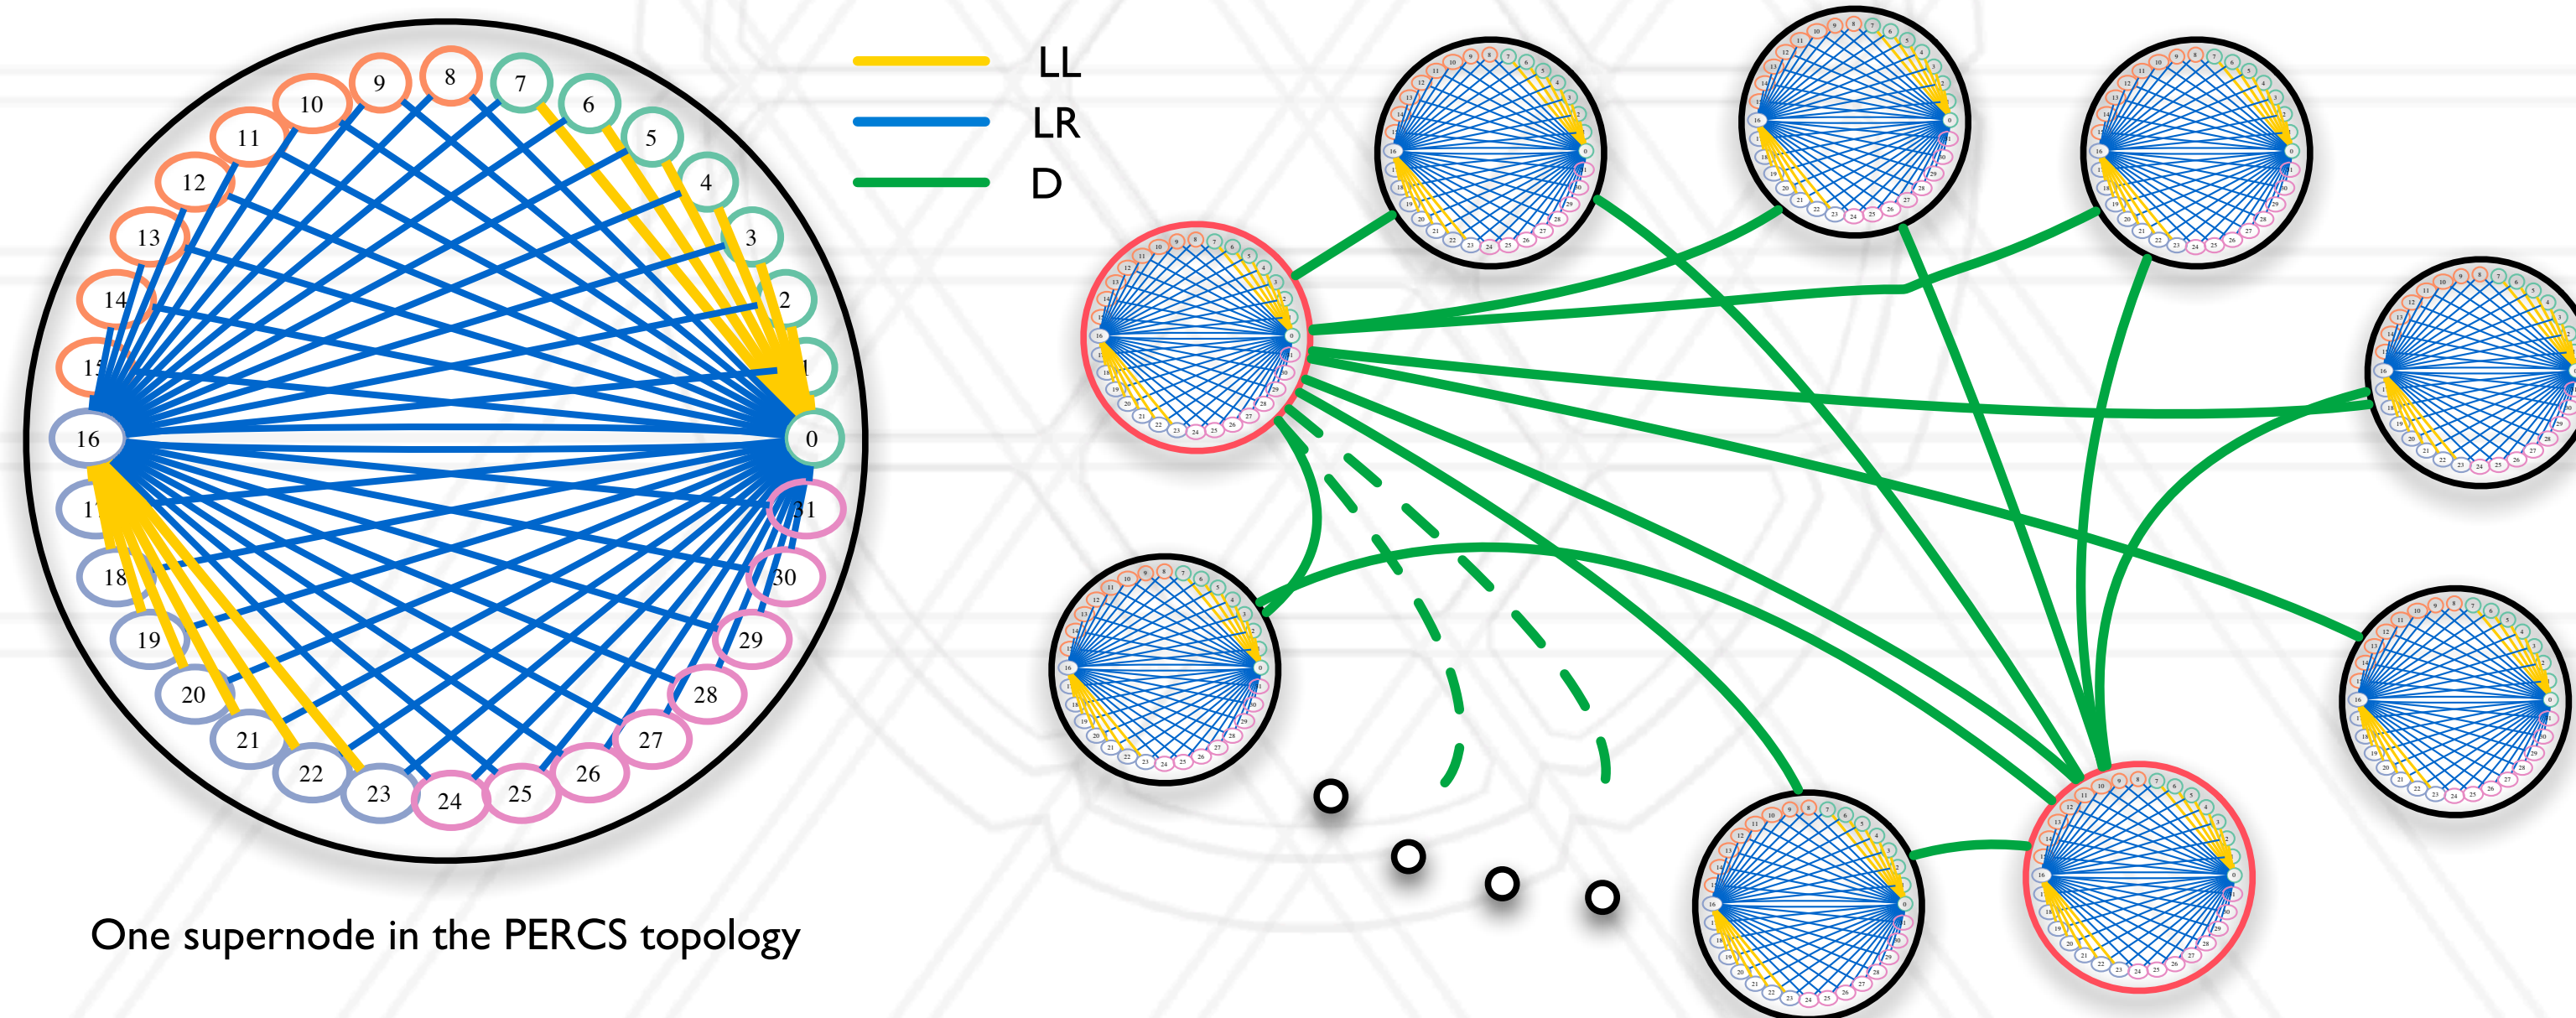

Life-cycle of a message

Source

Source


Source

Source

Source


Message origin points :
destination, frequency,
size, etc. determined
by application
1 micro sec - 10s of sec

Life-cycle of a message

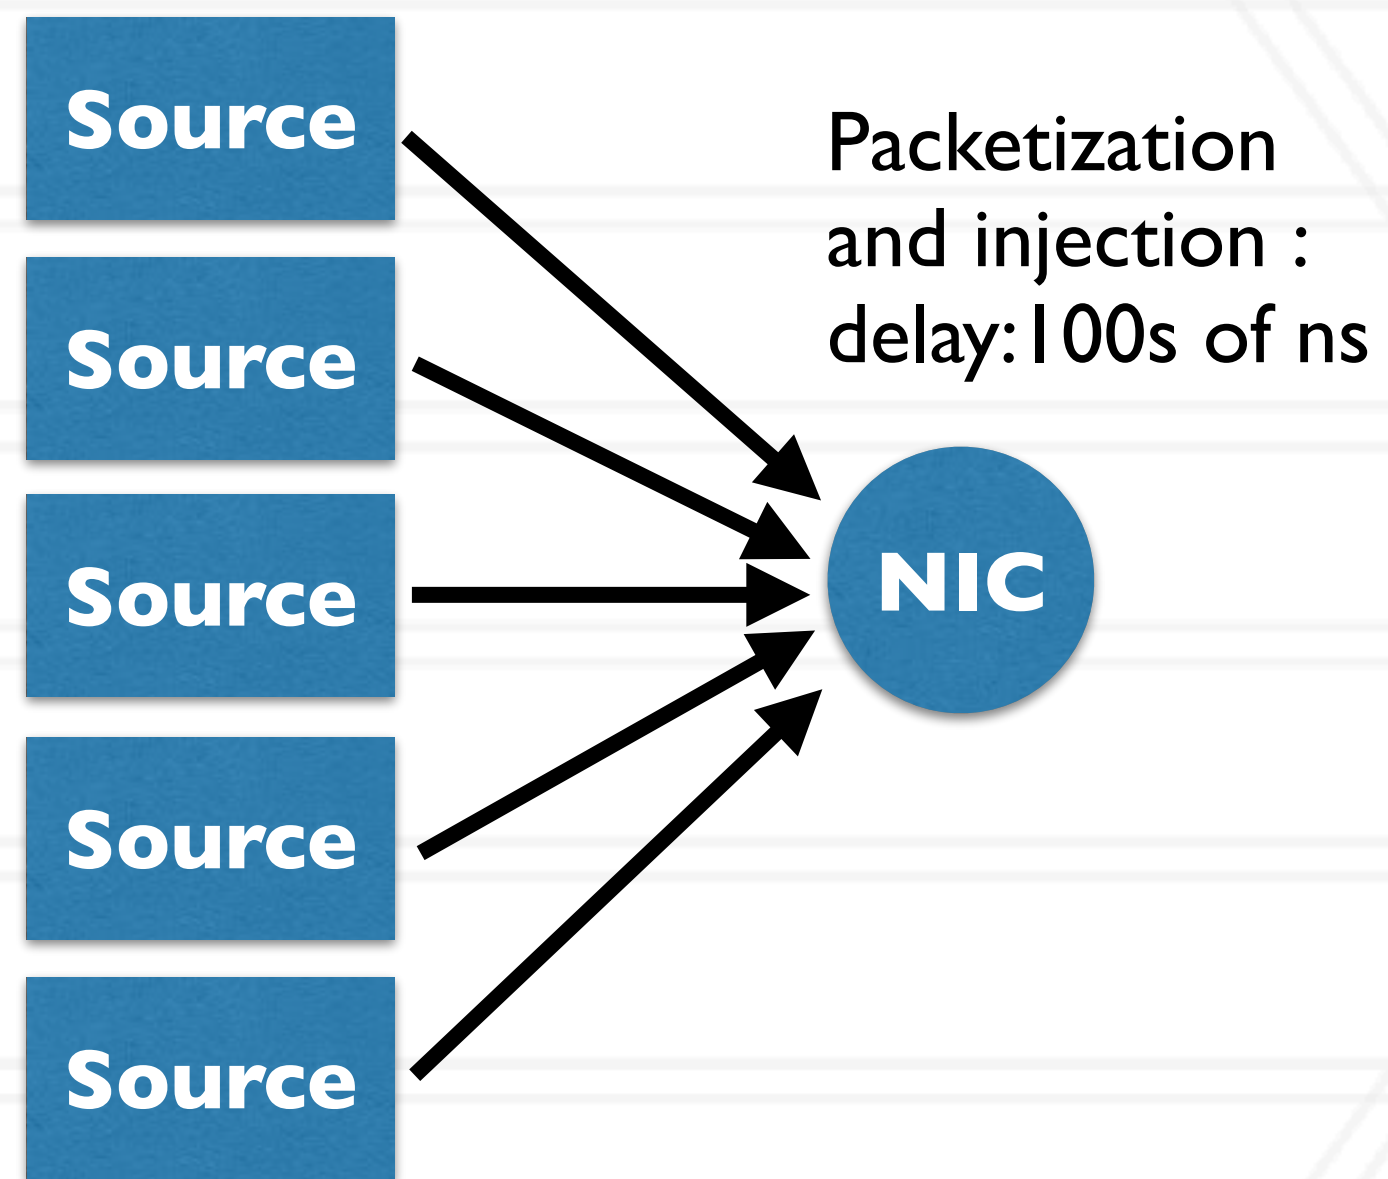


Message origin points :
destination, frequency,
size, etc. determined
by application
1 micro sec - 10s of sec

Life-cycle of a message

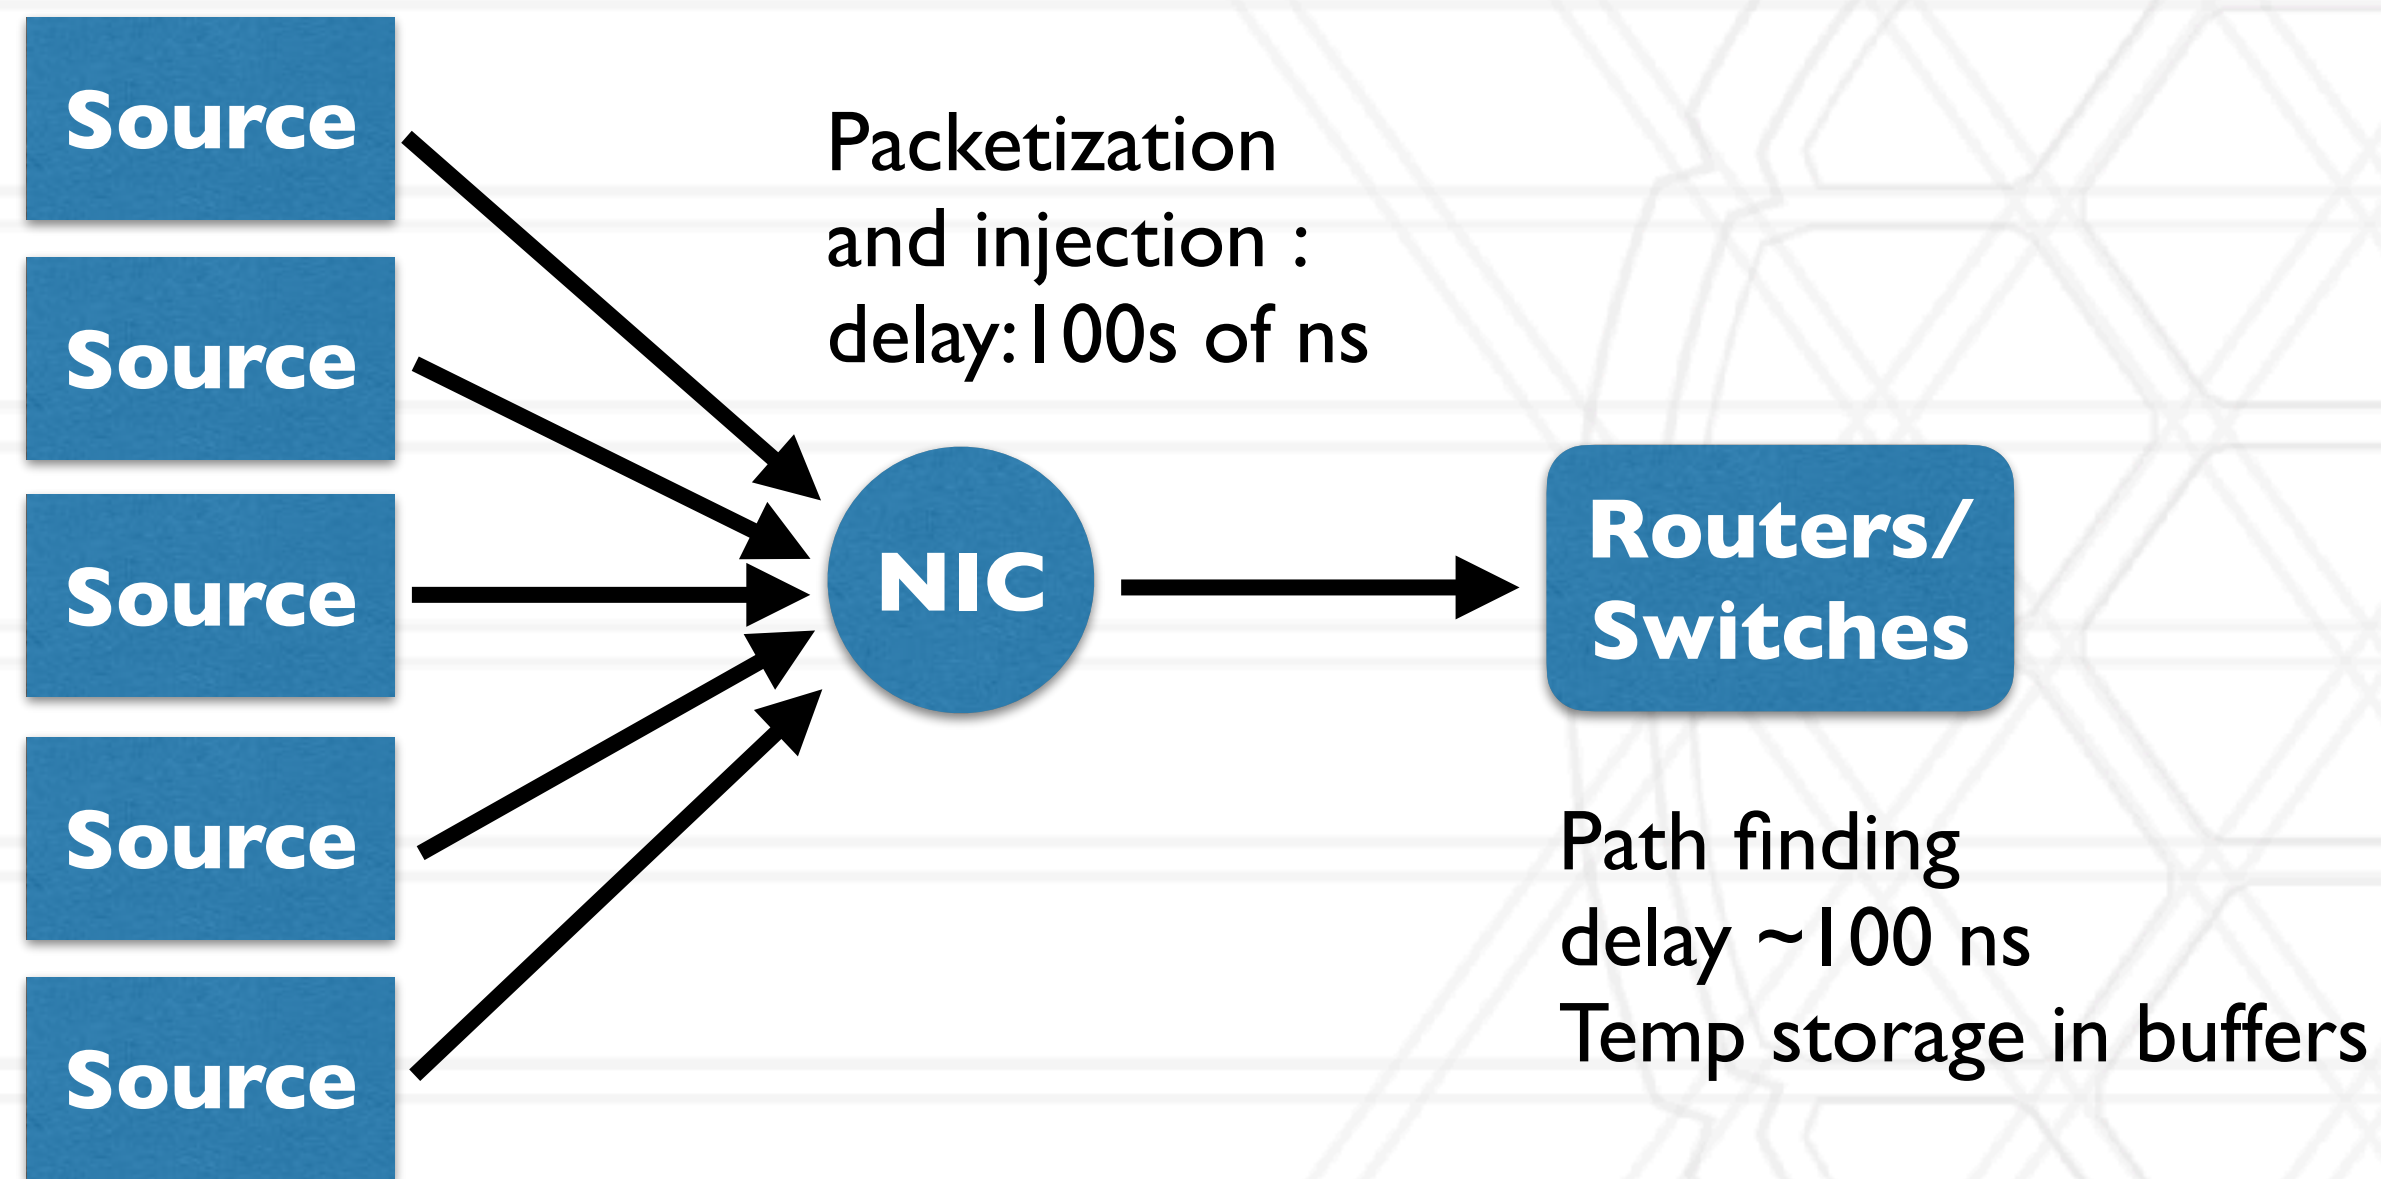


Message origin points :
destination, frequency,
size, etc. determined
by application
1 micro sec - 10s of sec

Life-cycle of a message

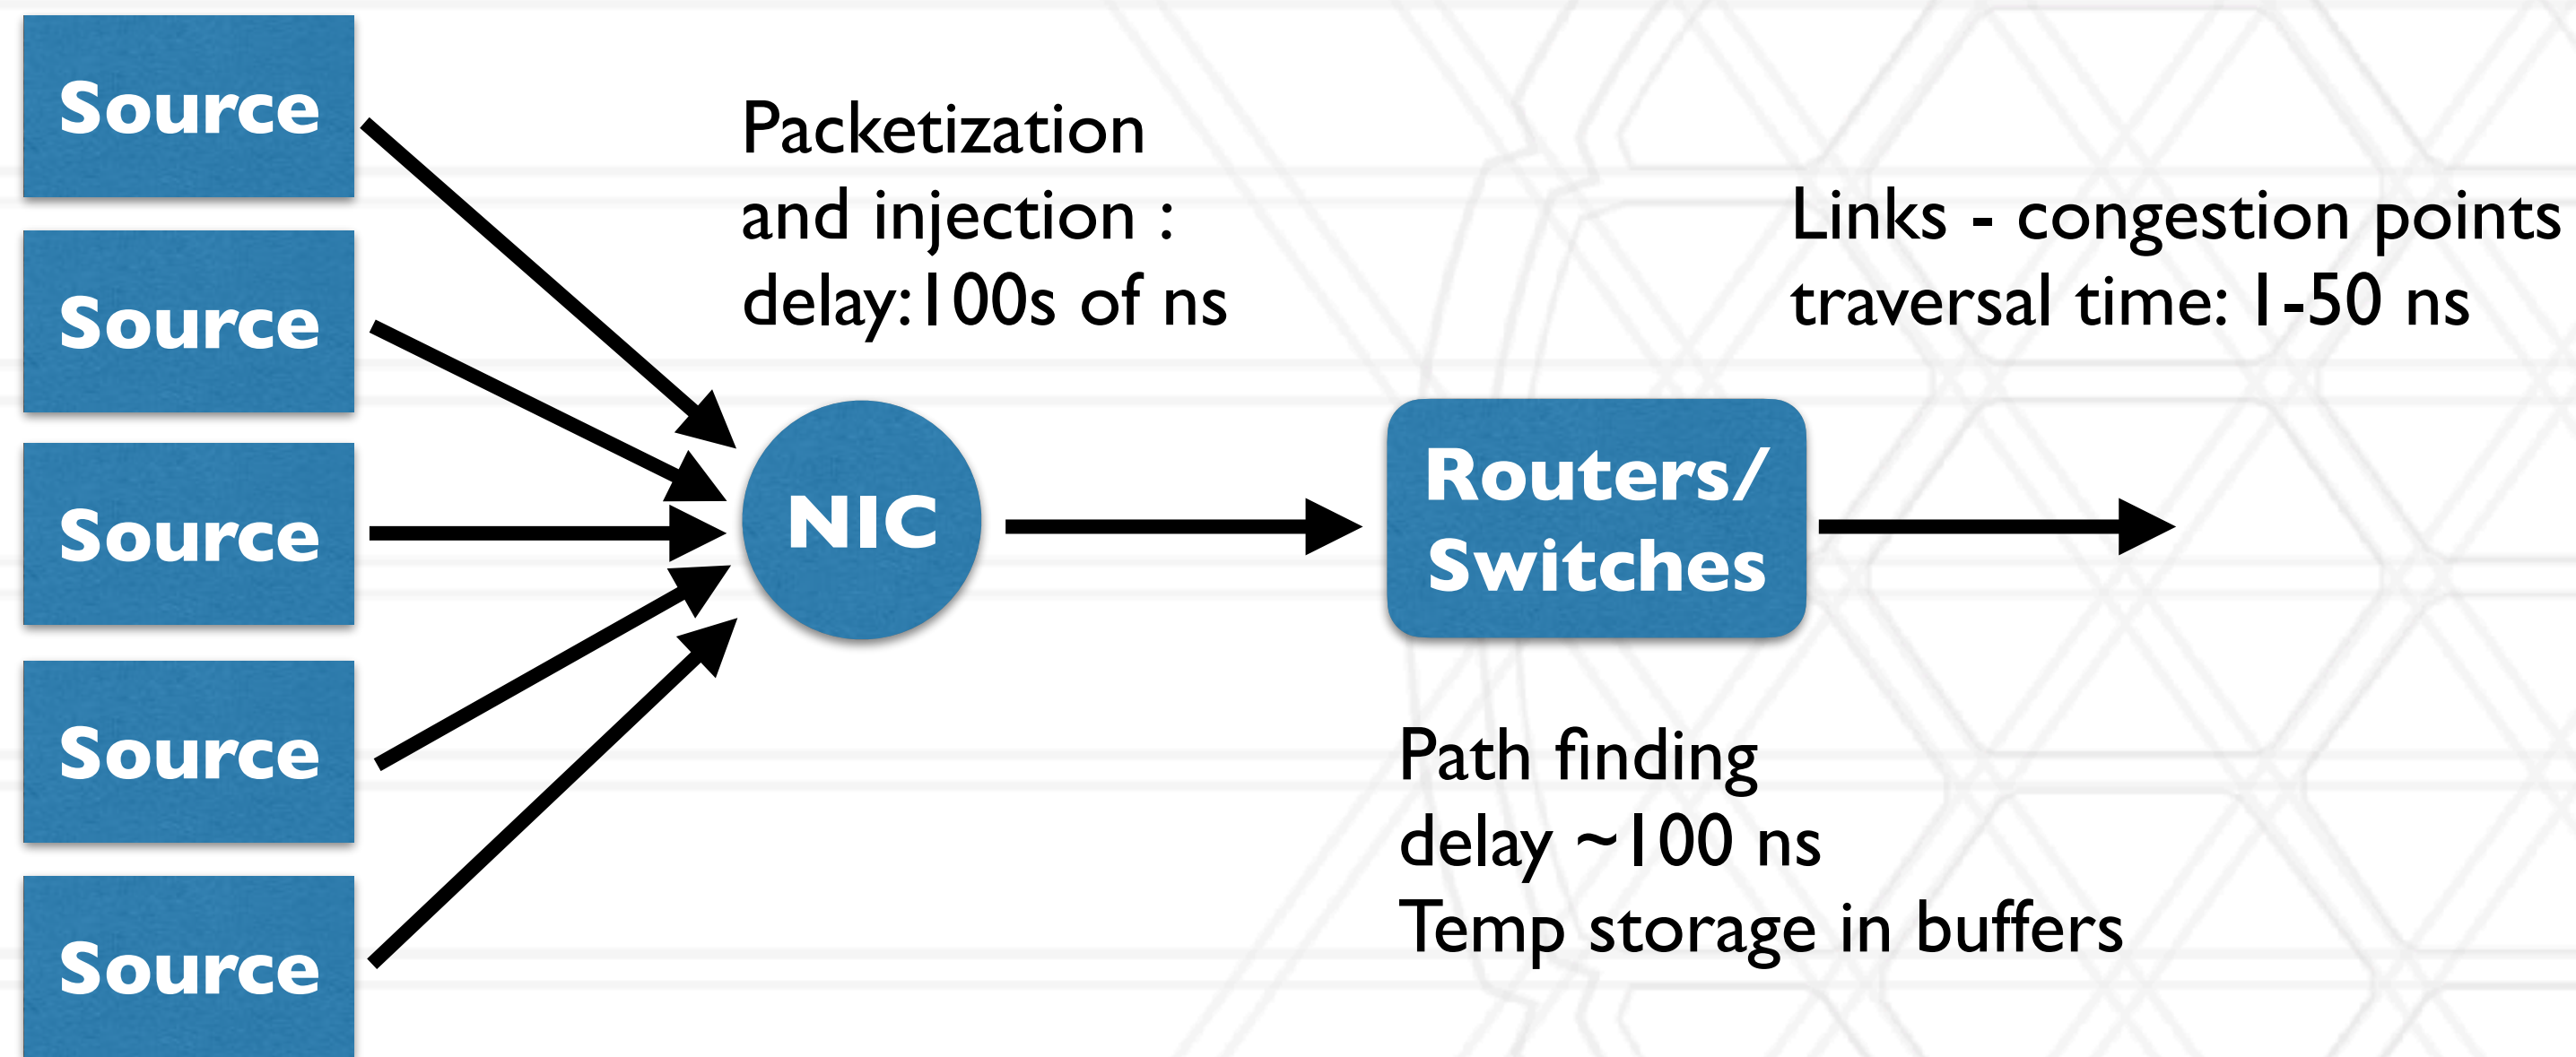

Message origin points :
destination, frequency,
size, etc. determined
by application
1 micro sec - 10s of sec


Life-cycle of a message

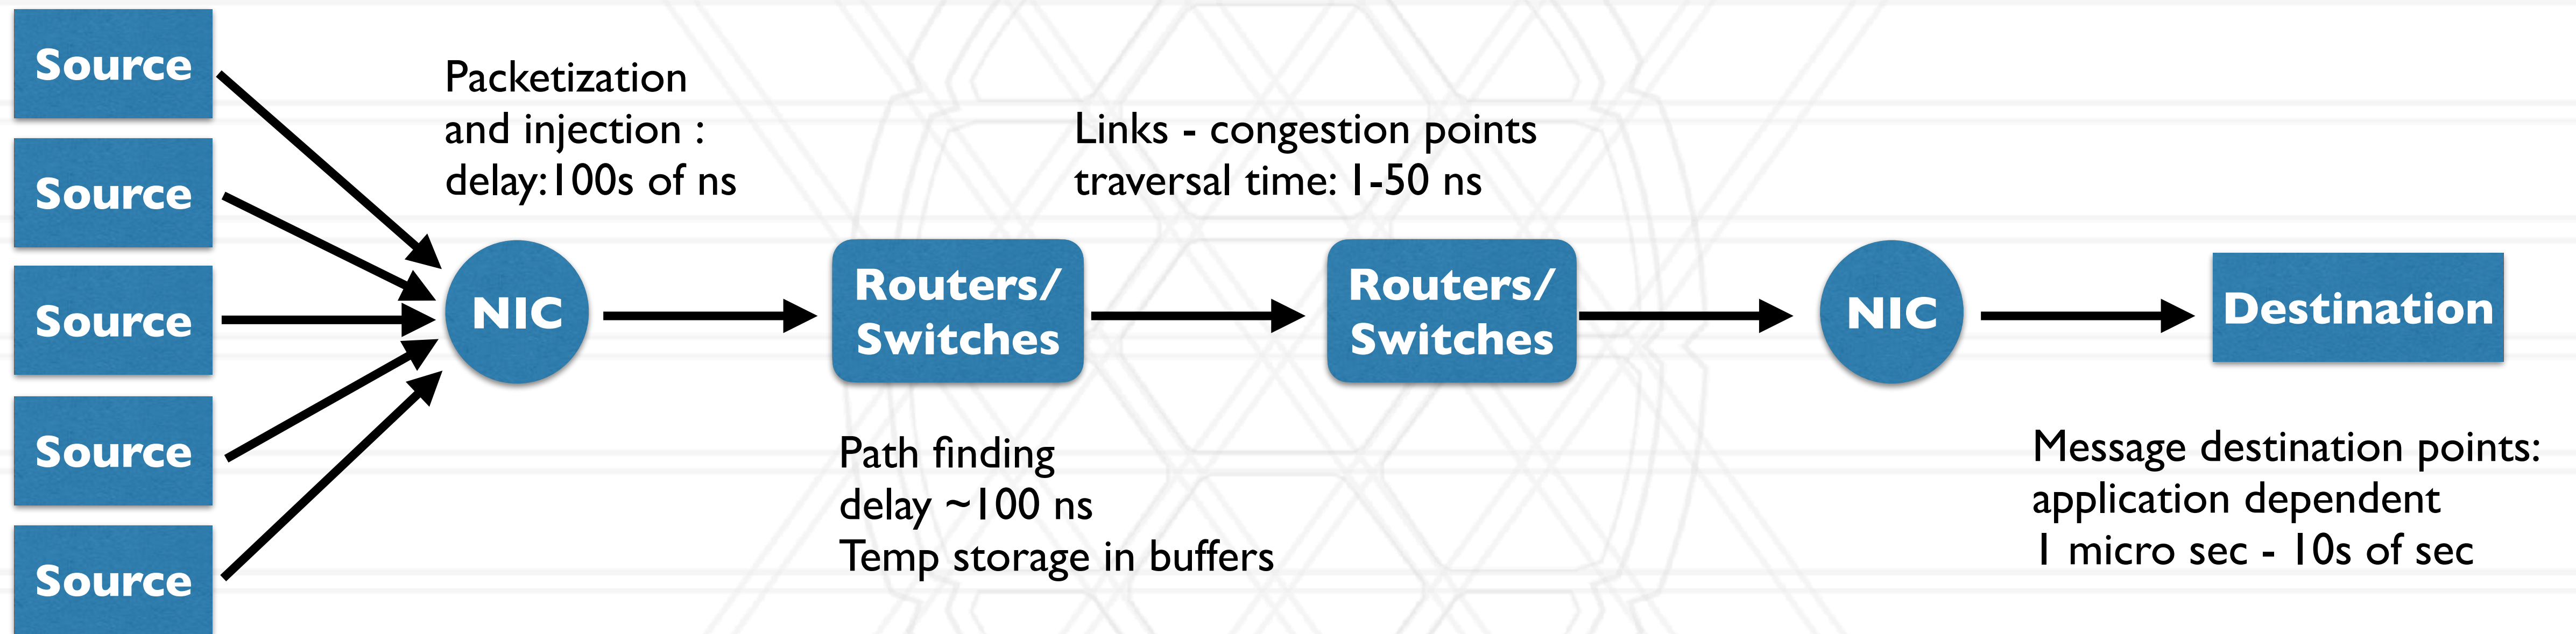

Message origin points :
destination, frequency,
size, etc. determined
by application
1 micro sec - 10s of sec


Congestion due to network sharing

- Sharing refers to network flows of different programs using the same hardware resources: links, switches
- When multiple programs communicate on the network, they all suffer from congestion on shared links

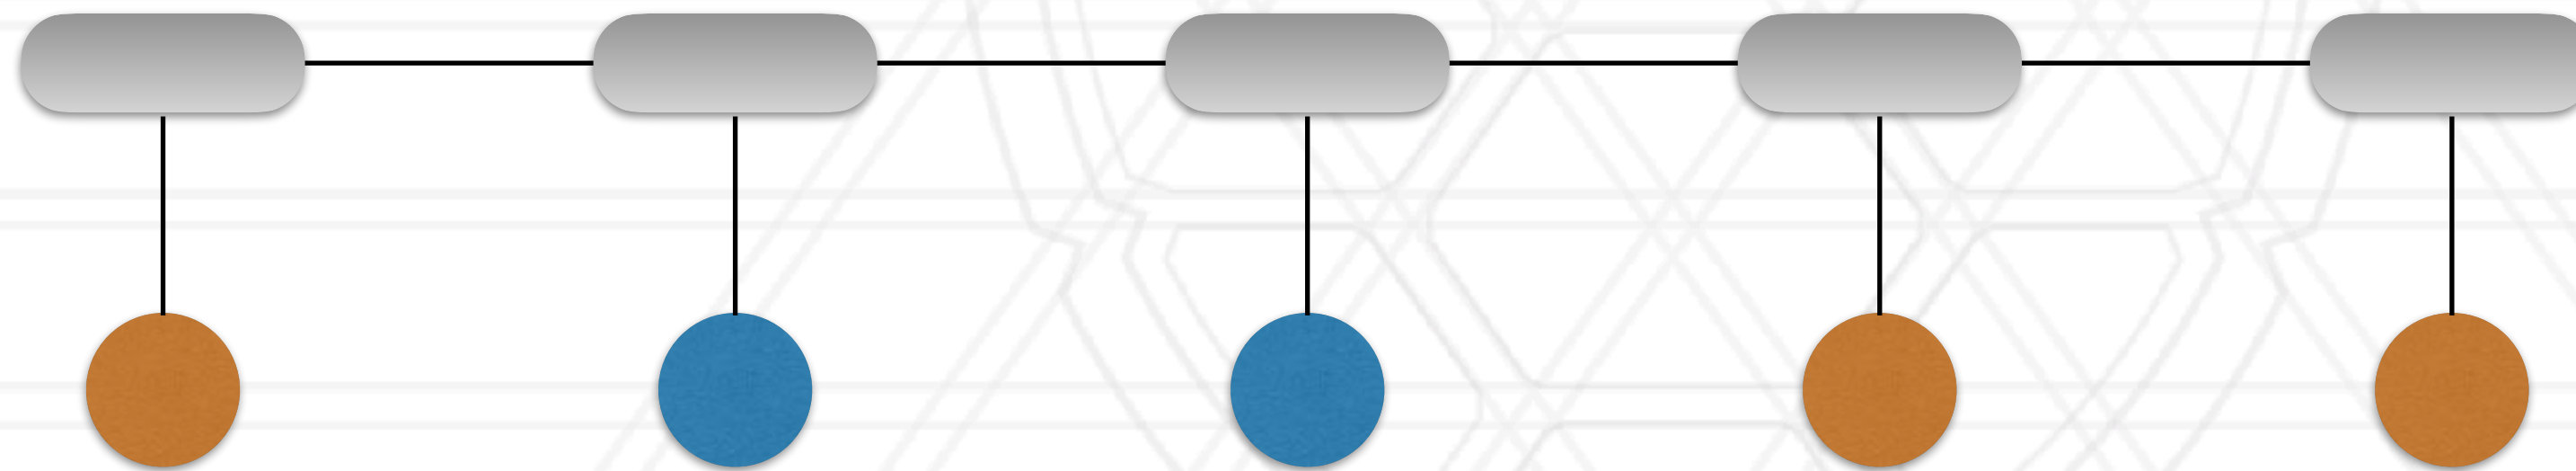


Congestion due to network sharing

- Sharing refers to network flows of different programs using the same hardware resources: links, switches
- When multiple programs communicate on the network, they all suffer from congestion on shared links

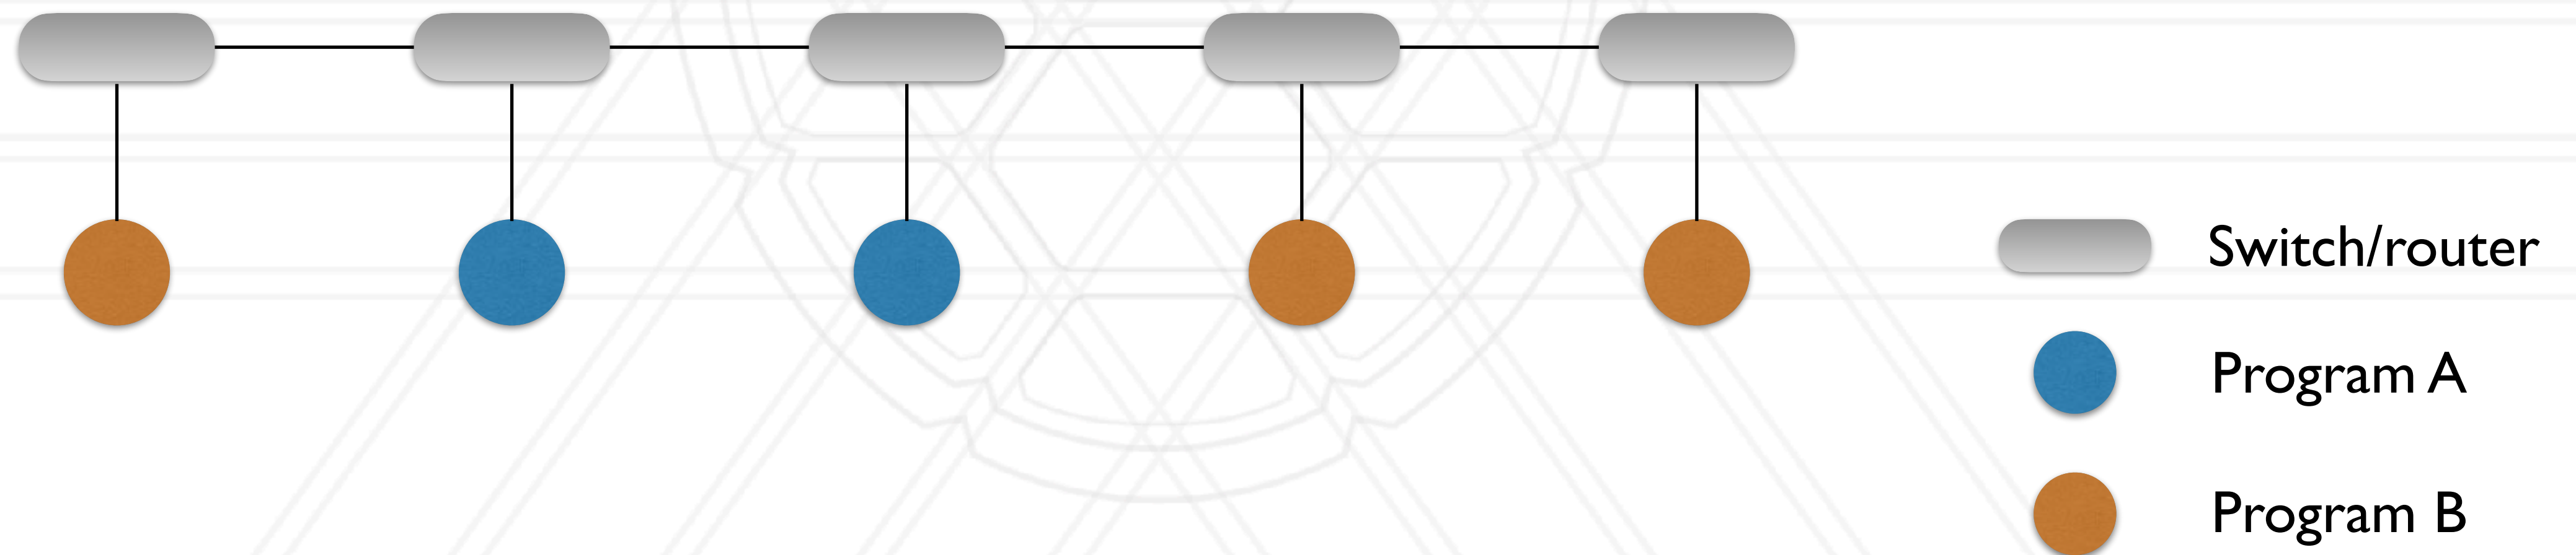


Congestion due to network sharing

- Sharing refers to network flows of different programs using the same hardware resources: links, switches
- When multiple programs communicate on the network, they all suffer from congestion on shared links

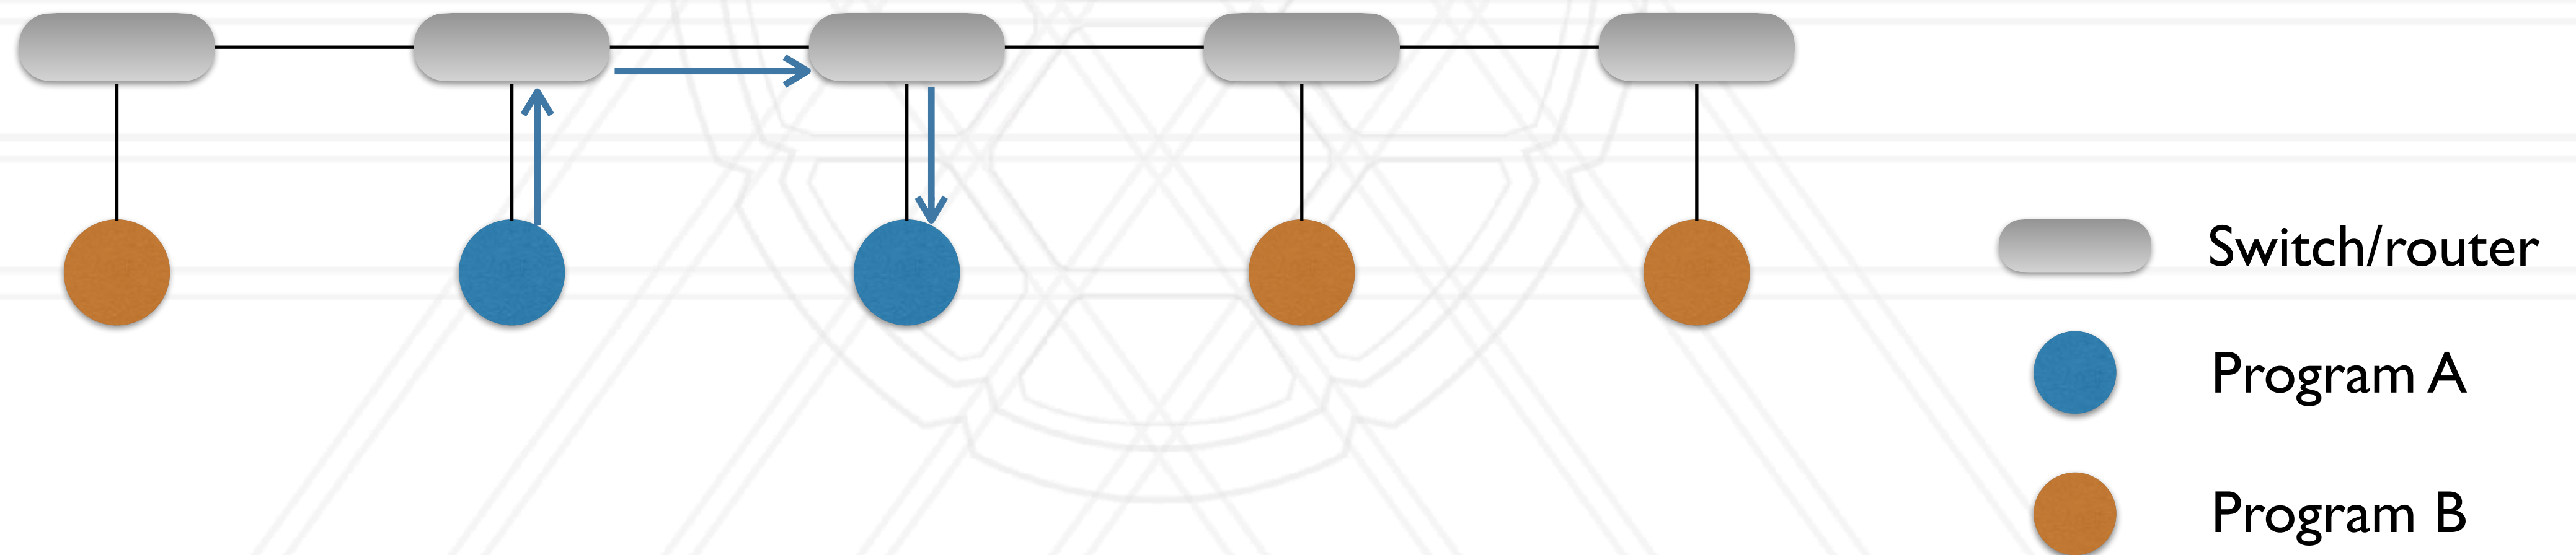


Congestion due to network sharing

- Sharing refers to network flows of different programs using the same hardware resources: links, switches
- When multiple programs communicate on the network, they all suffer from congestion on shared links

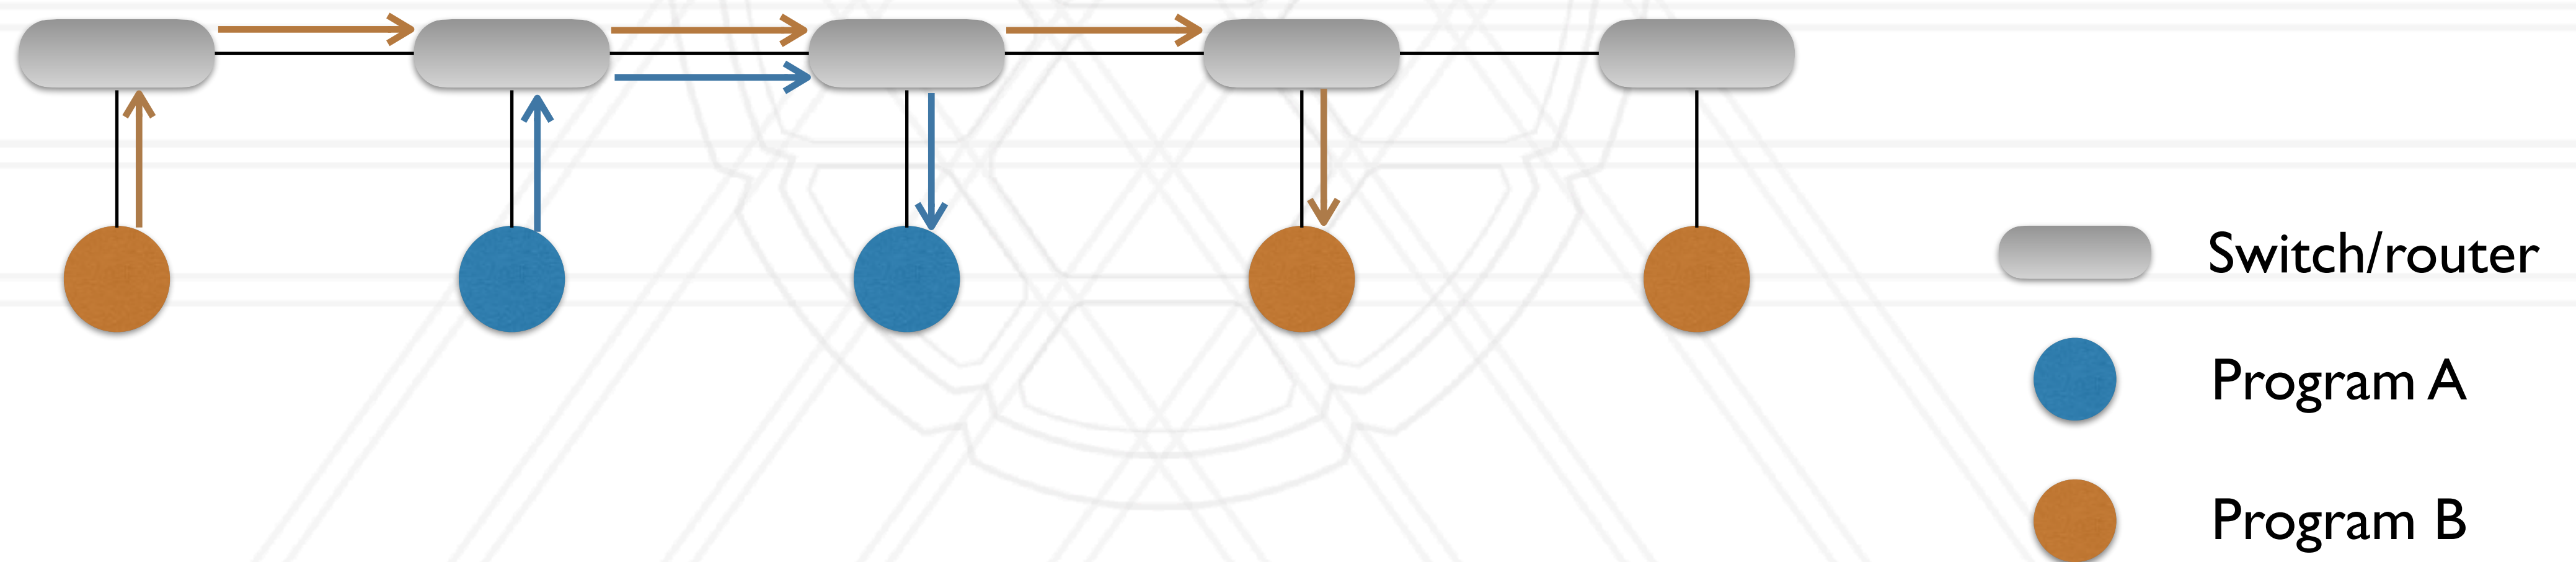


Congestion due to network sharing

- Sharing refers to network flows of different programs using the same hardware resources: links, switches
- When multiple programs communicate on the network, they all suffer from congestion on shared links

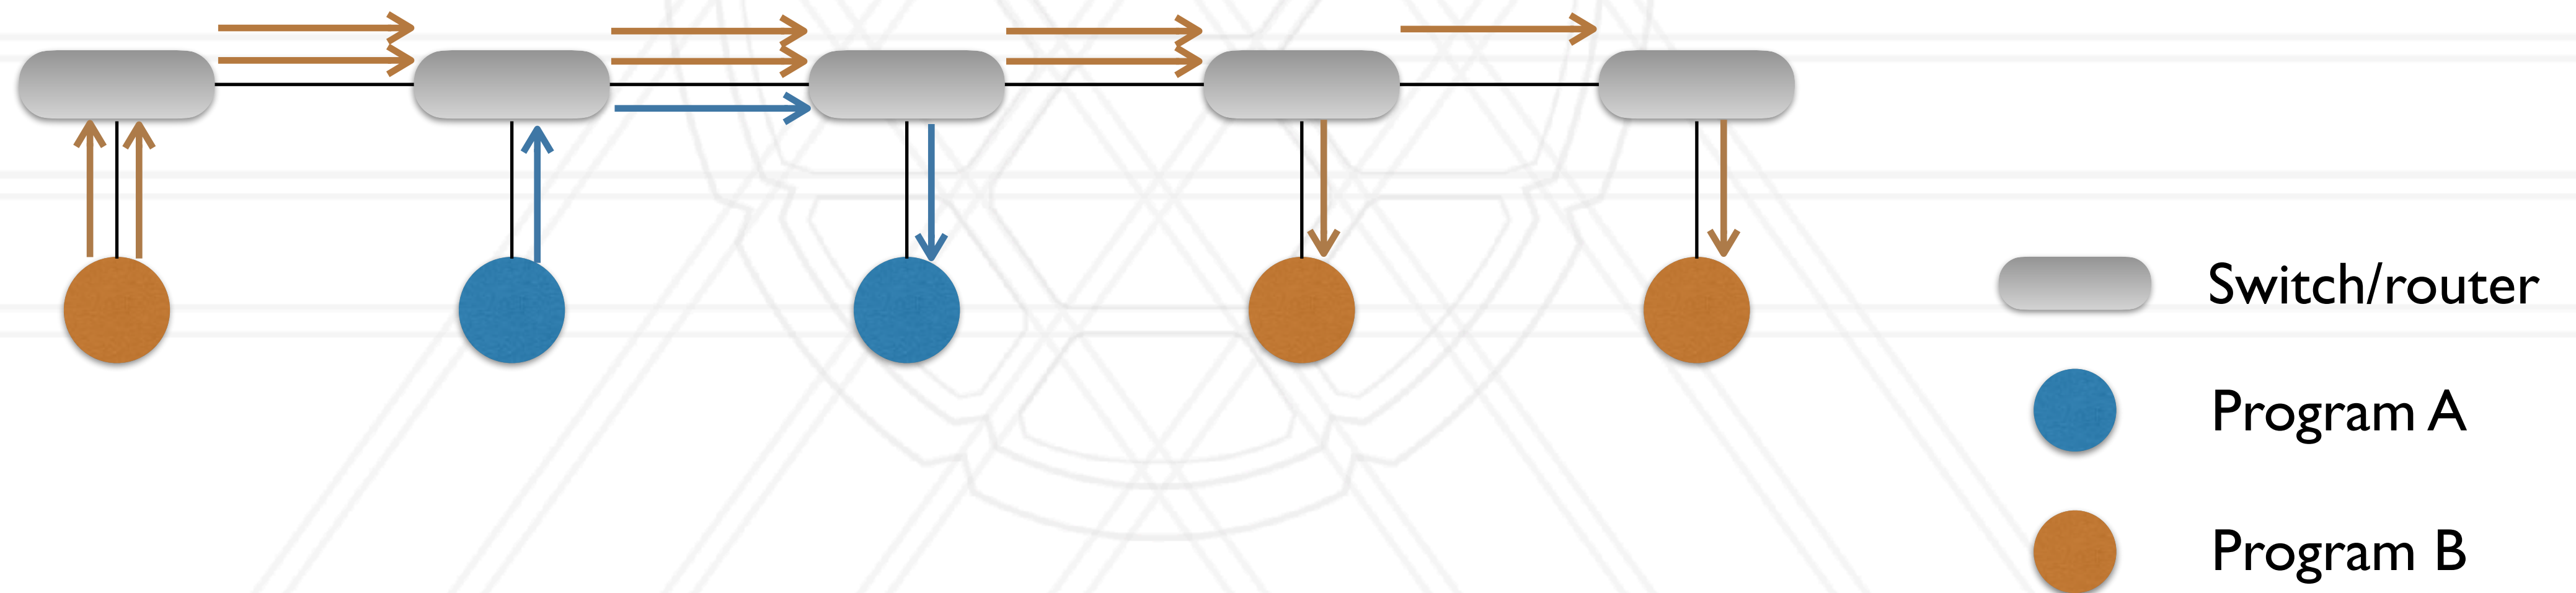

Congestion due to network sharing

- Sharing refers to network flows of different programs using the same hardware resources: links, switches
- When multiple programs communicate on the network, they all suffer from congestion on shared links

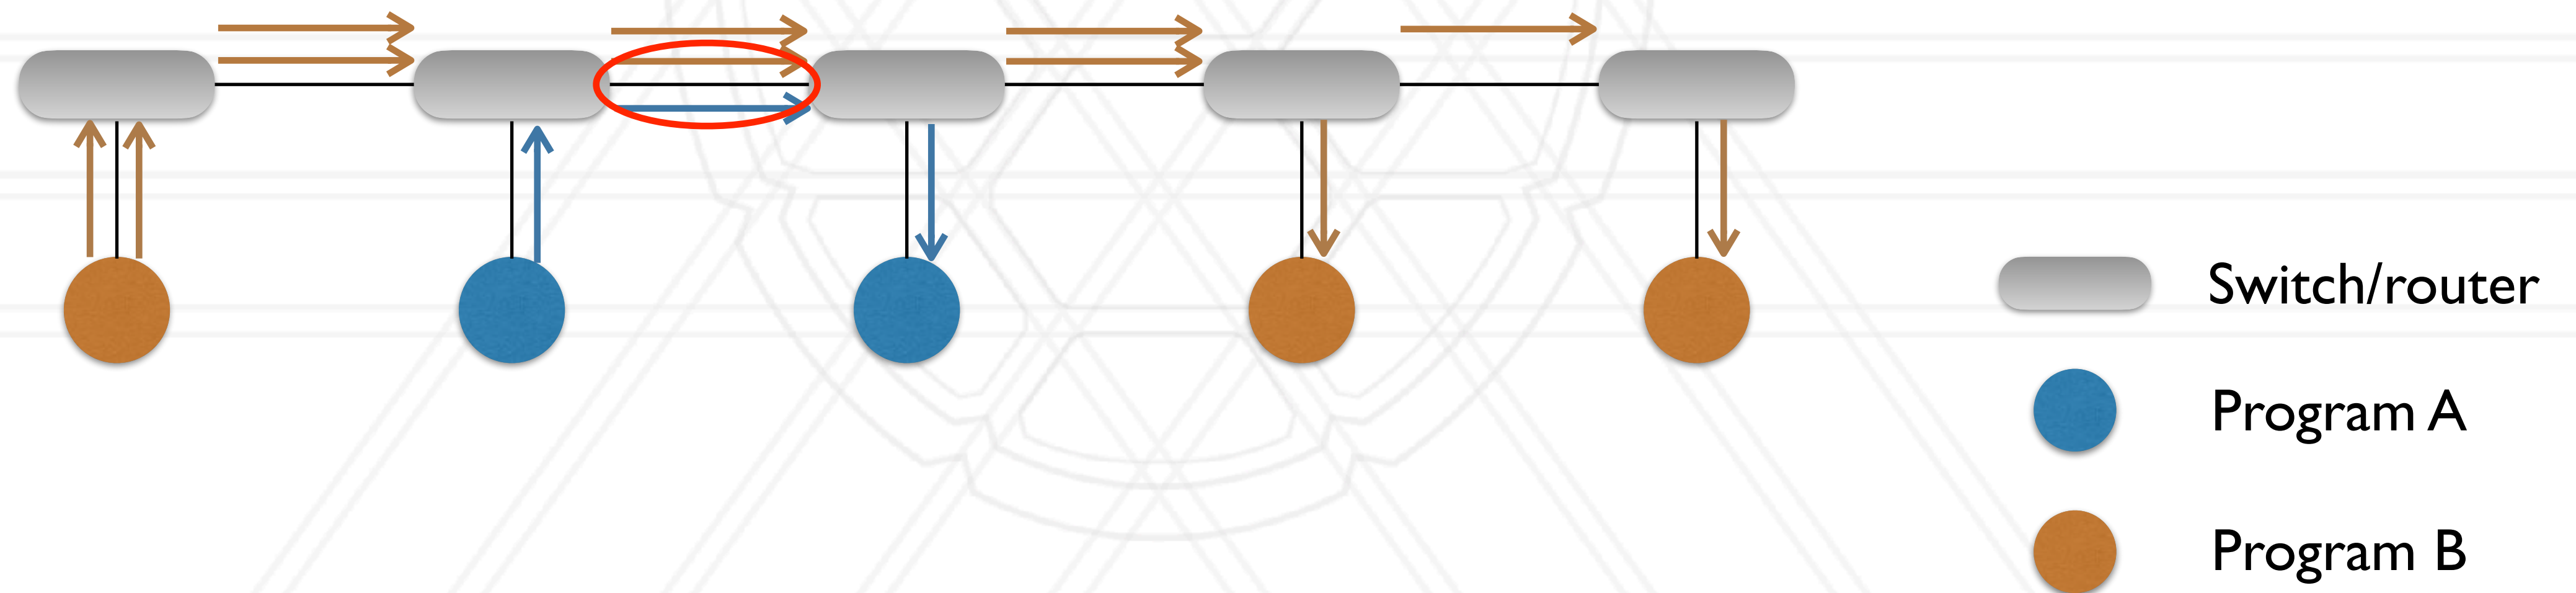


Routing algorithm

- Decides how a packet is routed between a source and destination switch
- Static routing: each router is pre-programmed with a routing table
 - Can change it at boot time
- Dynamic routing: routing can change at runtime
- Adaptive routing: adapts to network congestion

Performance variability


Performance of control jobs running the same executable and input varies as they are run from day-to-day on 128 nodes of Cori in 2018-2019

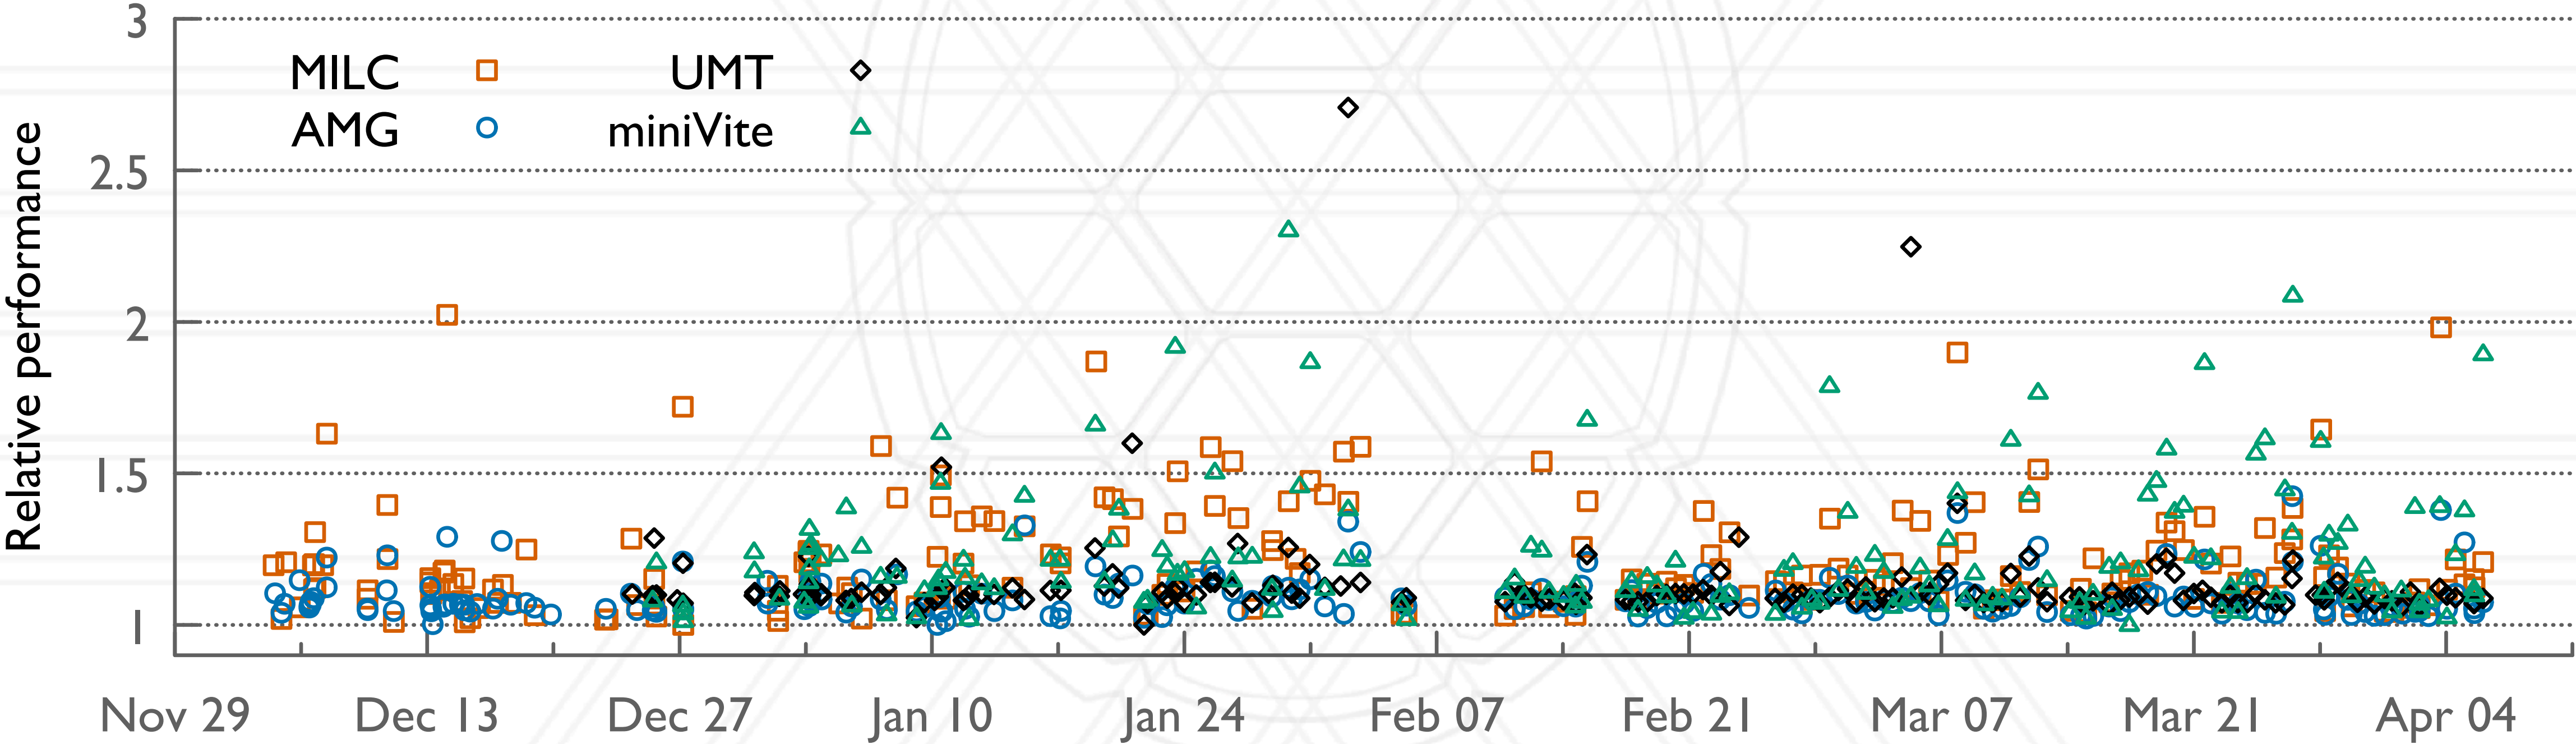

Bhatele et al. The case of performance variability on dragonfly-based systems, IPDPS 2020


Performance variability due to congestion

- No variability in computation time
- All of the variability can be attributed to communication performance
- Factors:
 - Placement of jobs
 - Contention for network resources

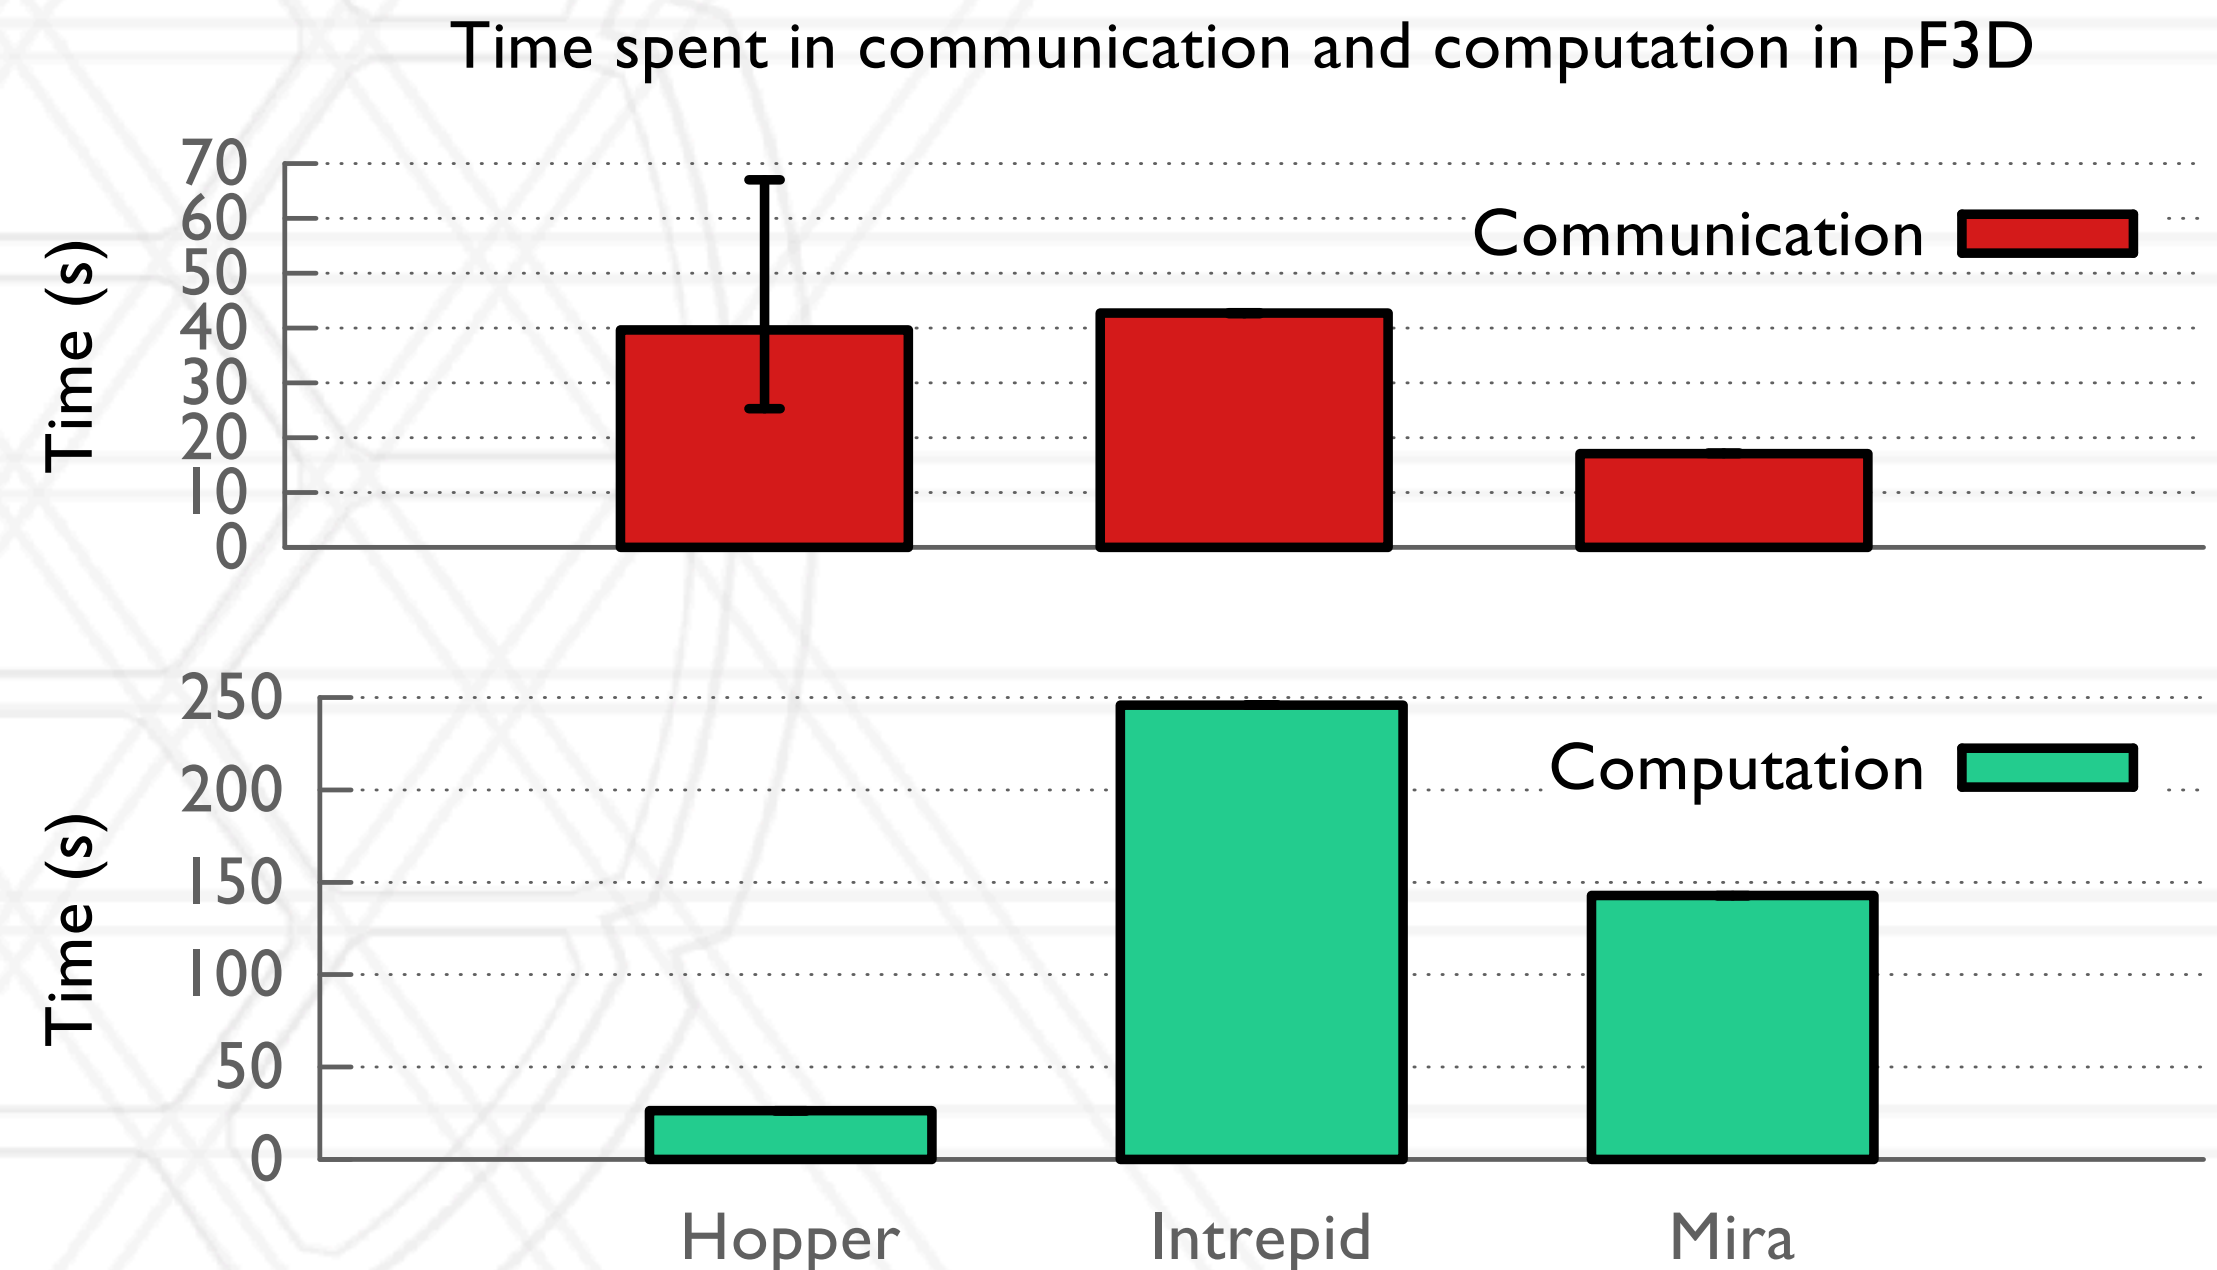


Bhatele et al. <http://www.cs.umd.edu/~bhatele/pubs/pdf/2013/sc2013a.pdf>

Impact of other jobs

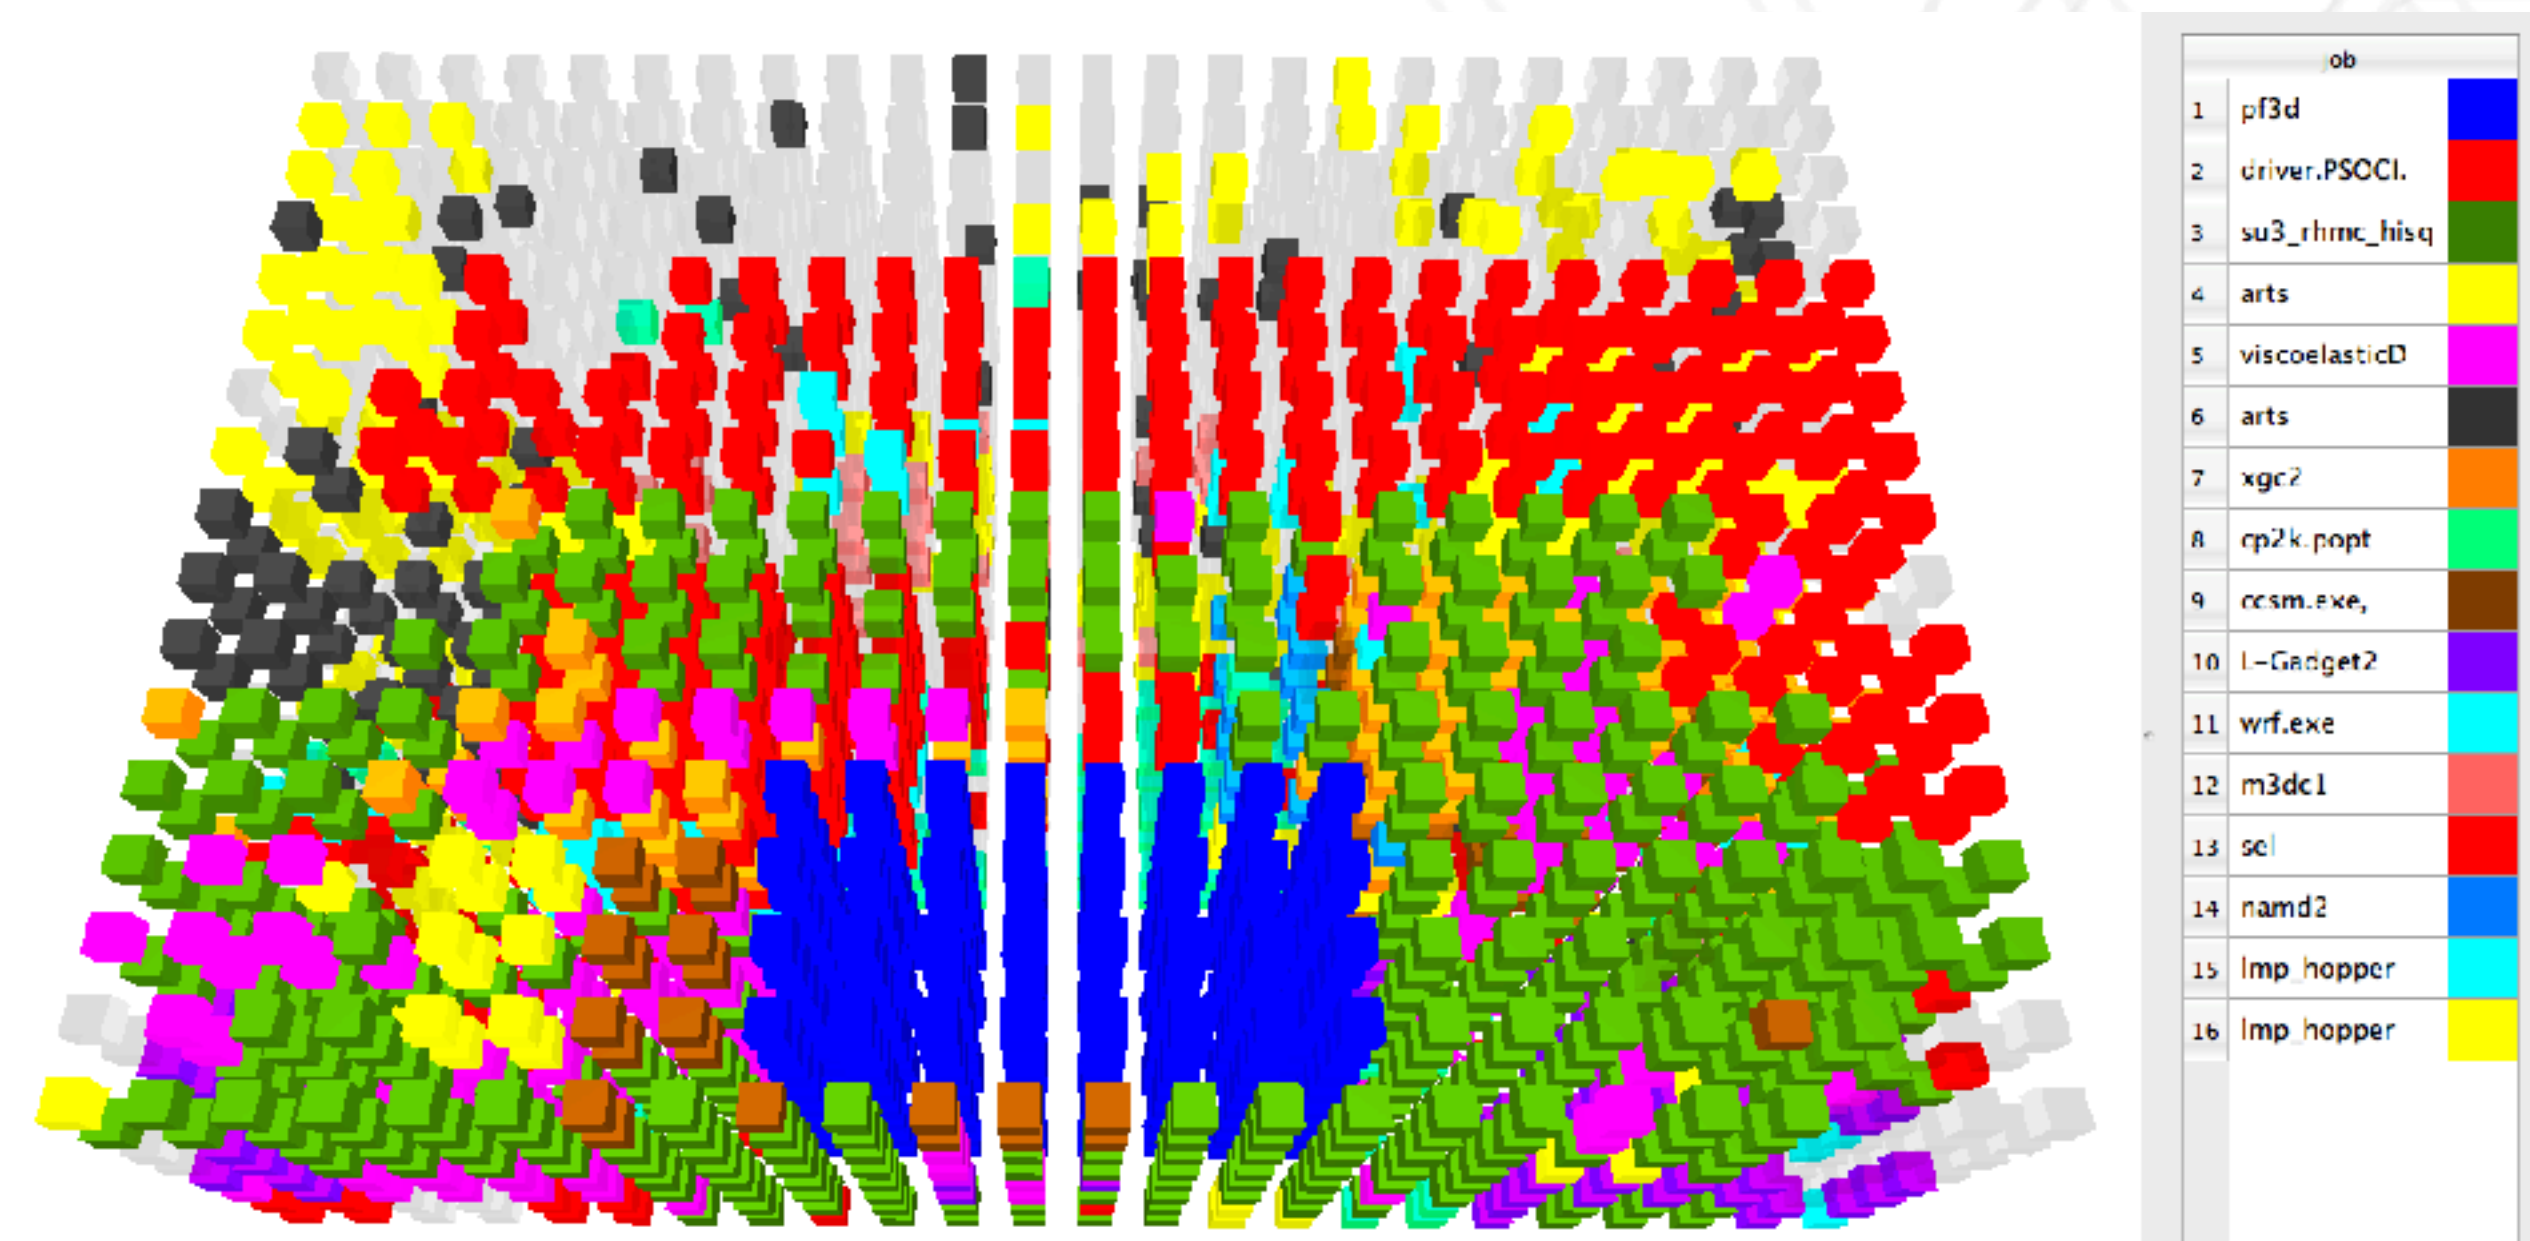


April 11

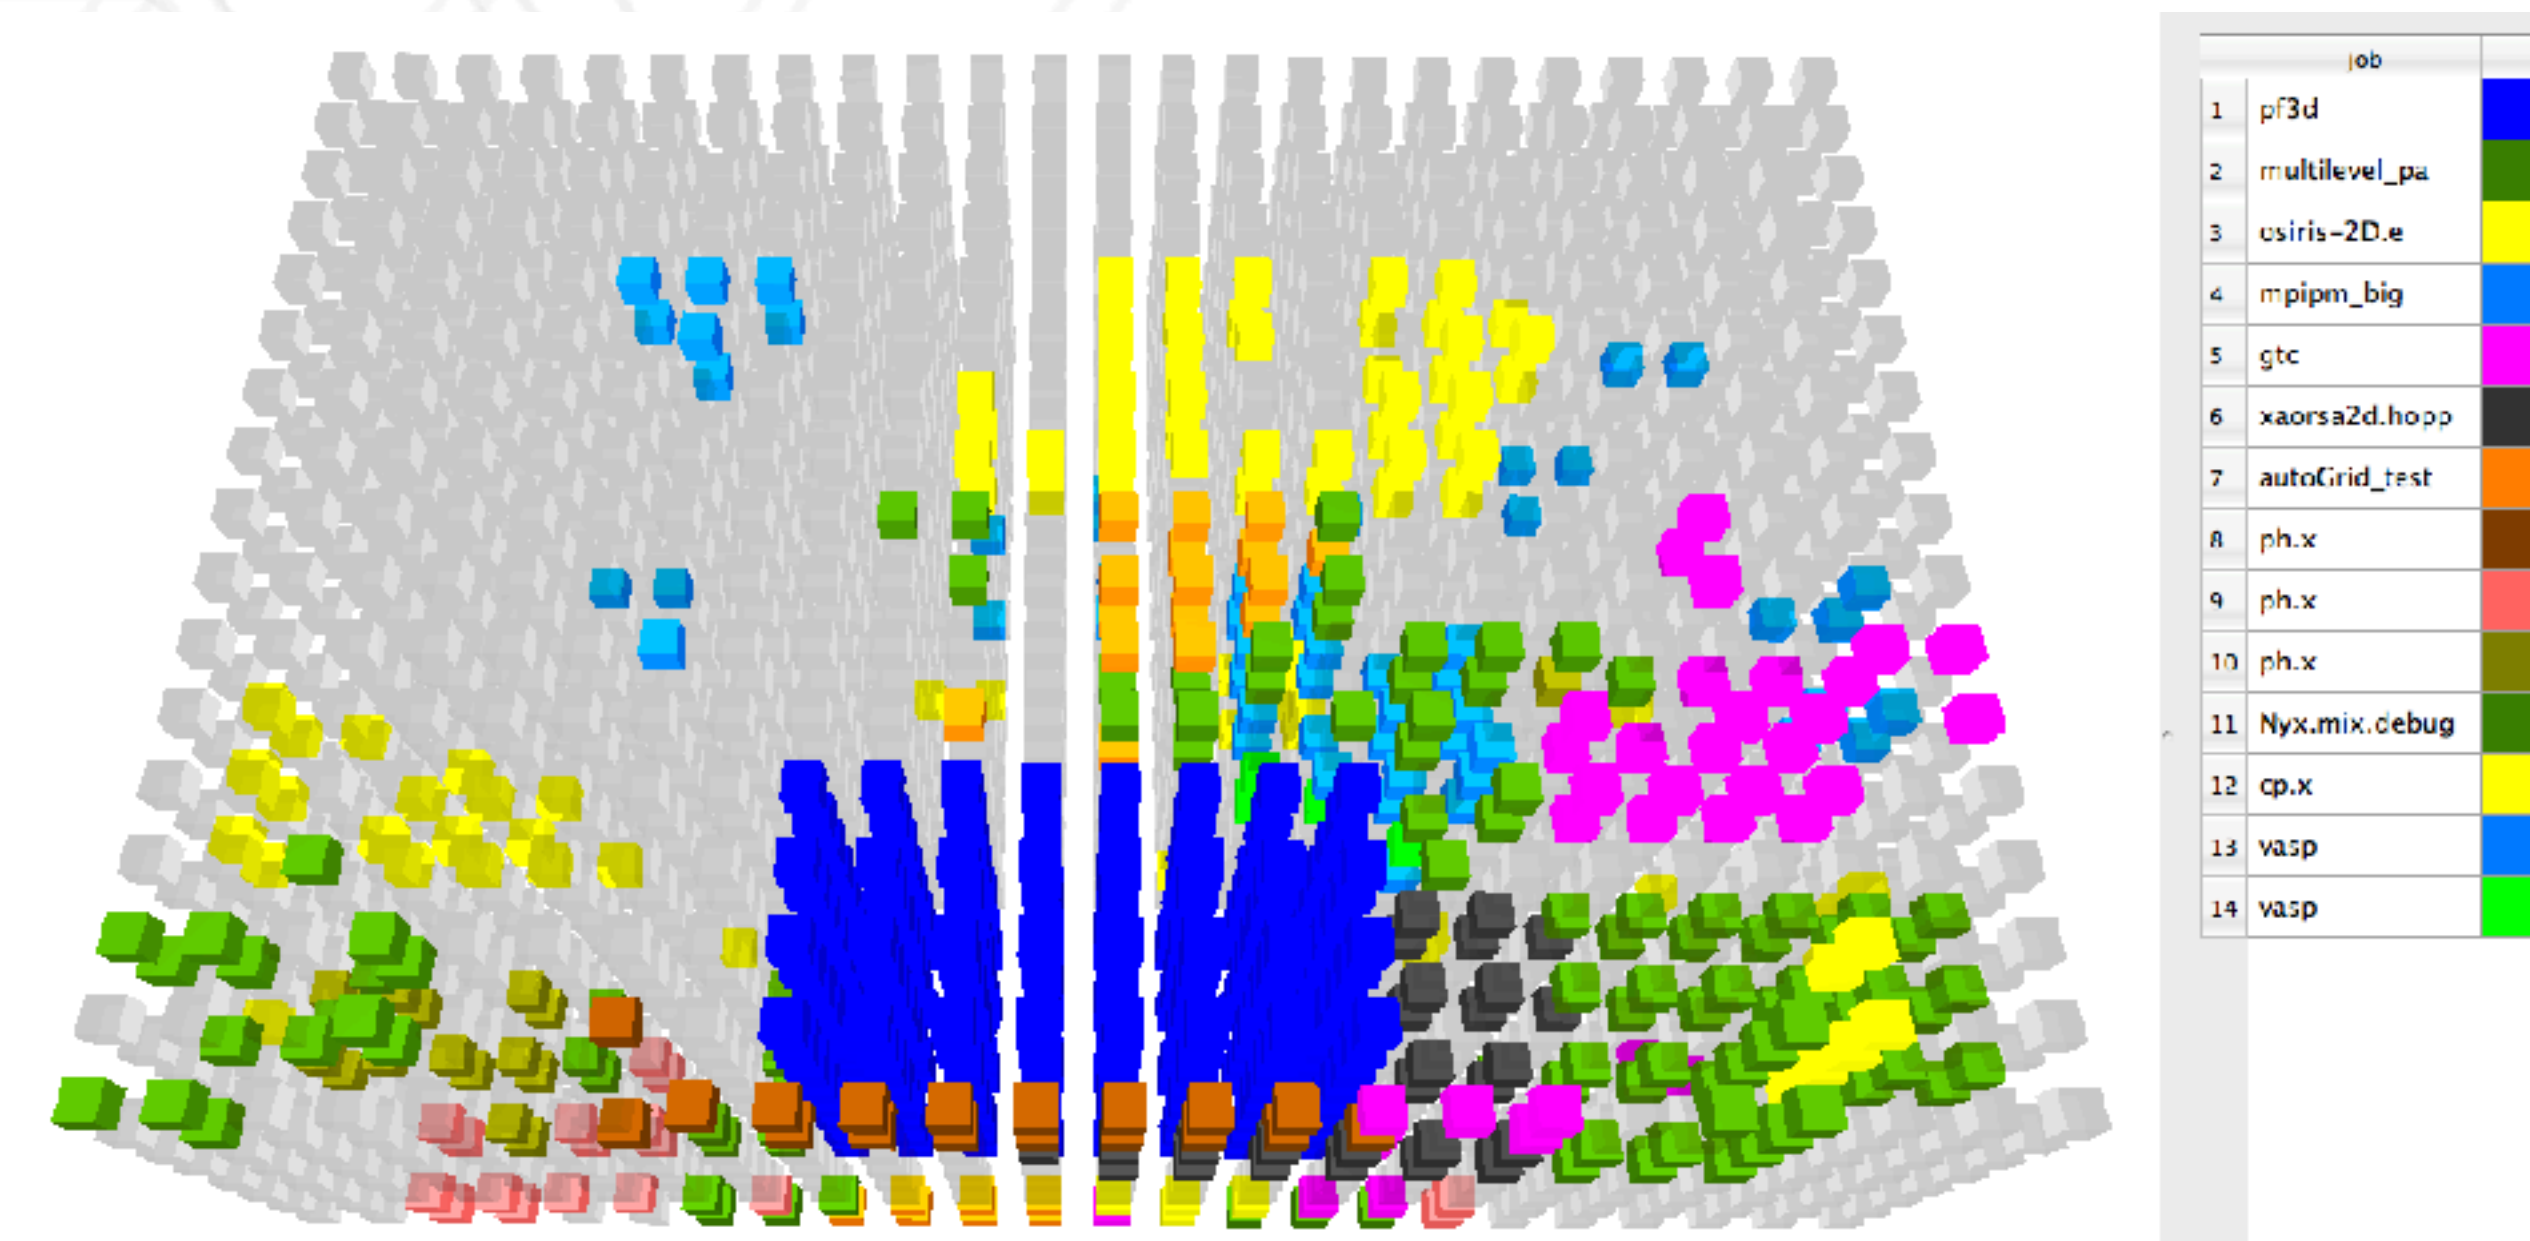


April 16

Impact of other jobs

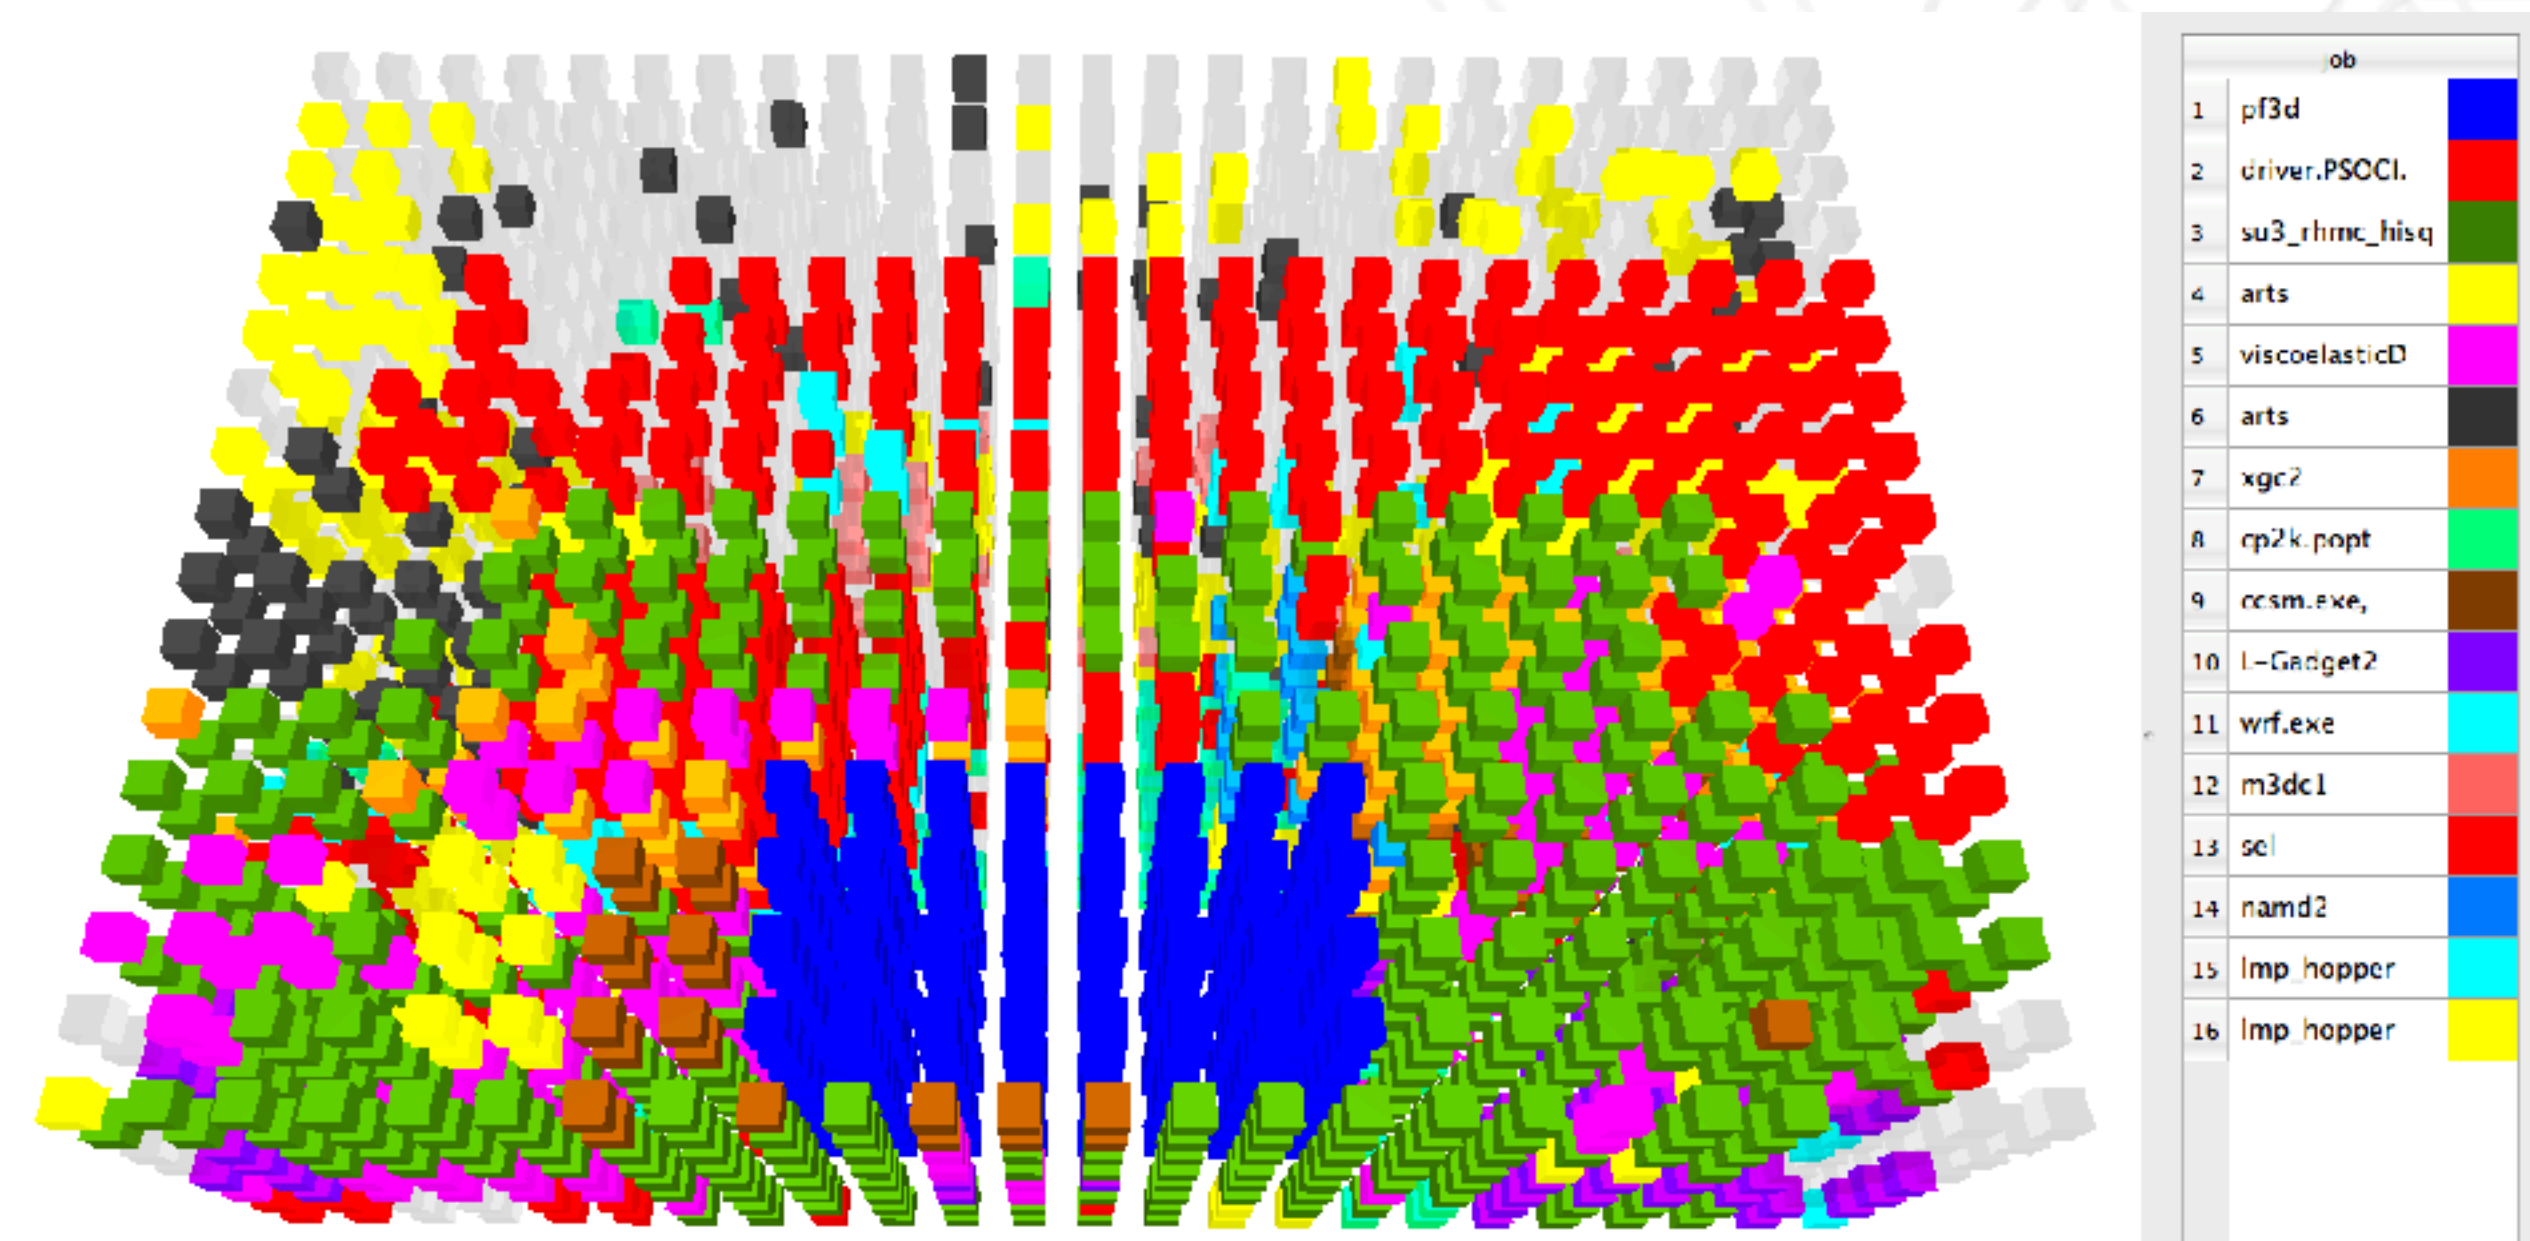

April 11
MILC job in green

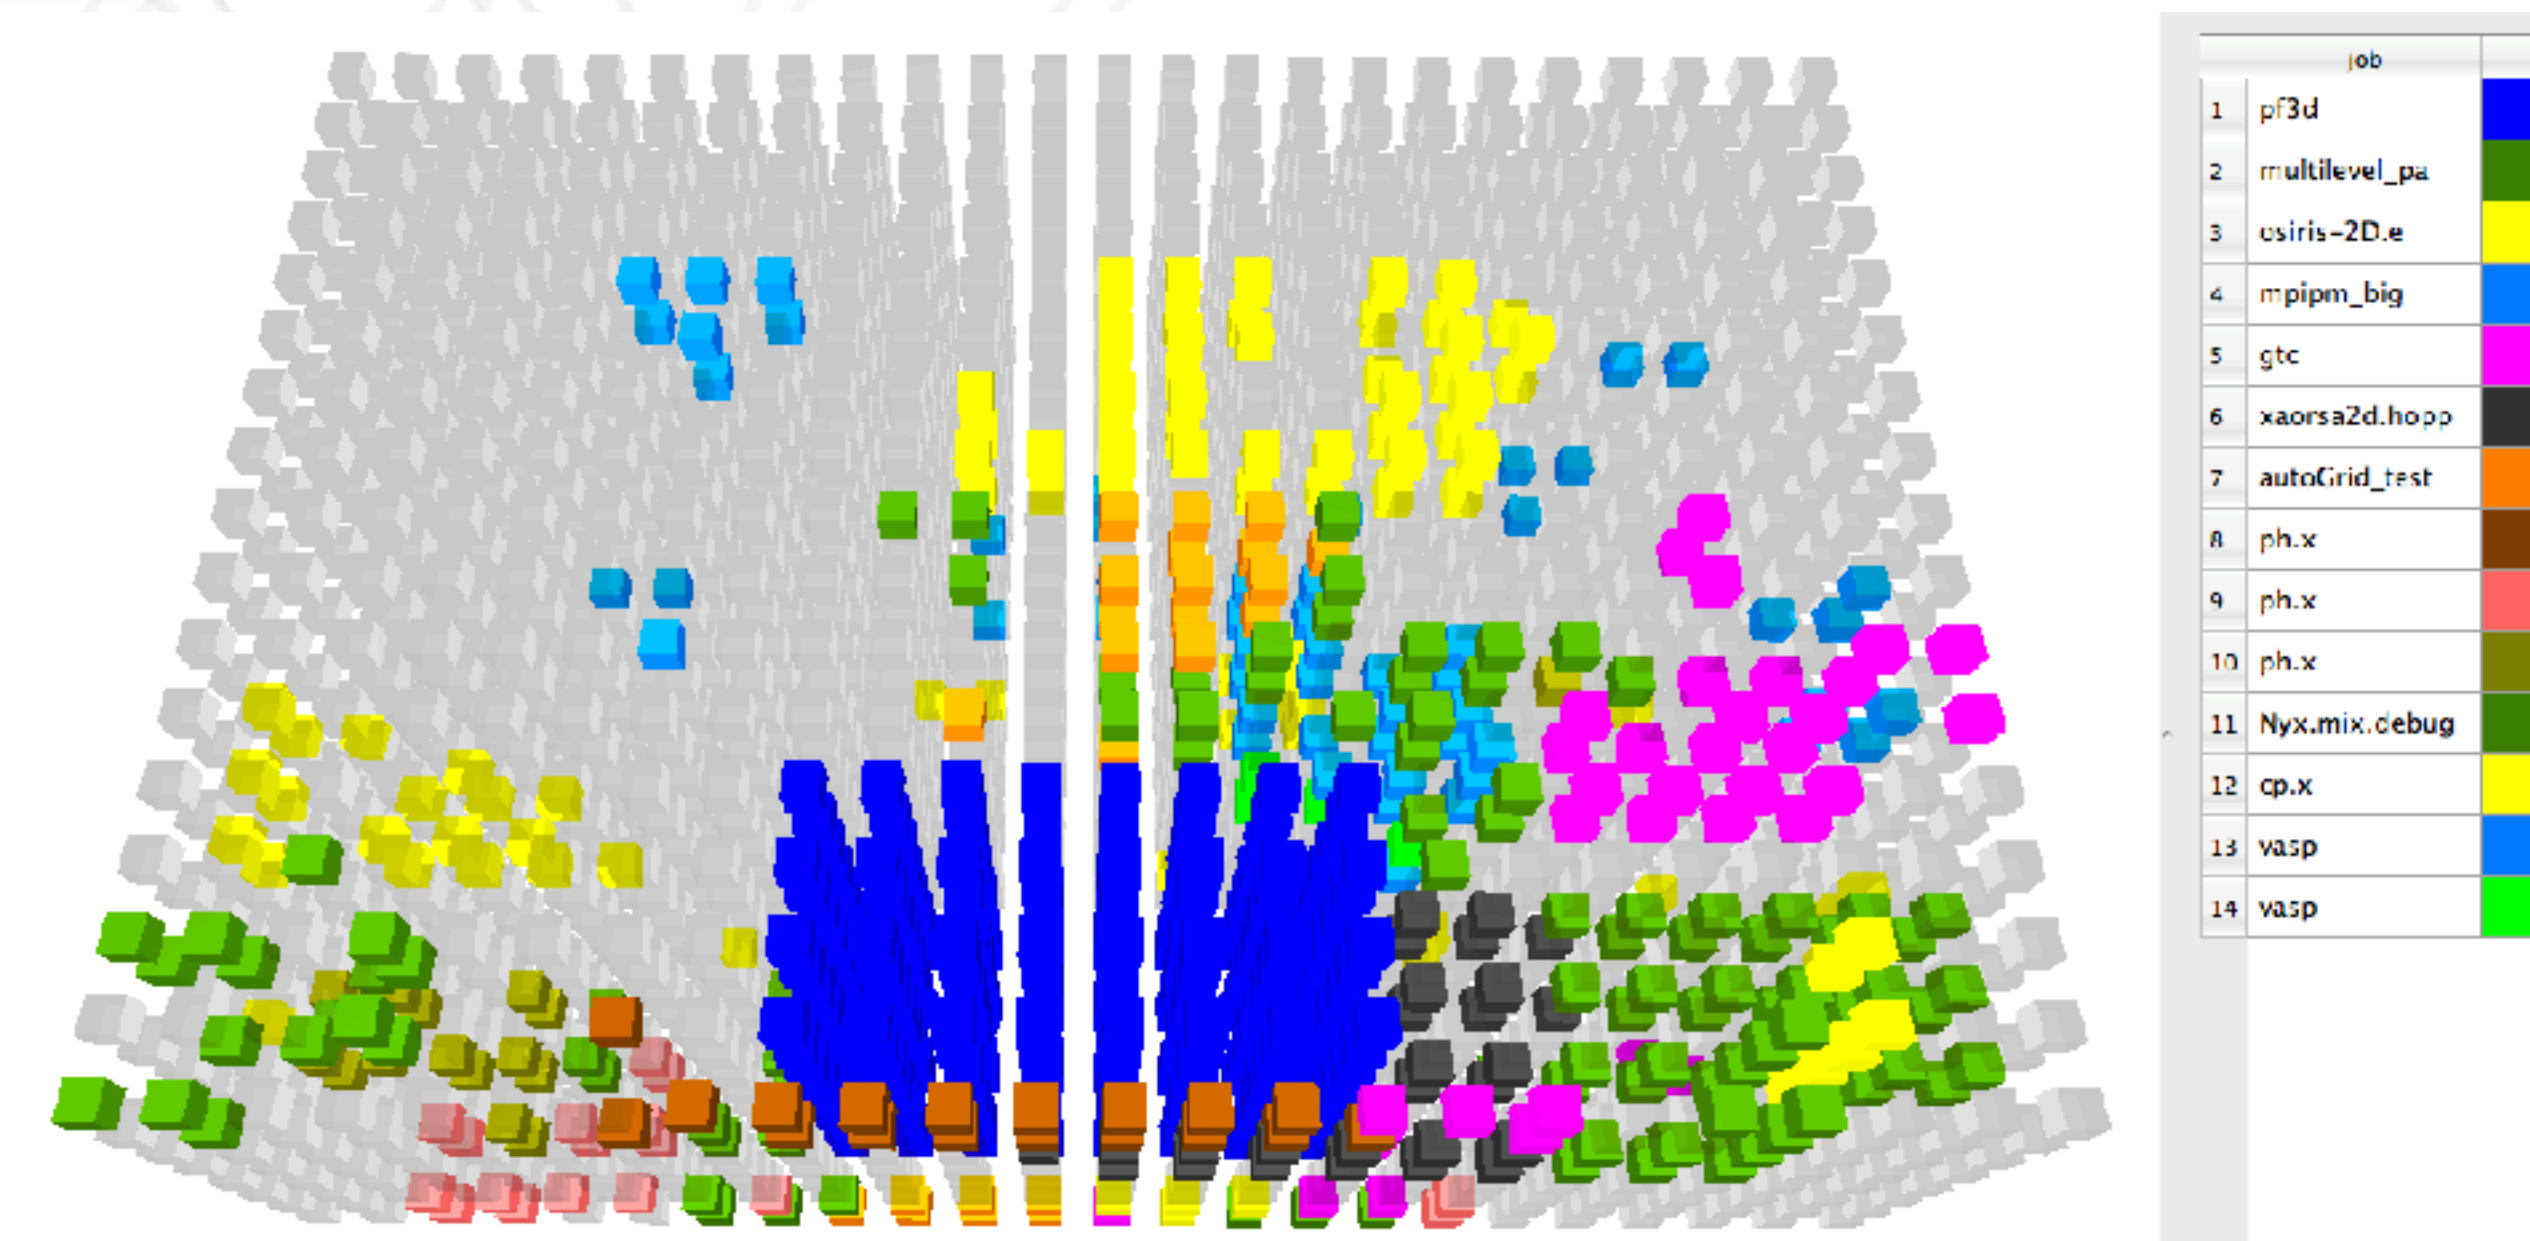


April 16
25% higher messaging rate


Different approaches to mitigating congestion

- Network topology aware node allocation
- Congestion or network flow aware adaptive routing
- Within a job: network topology aware mapping of processes or chares to allocated nodes


topology-aware node allocation

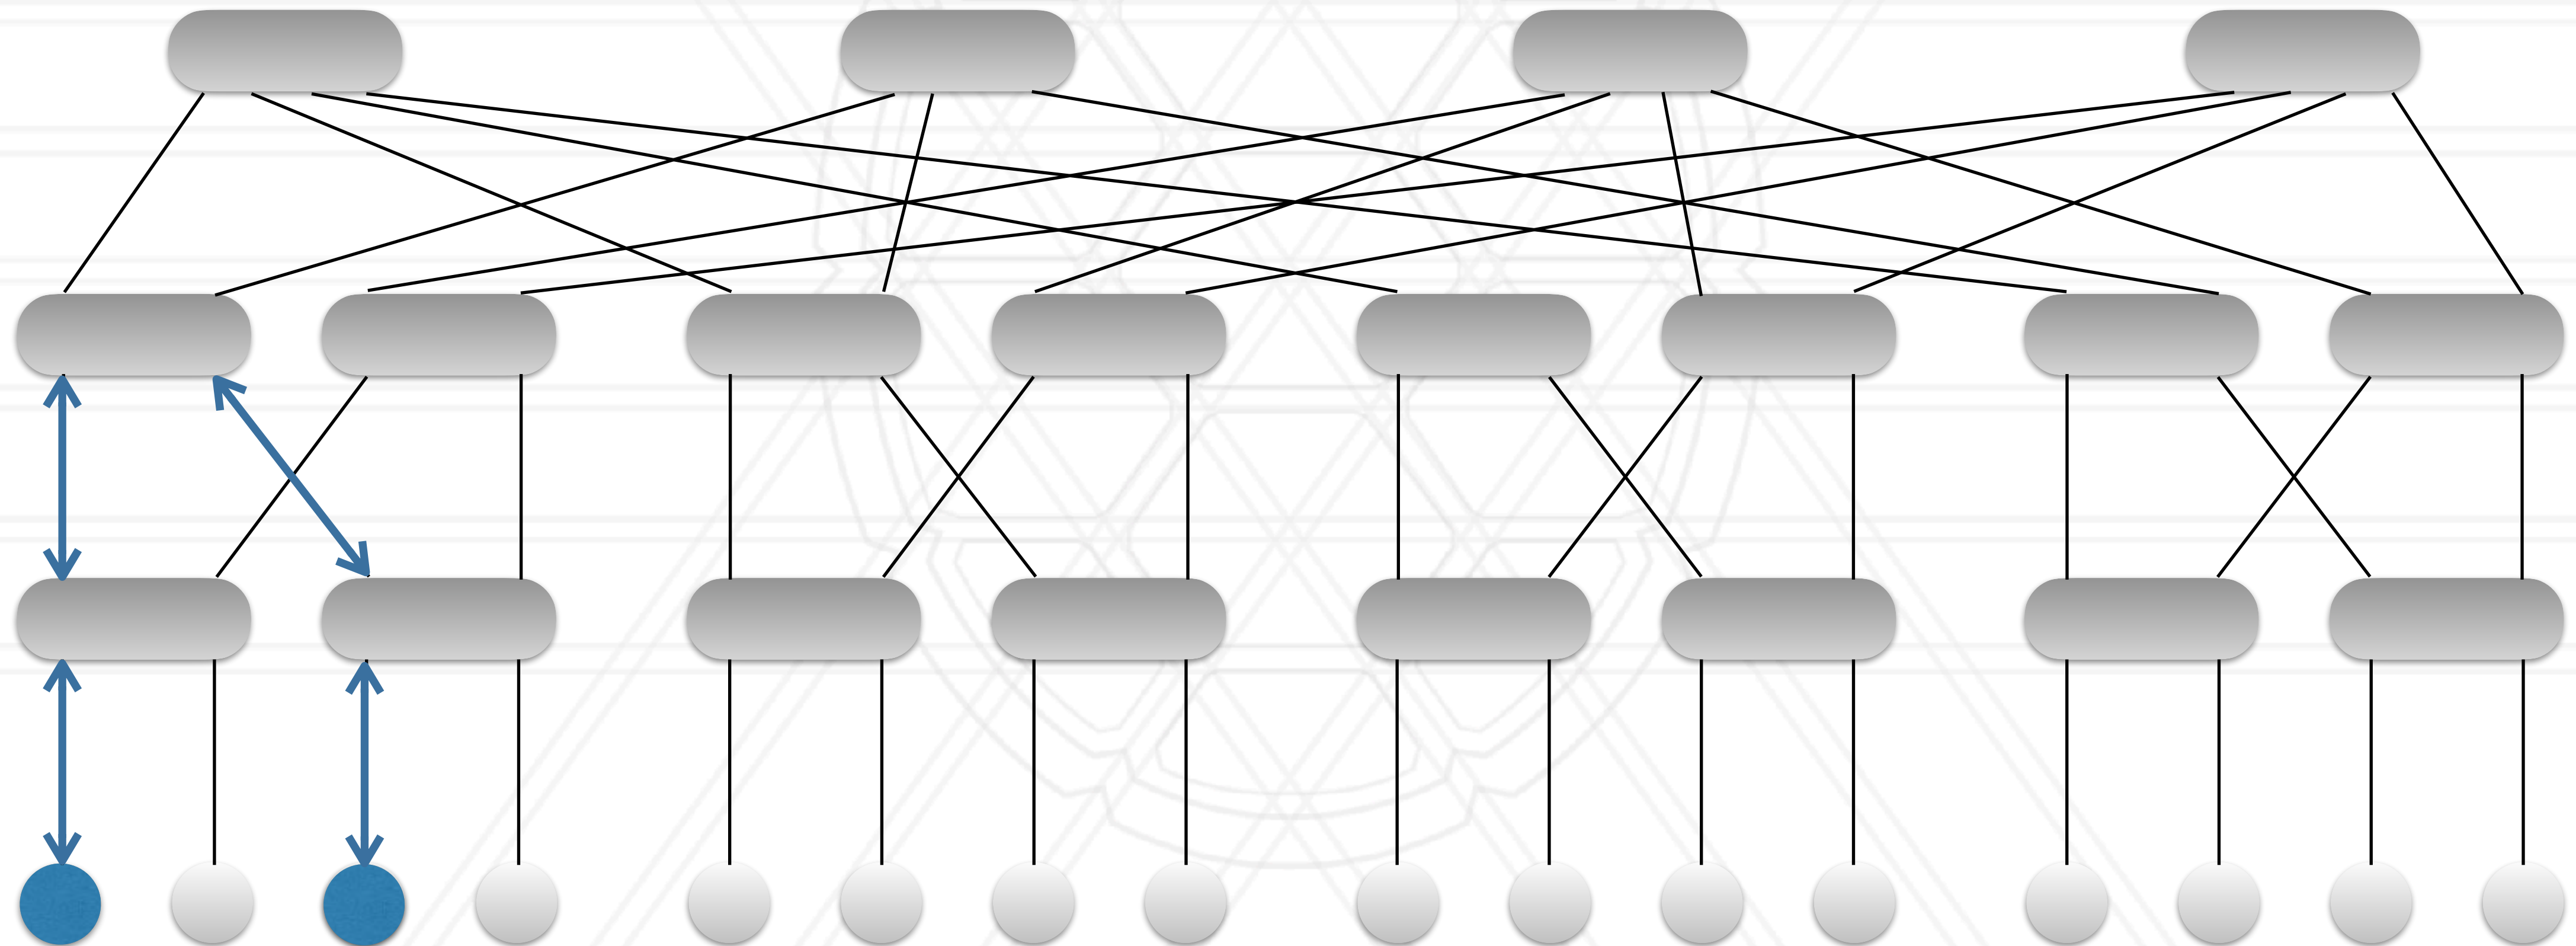


topology-aware node allocation

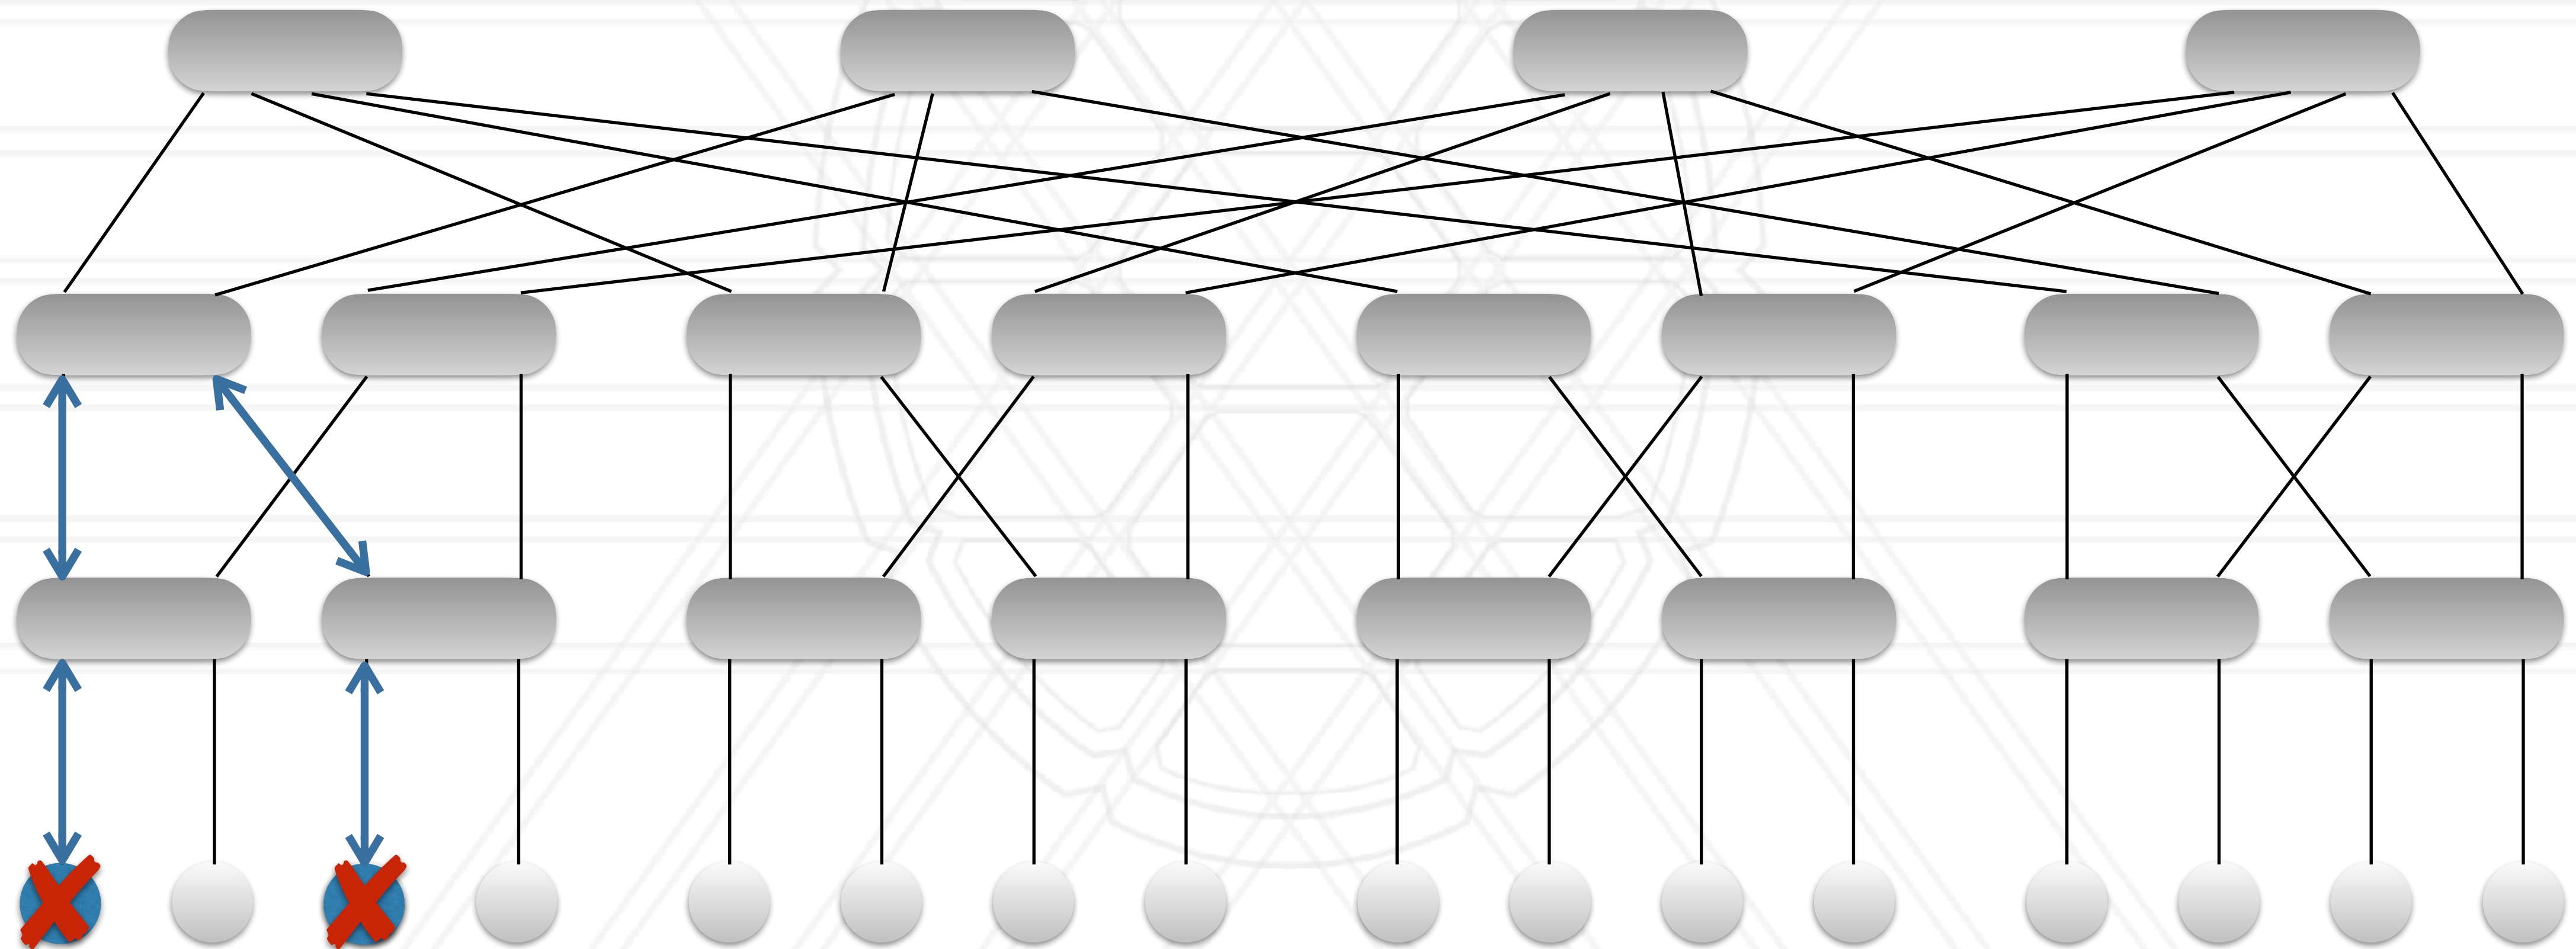


topology-aware node allocation

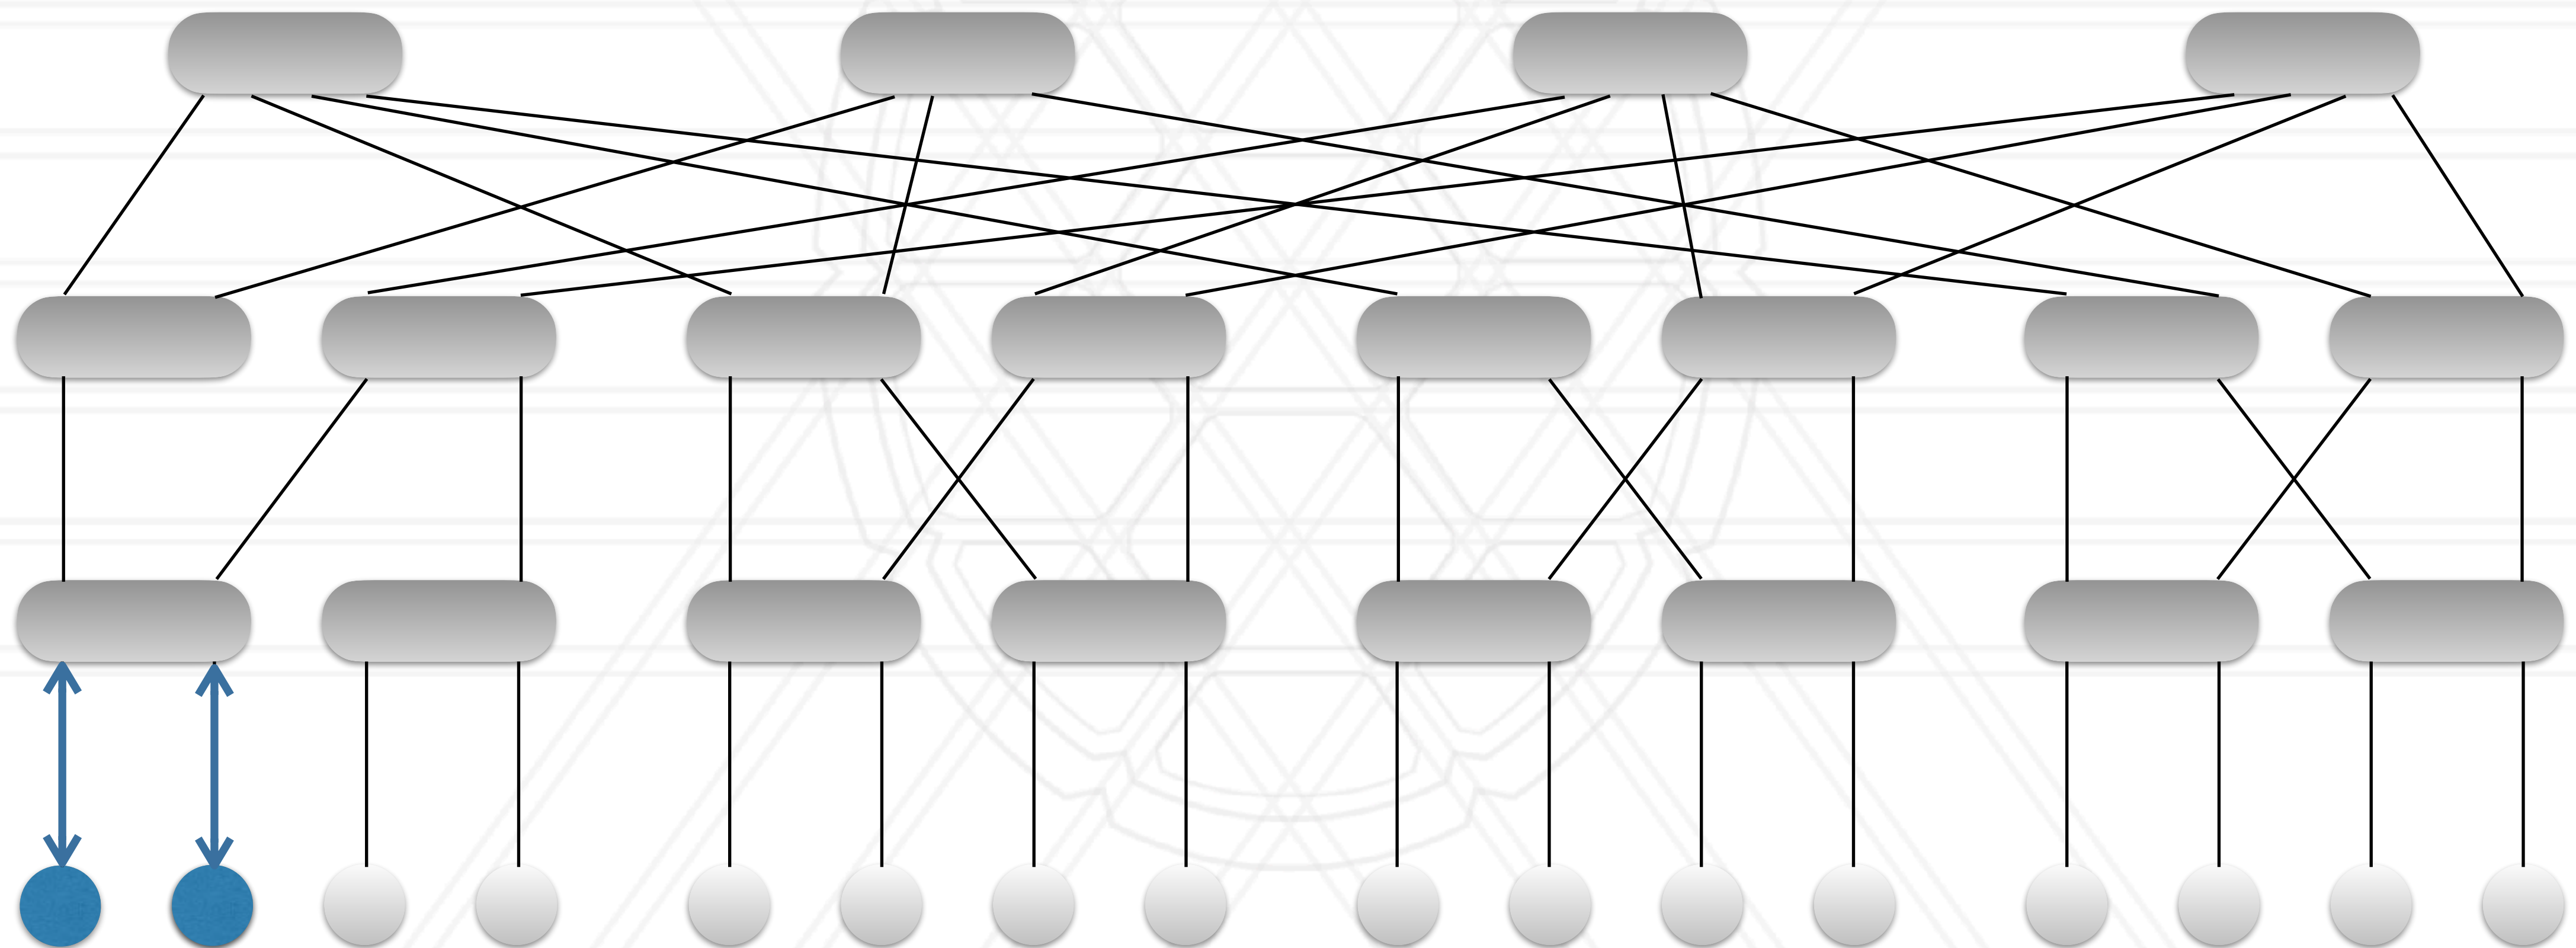


topology-aware node allocation

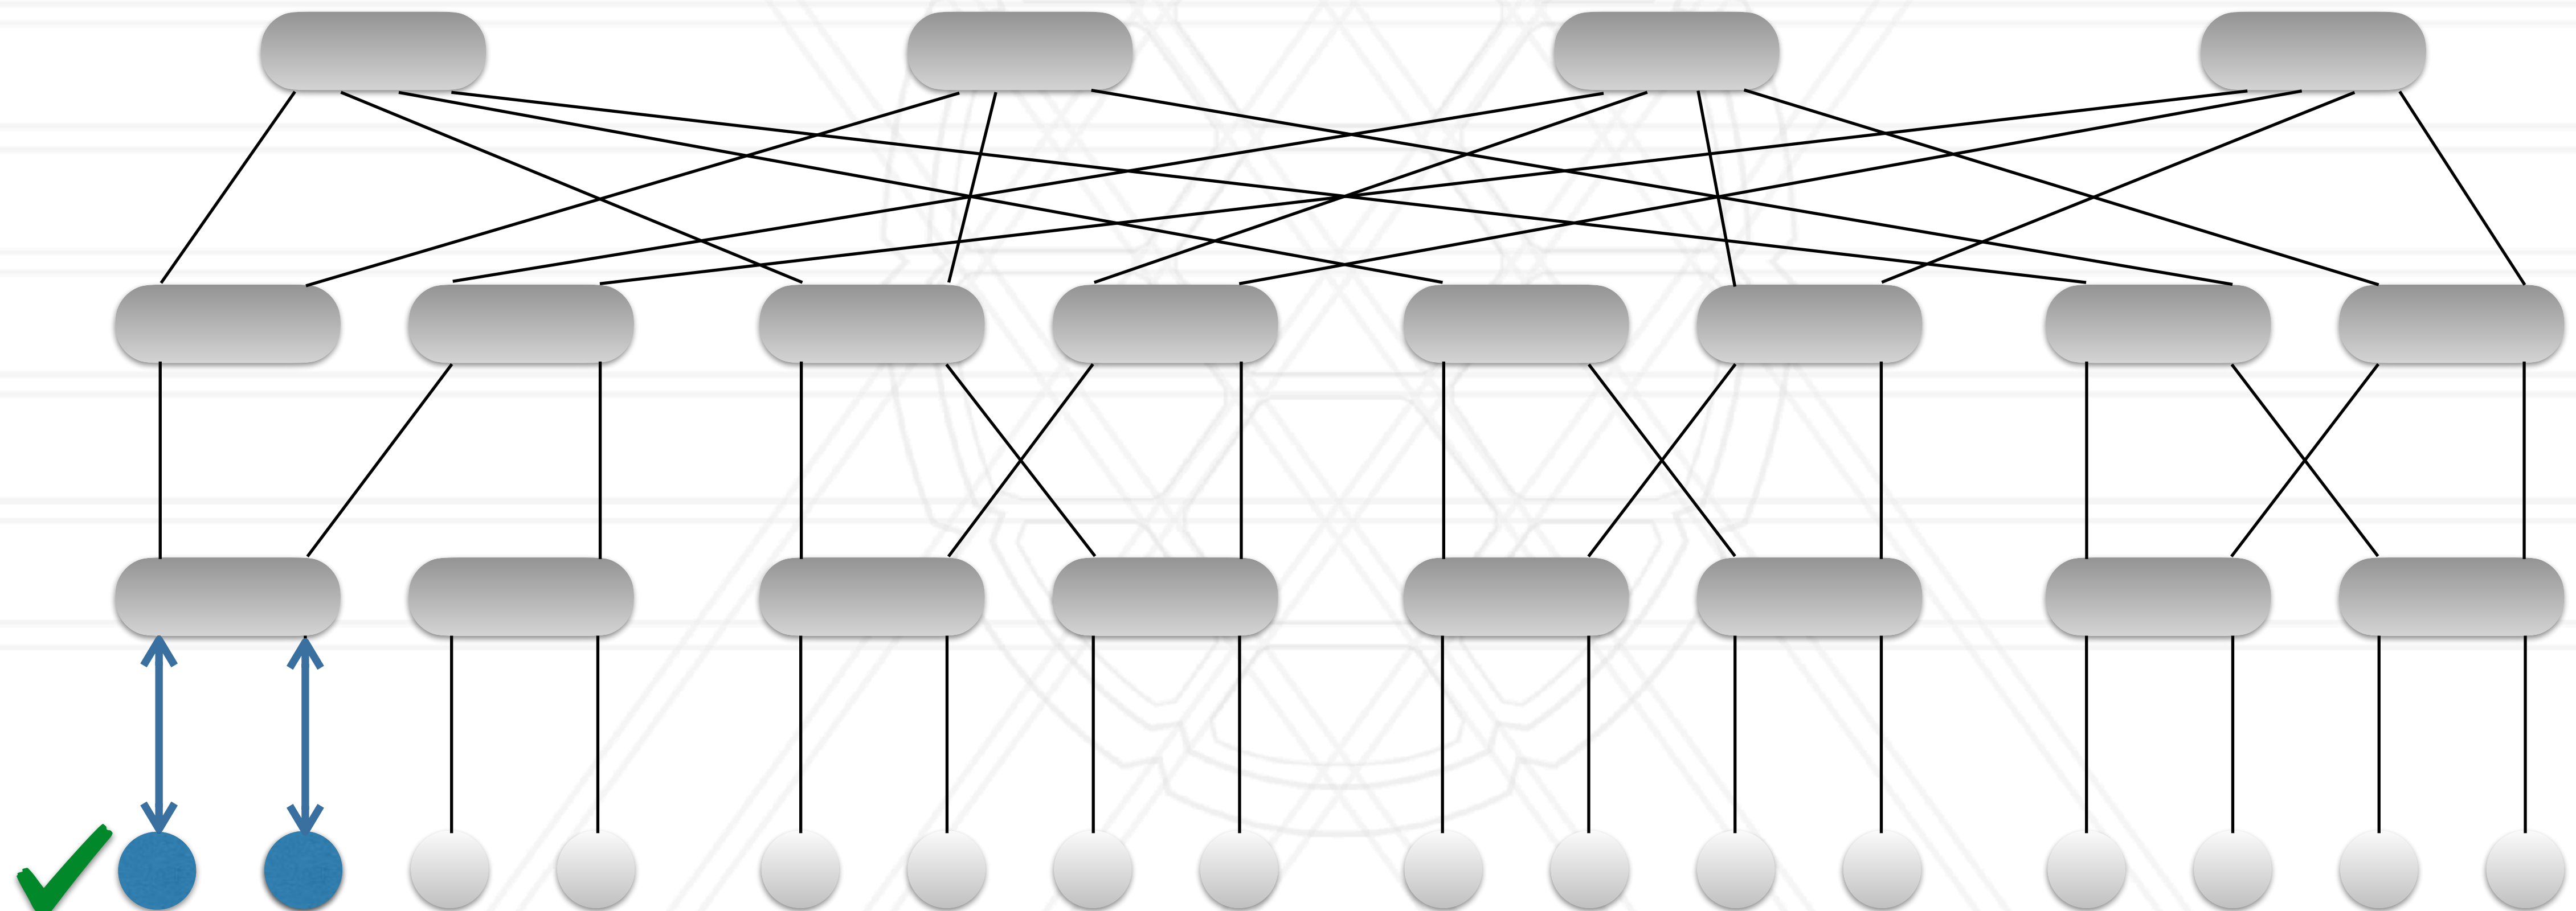


topology-aware node allocation

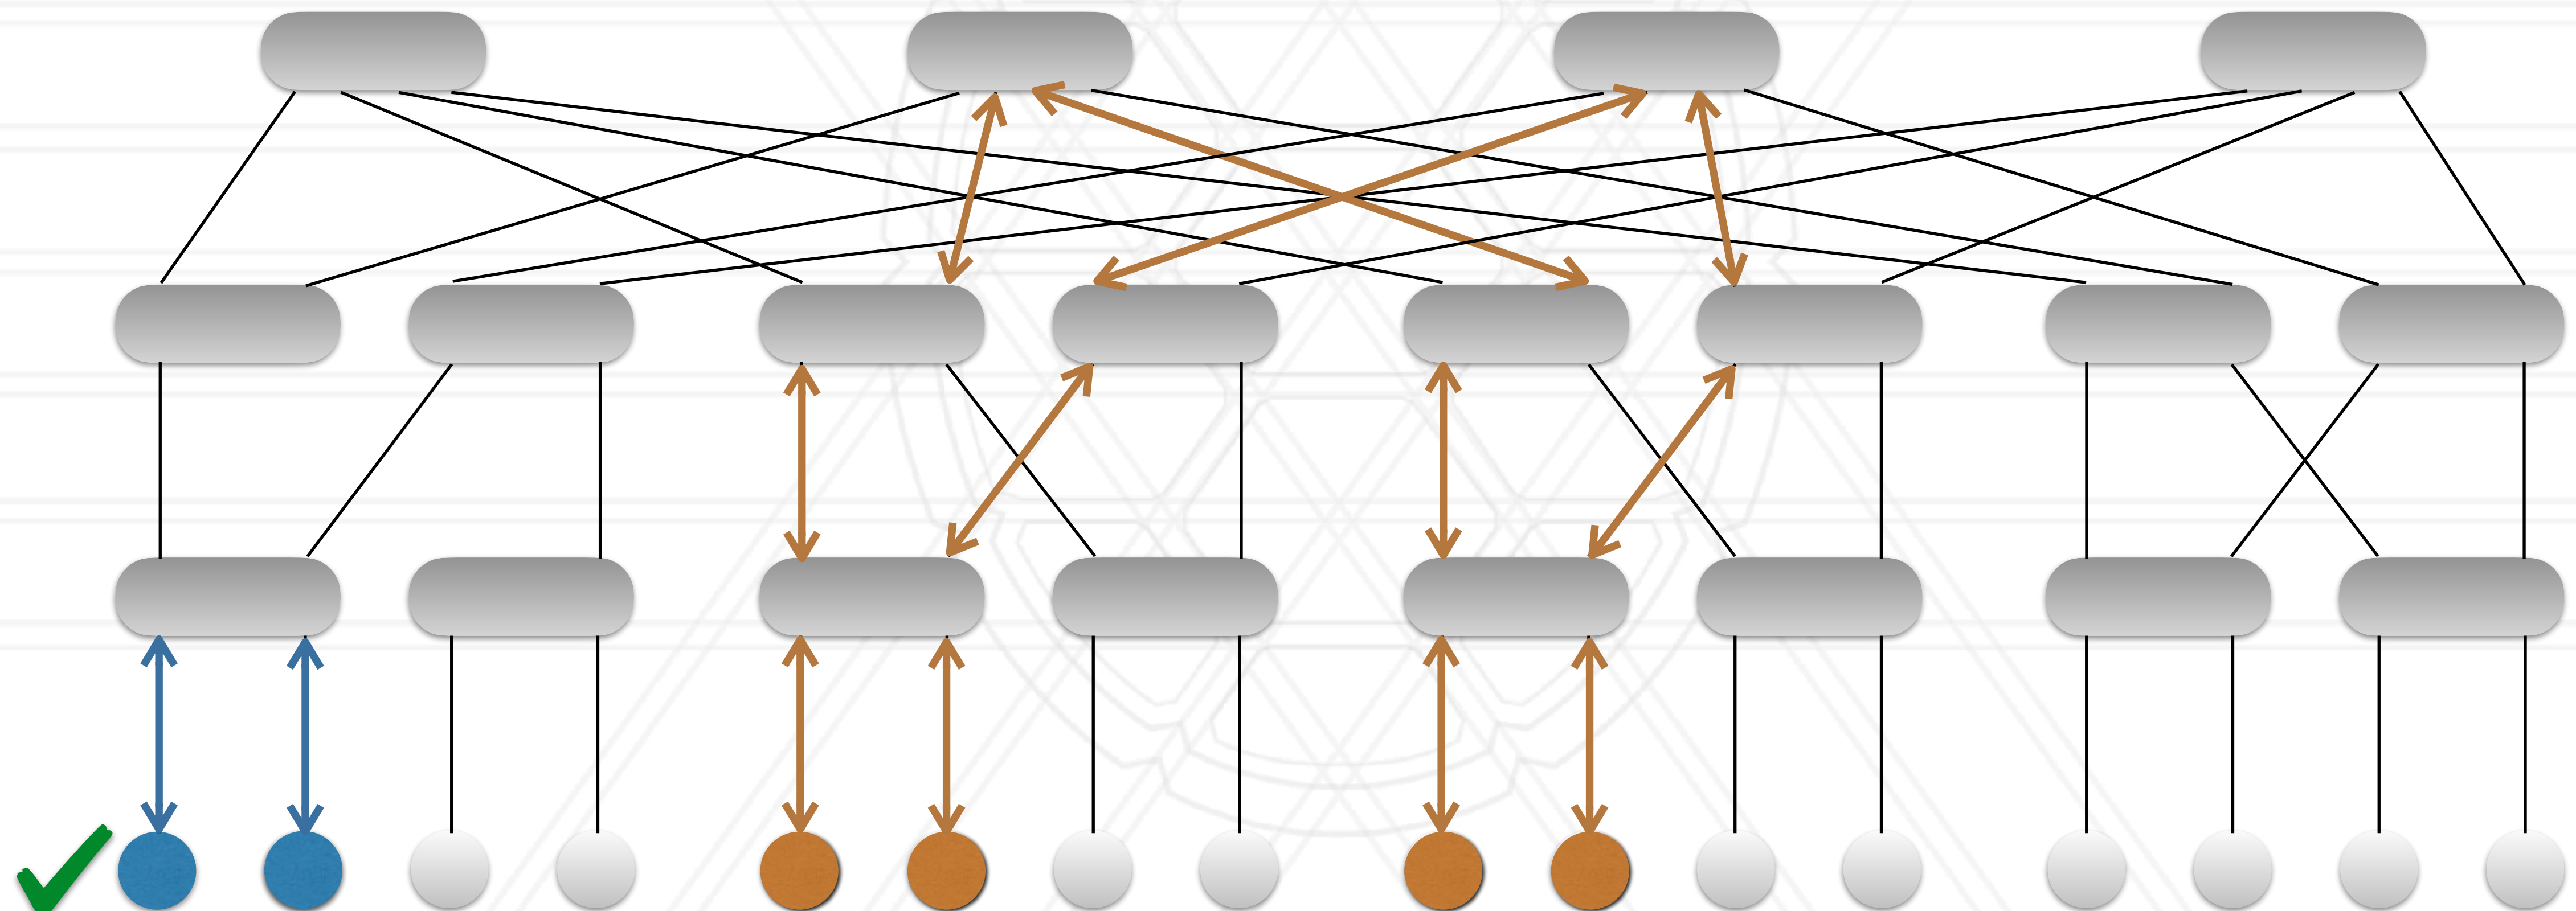


topology-aware node allocation

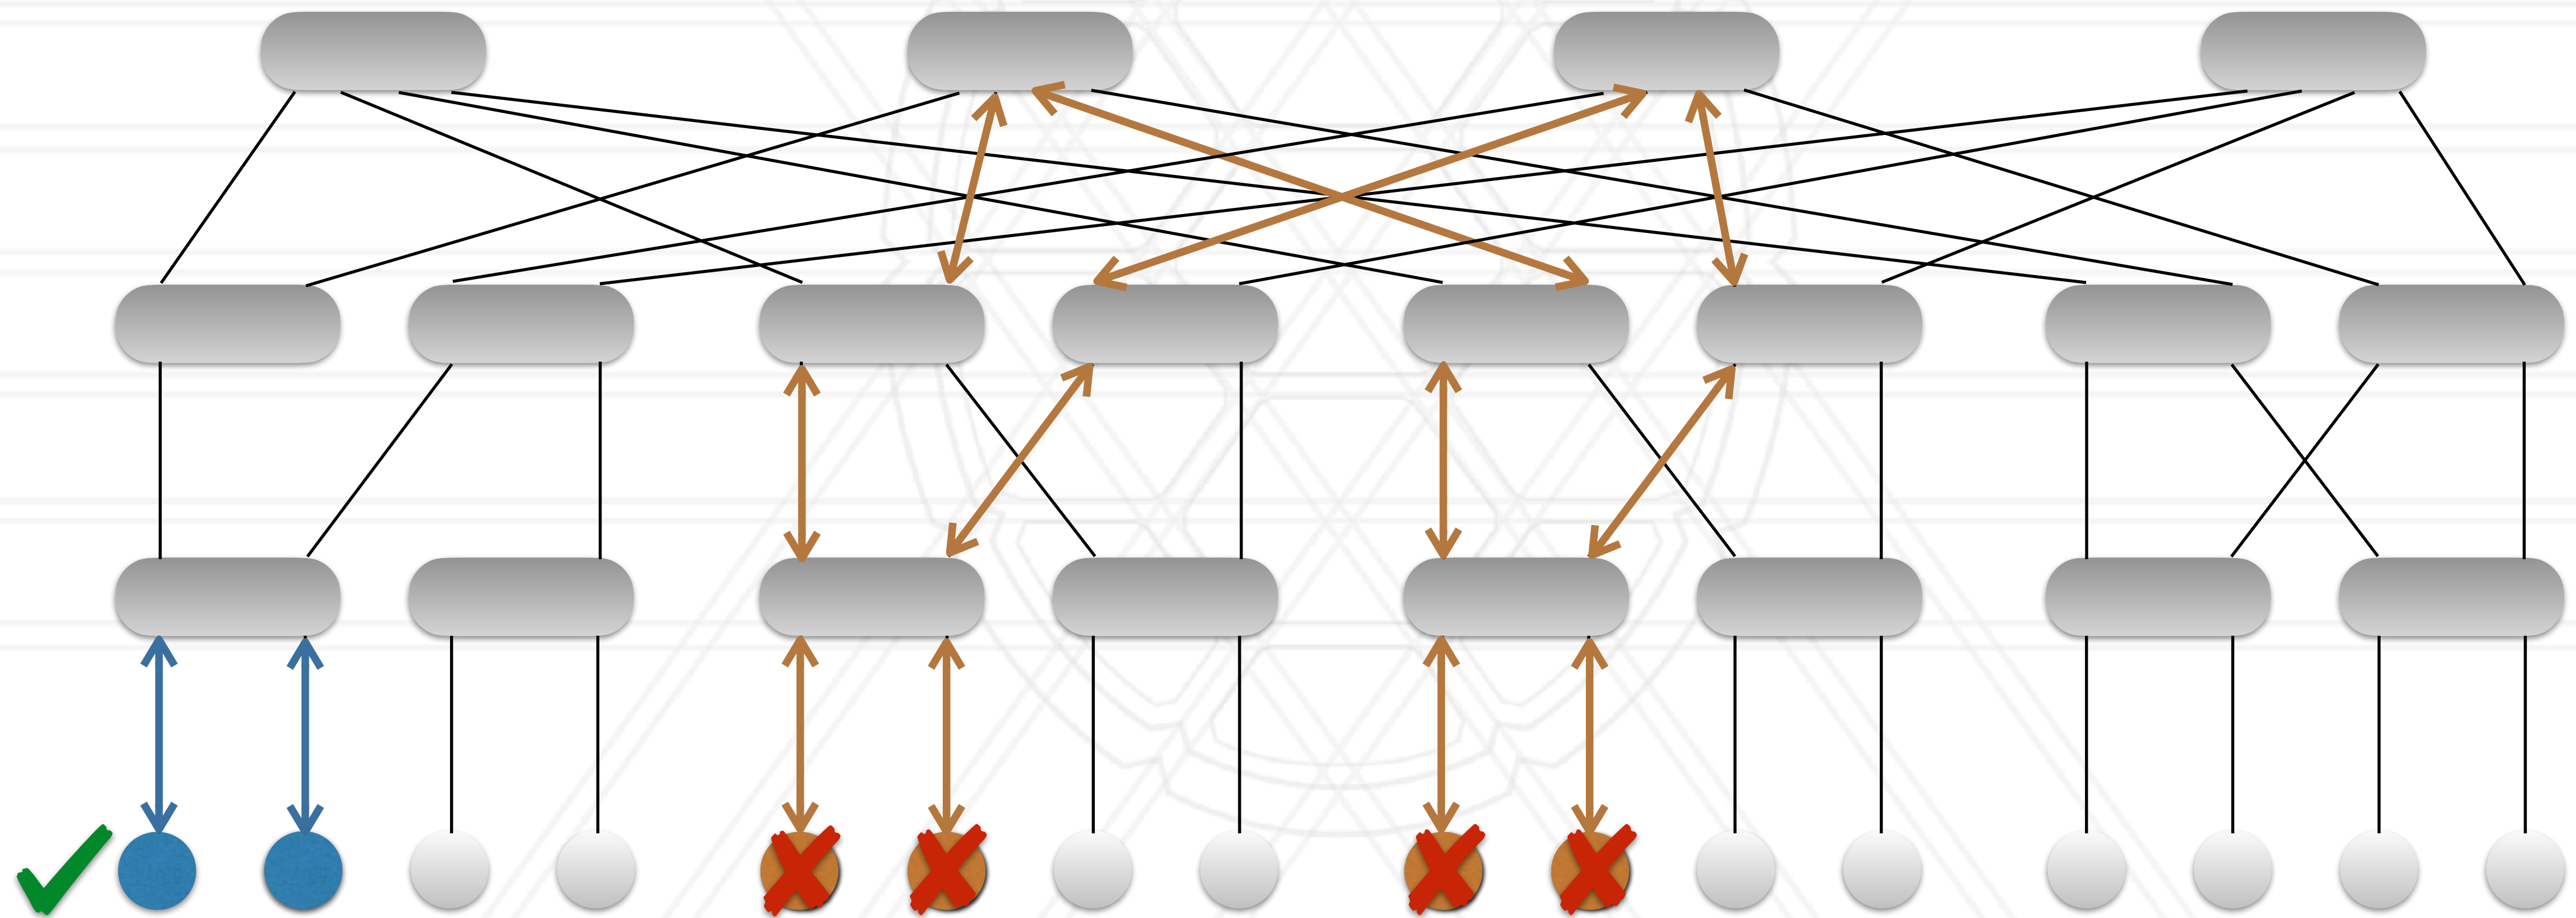

topology-aware node allocation

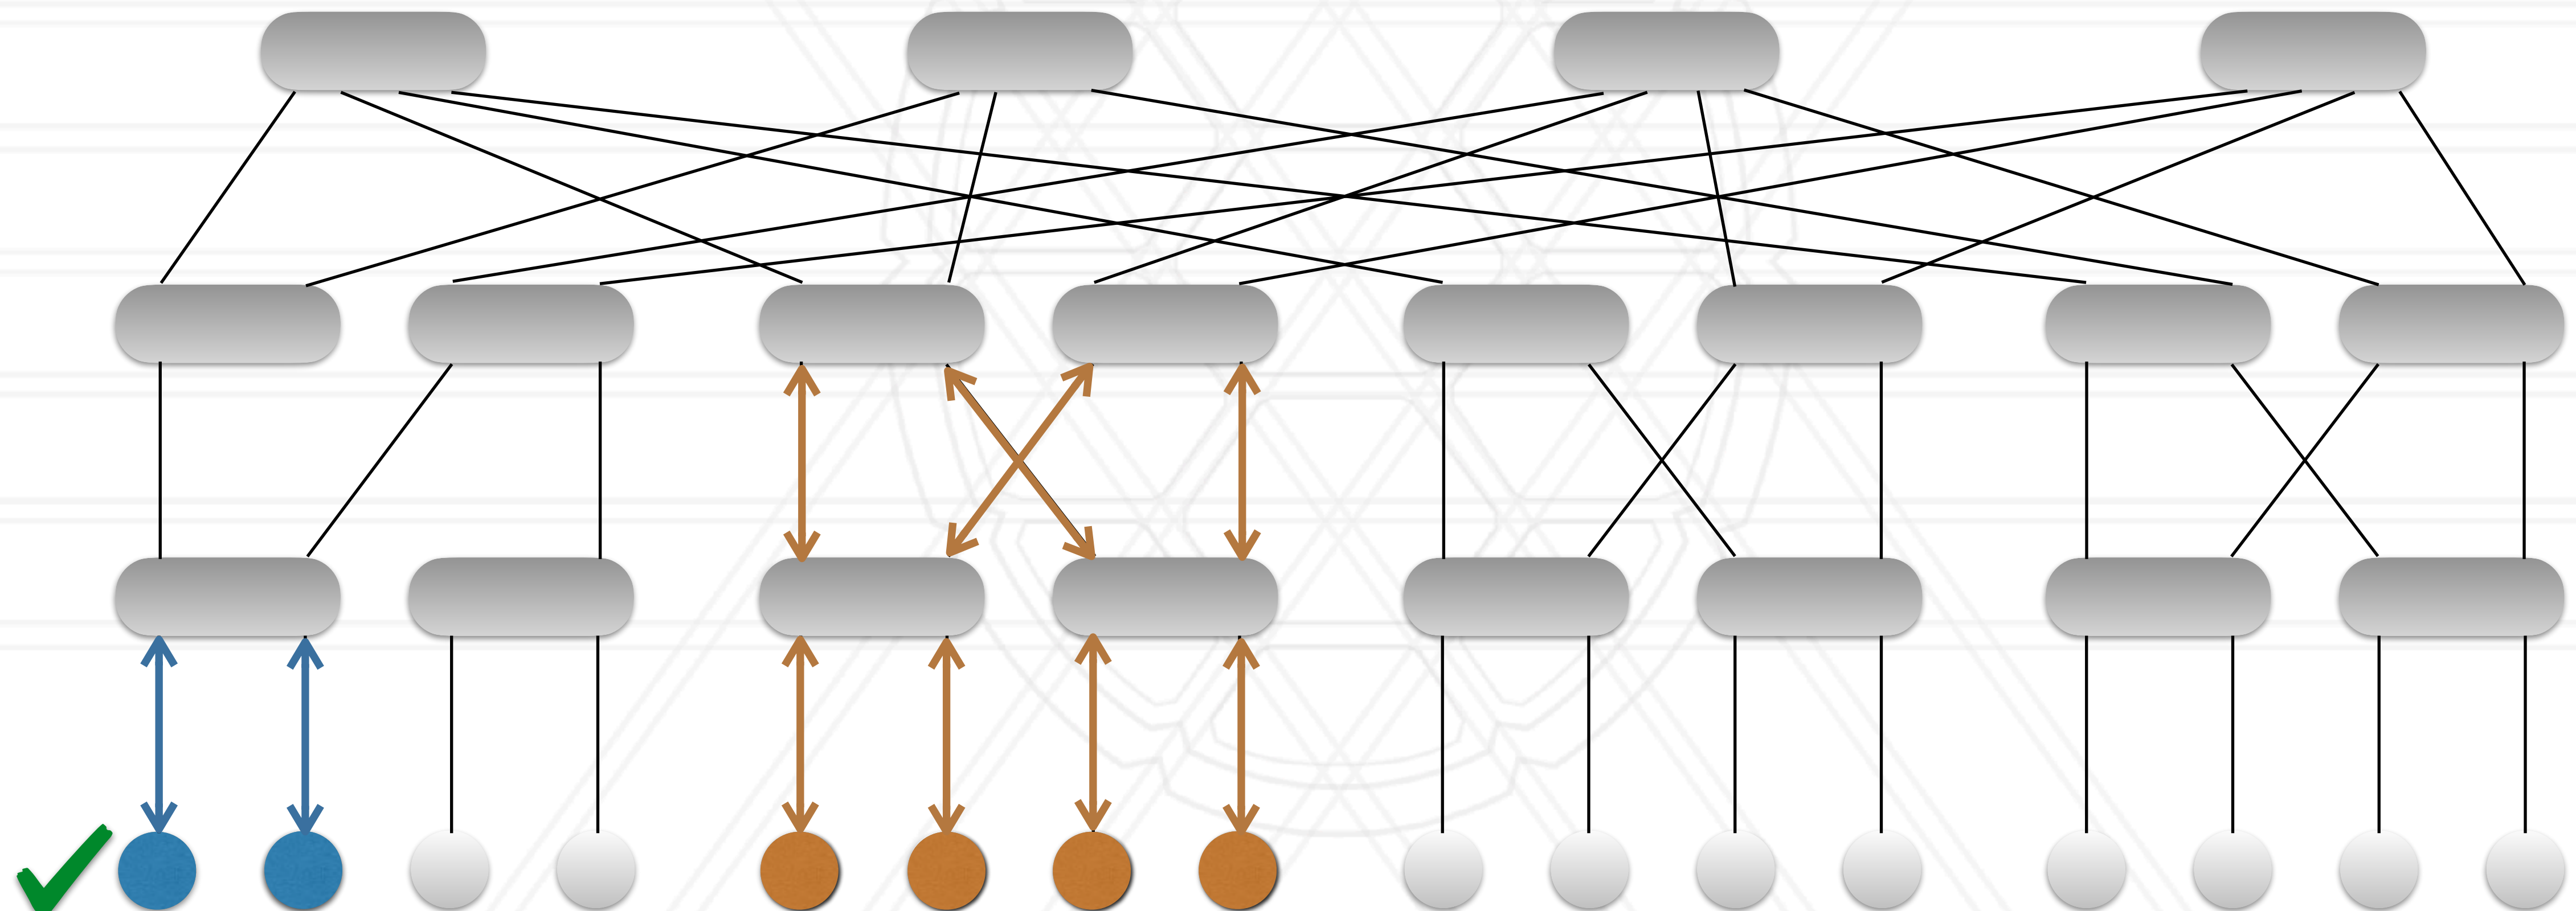


topology-aware node allocation

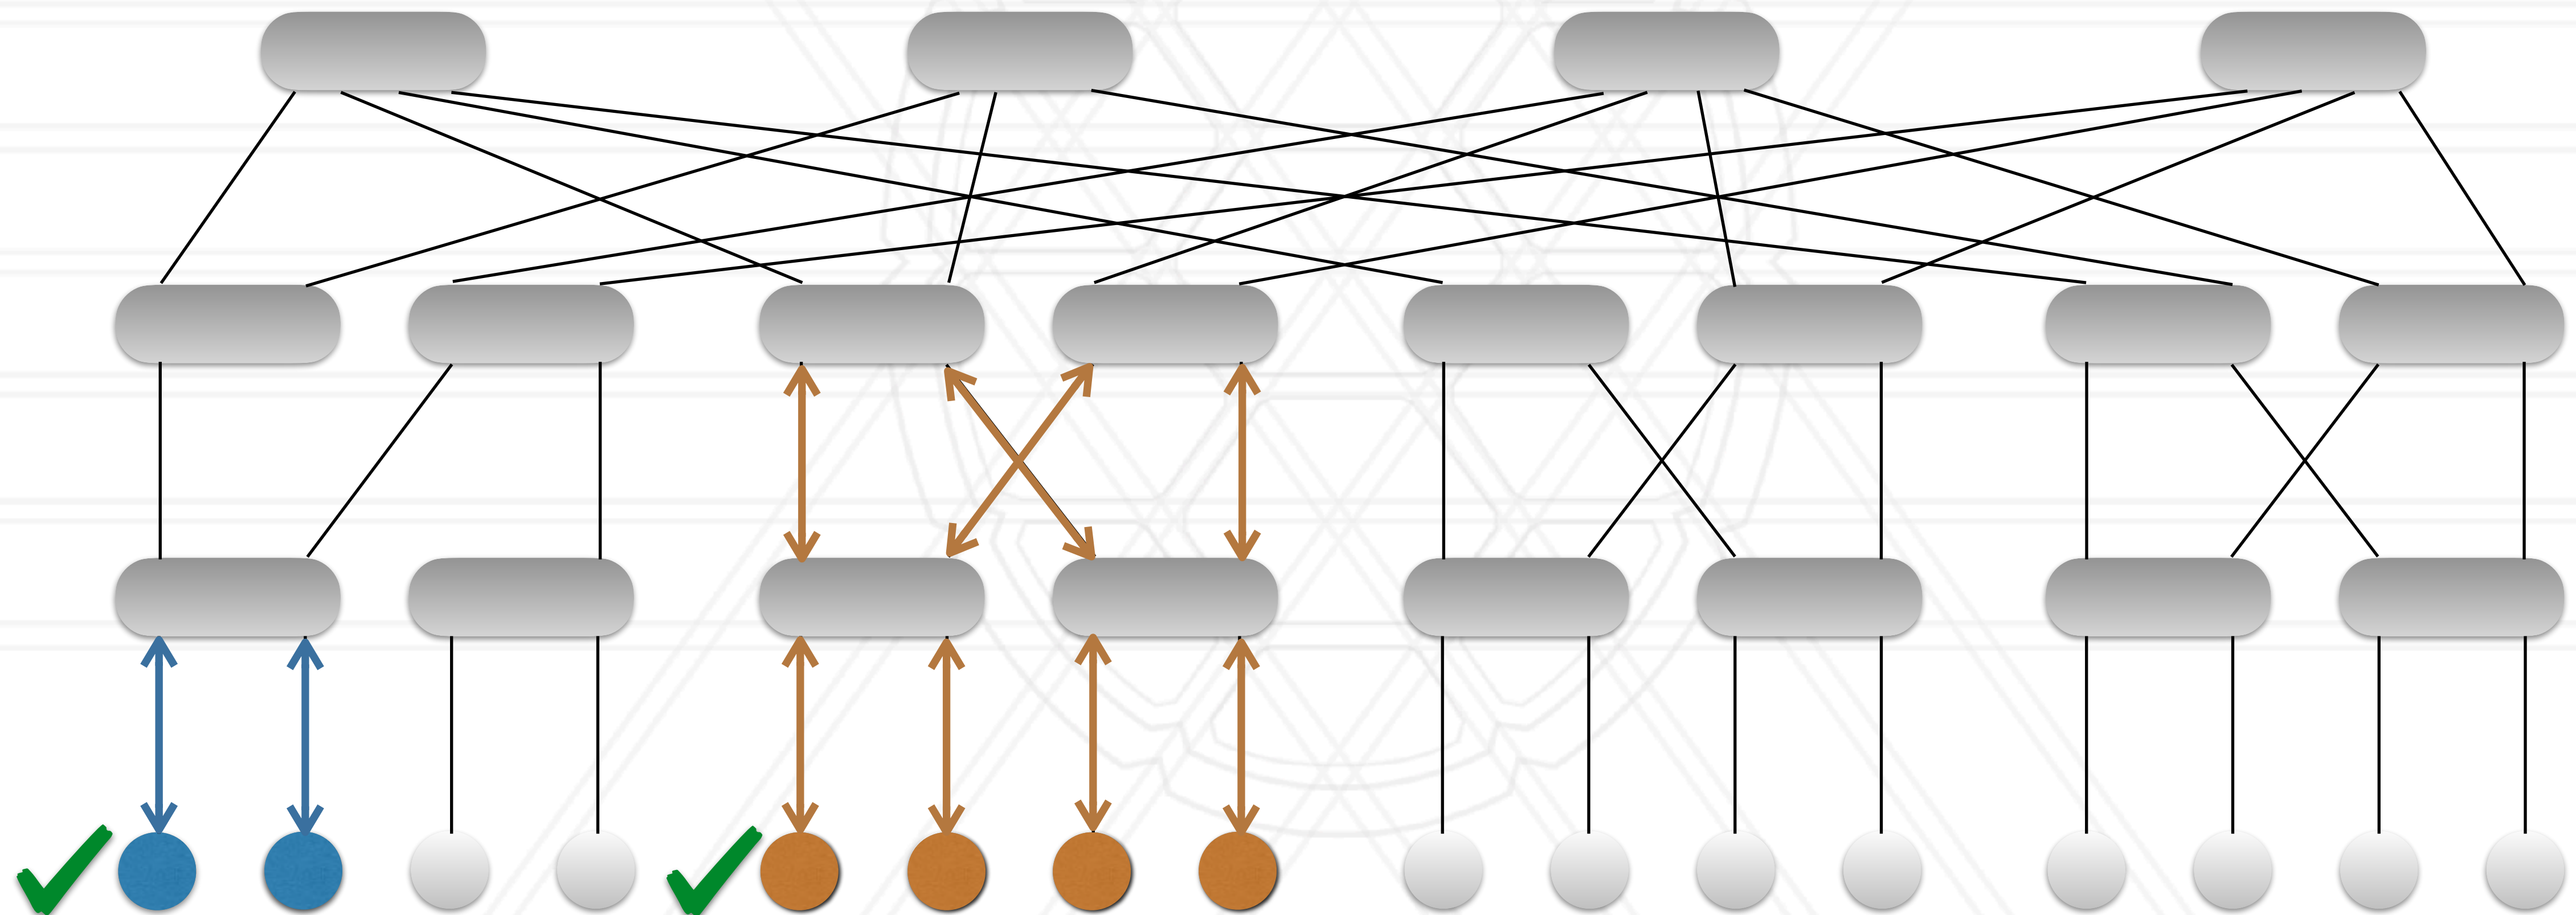


topology-aware node allocation

Solution: allocate nodes in a manner that prevents sharing of links by multiple jobs while maintaining high utilization

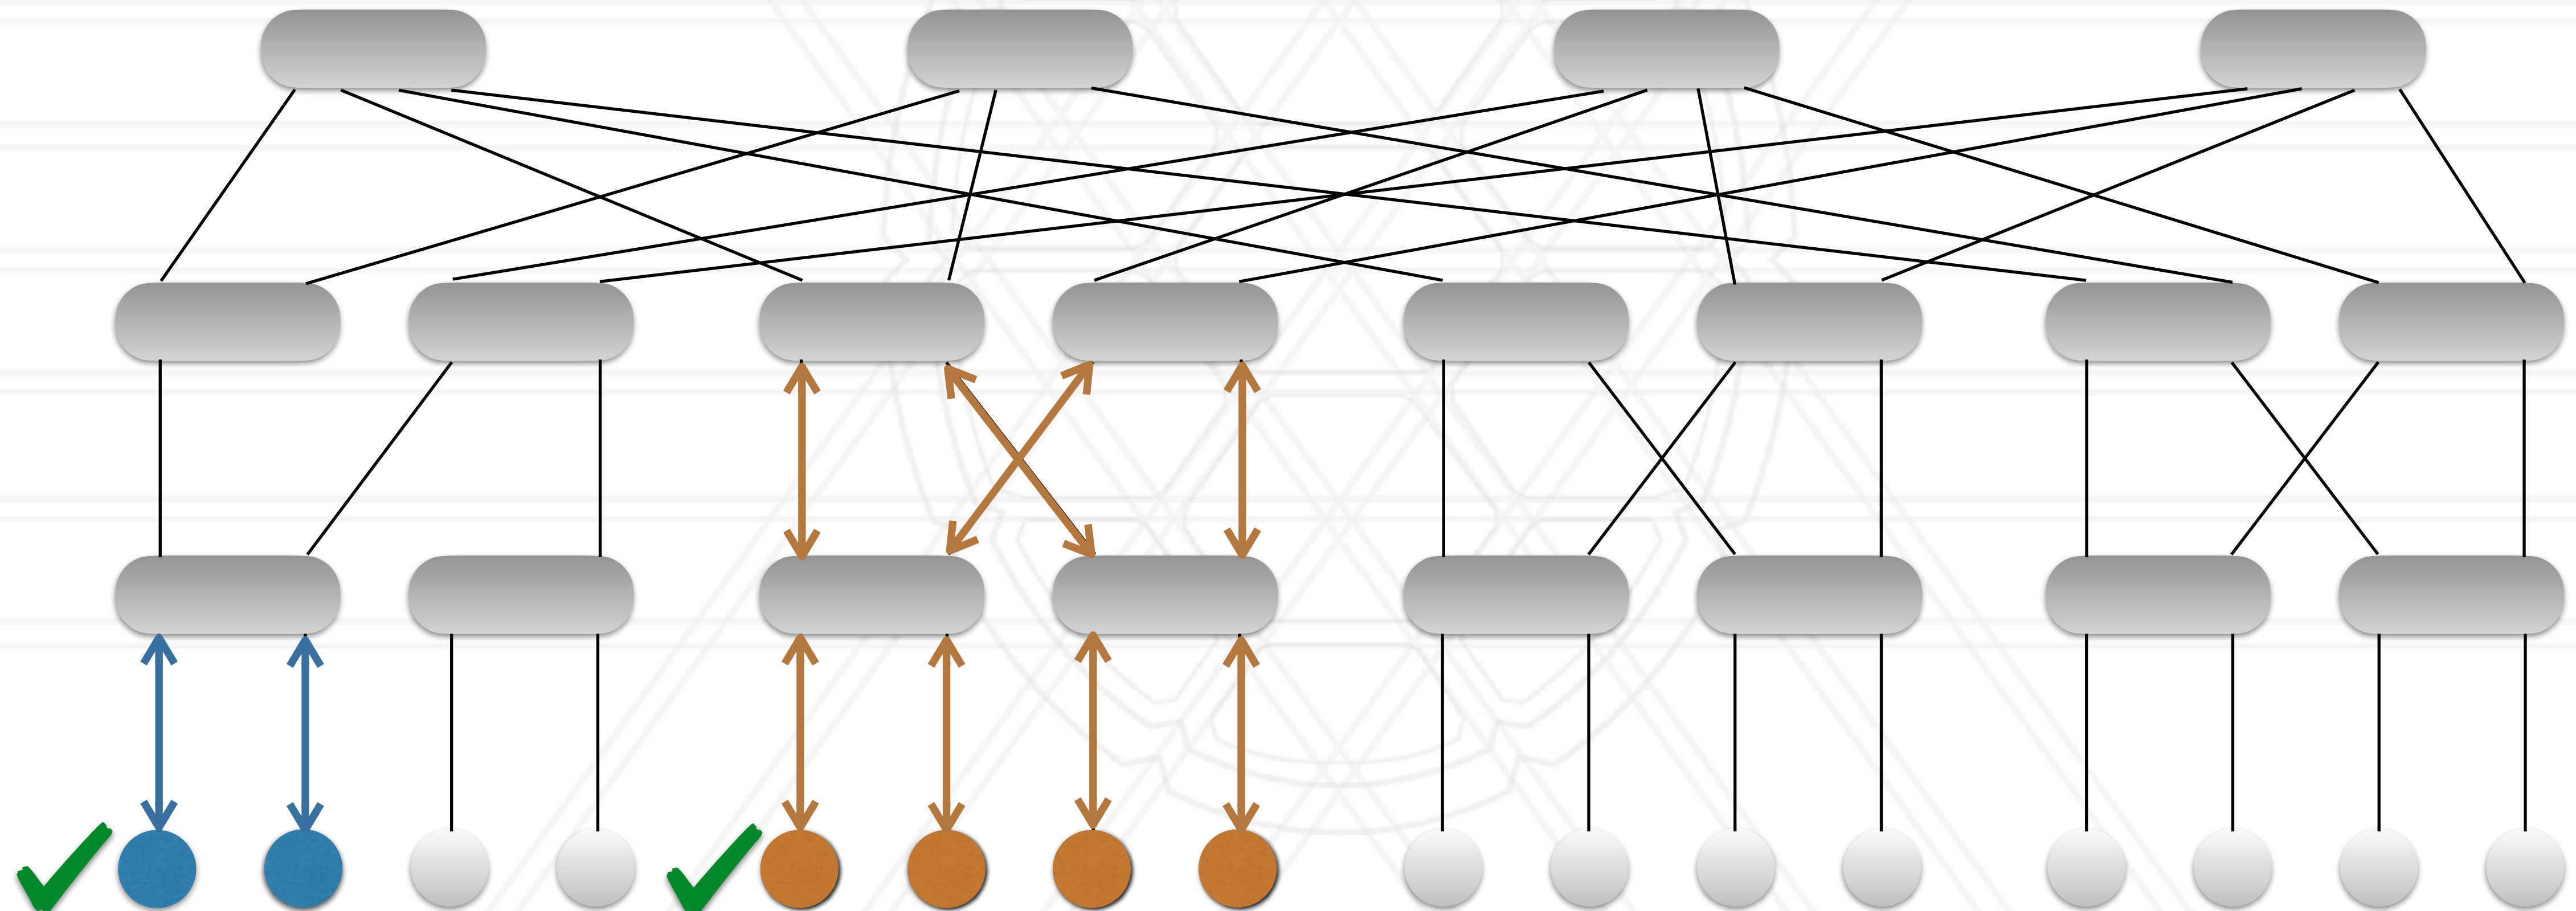

AFAR: adaptive flow aware routing

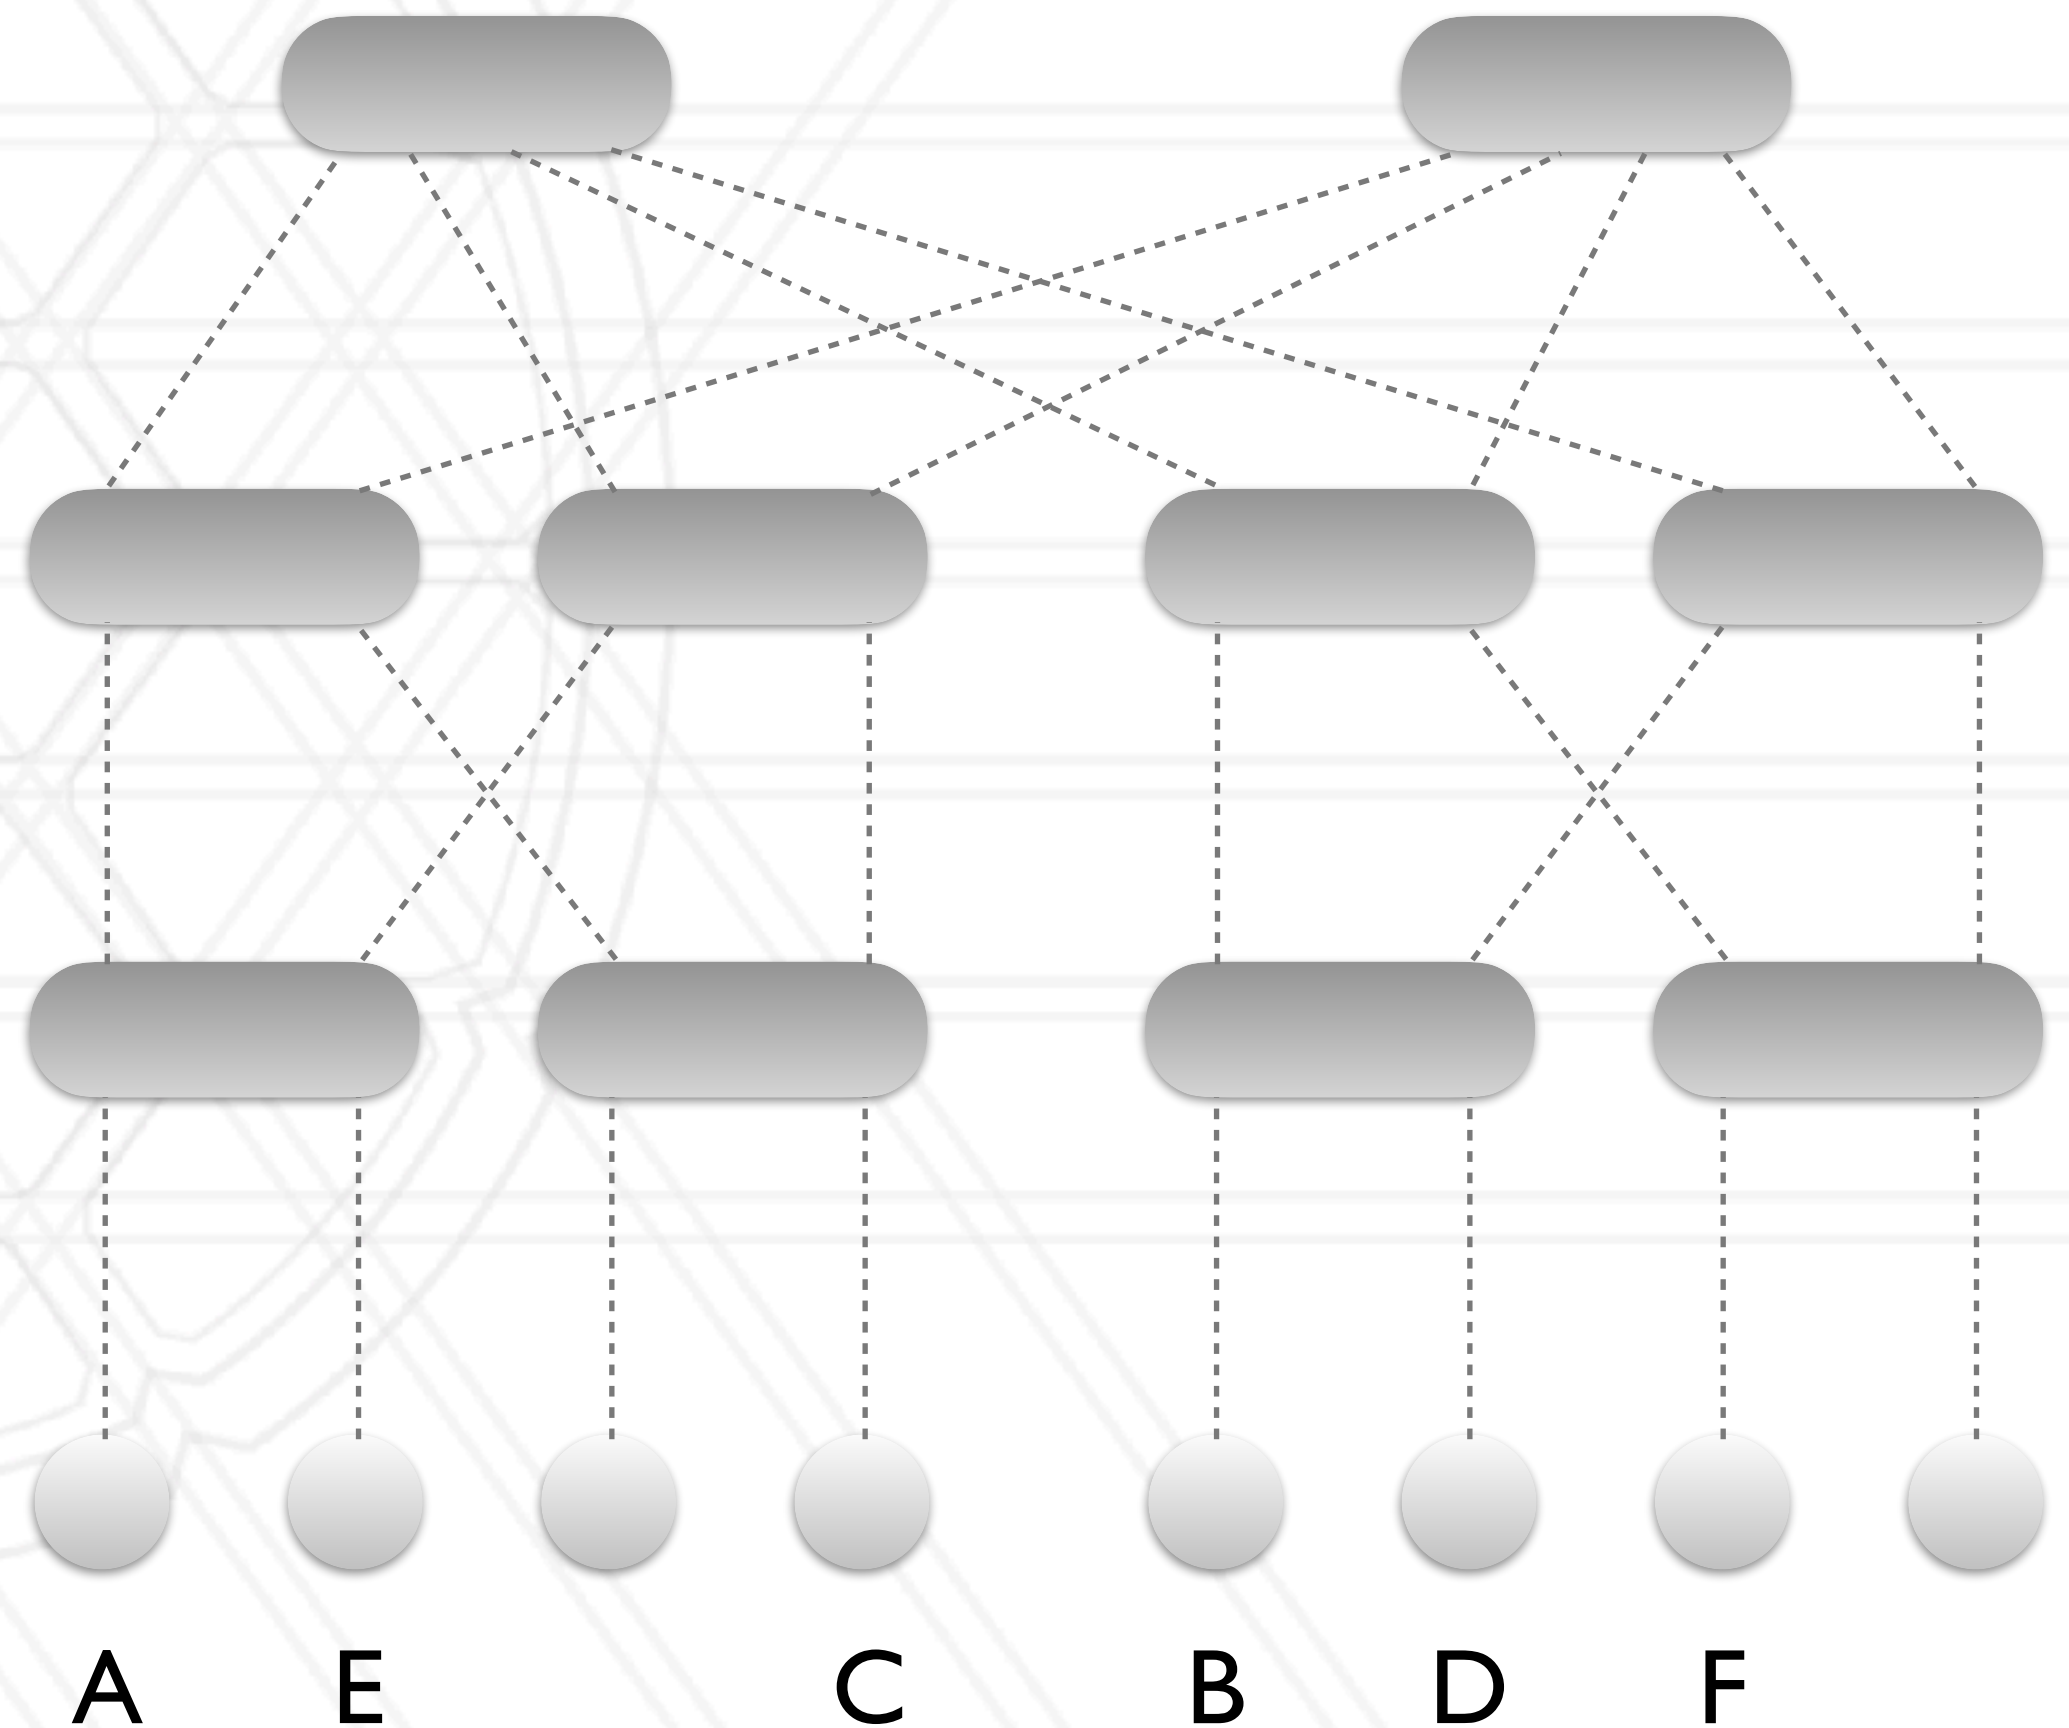


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

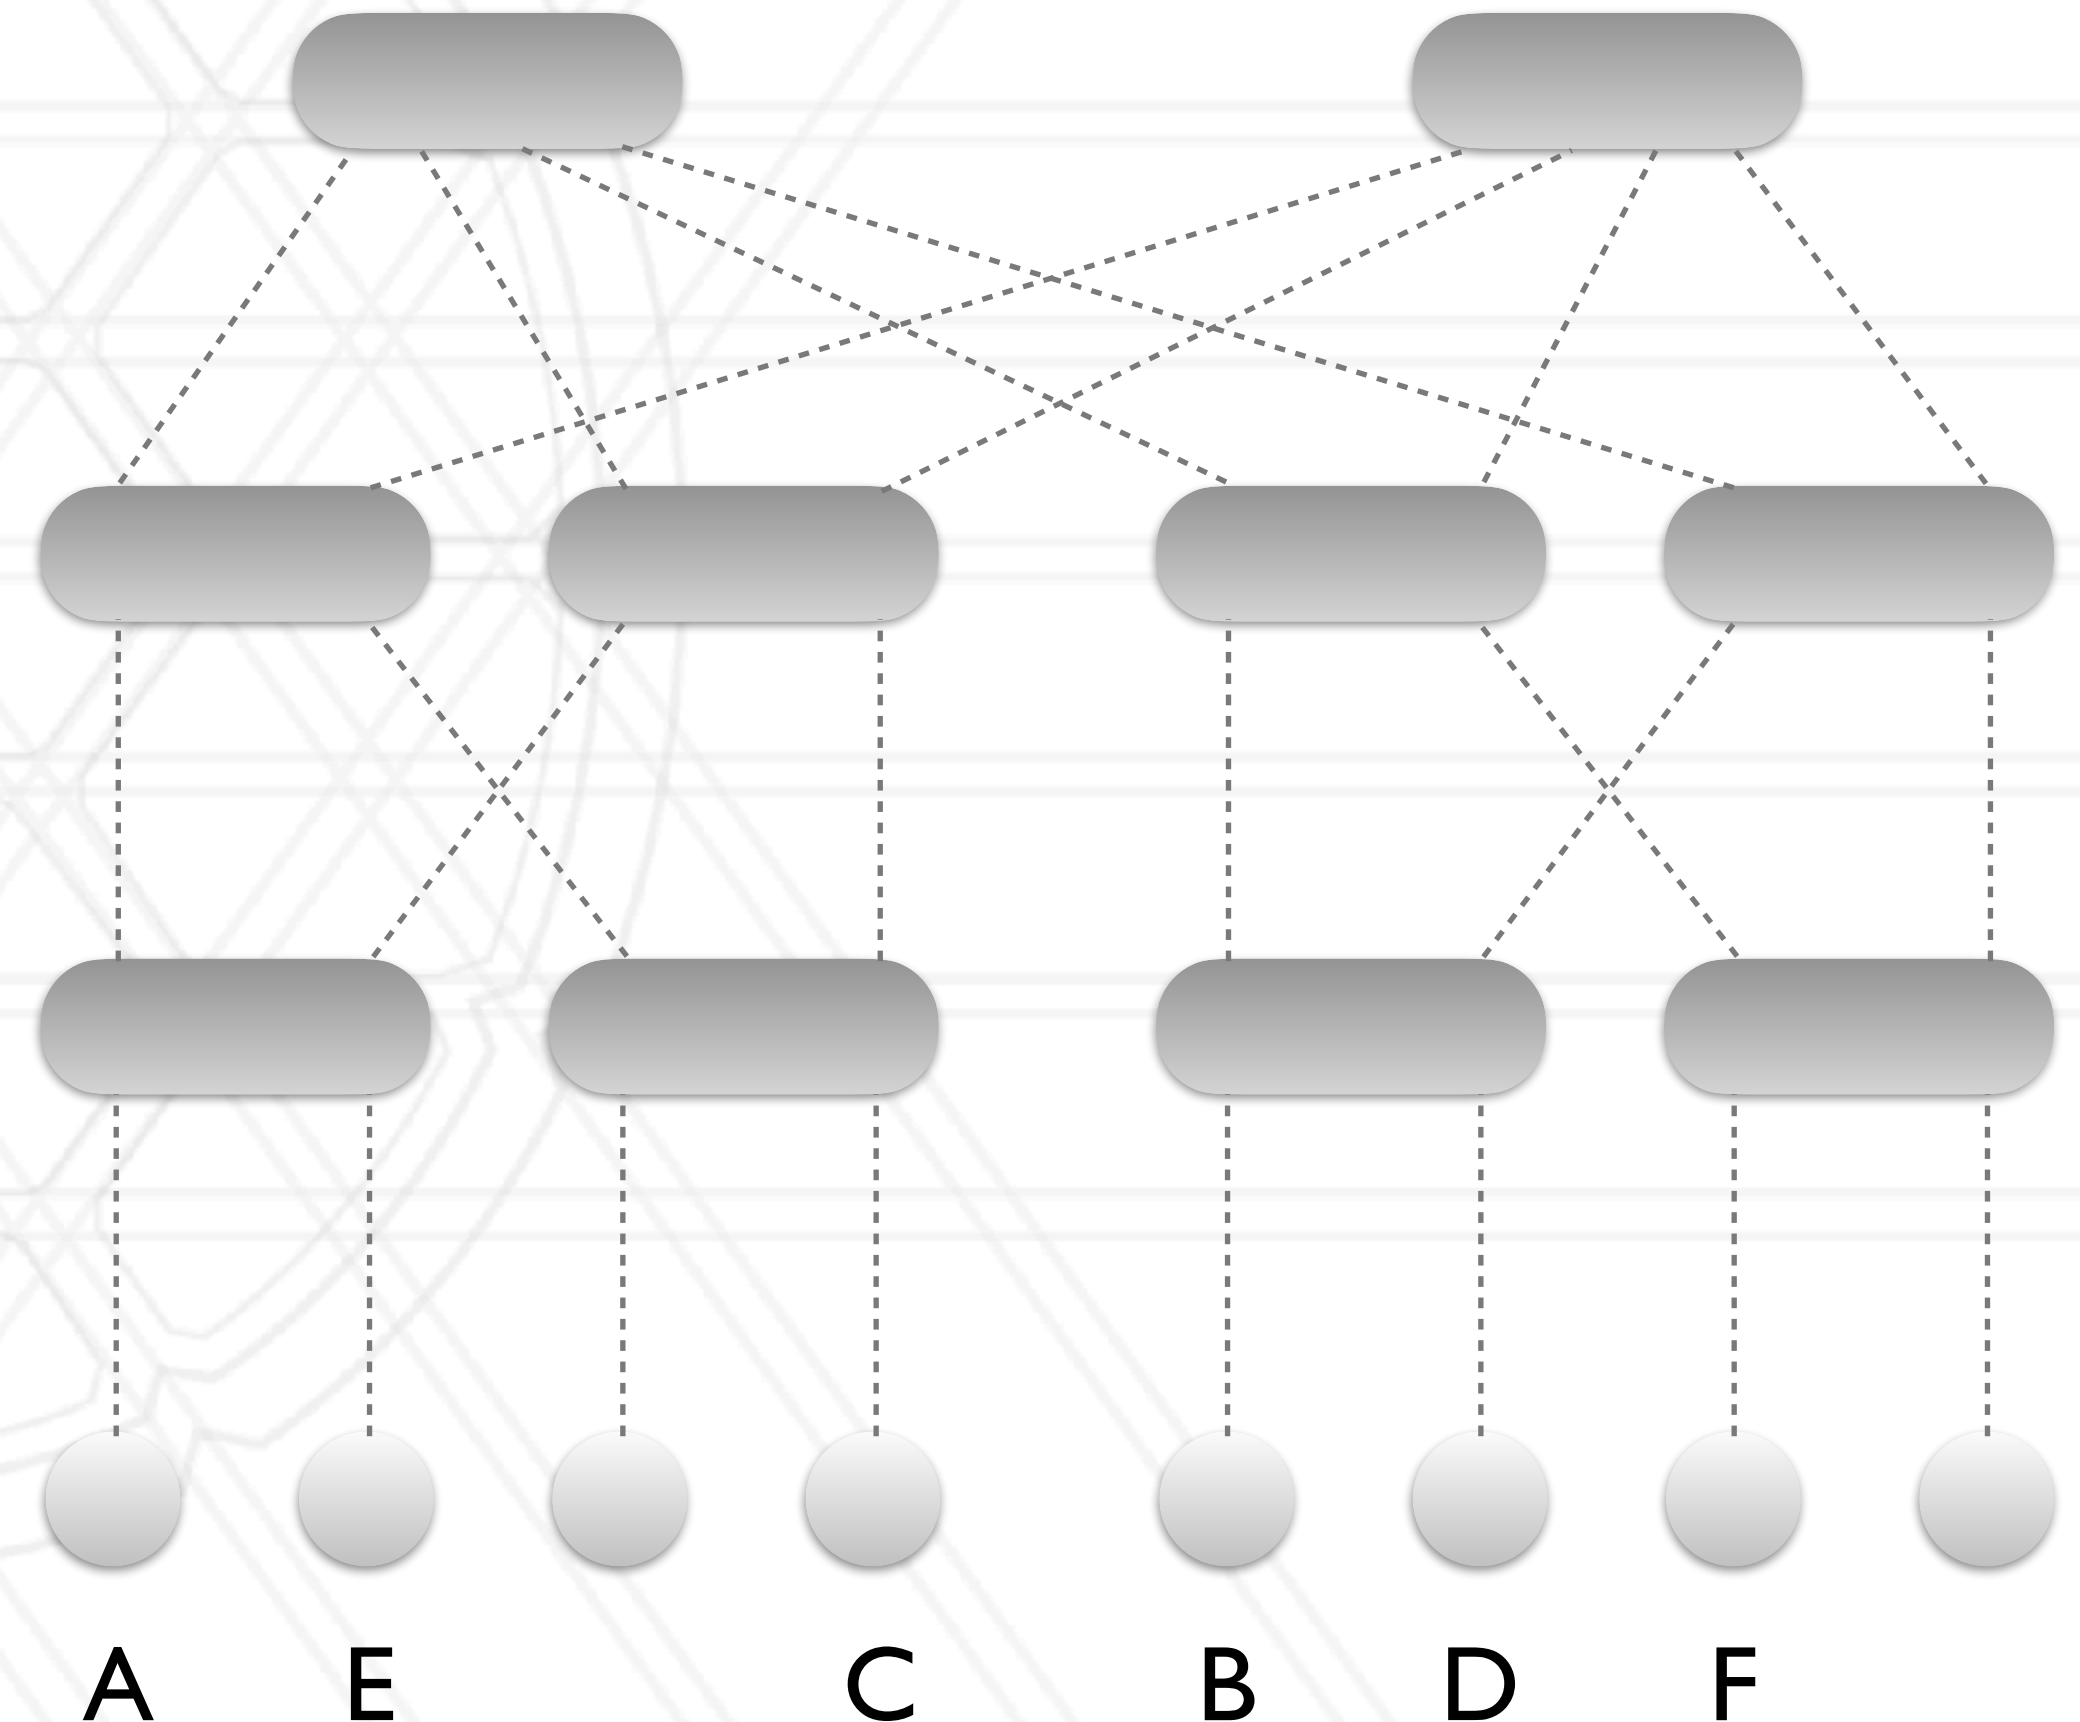


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

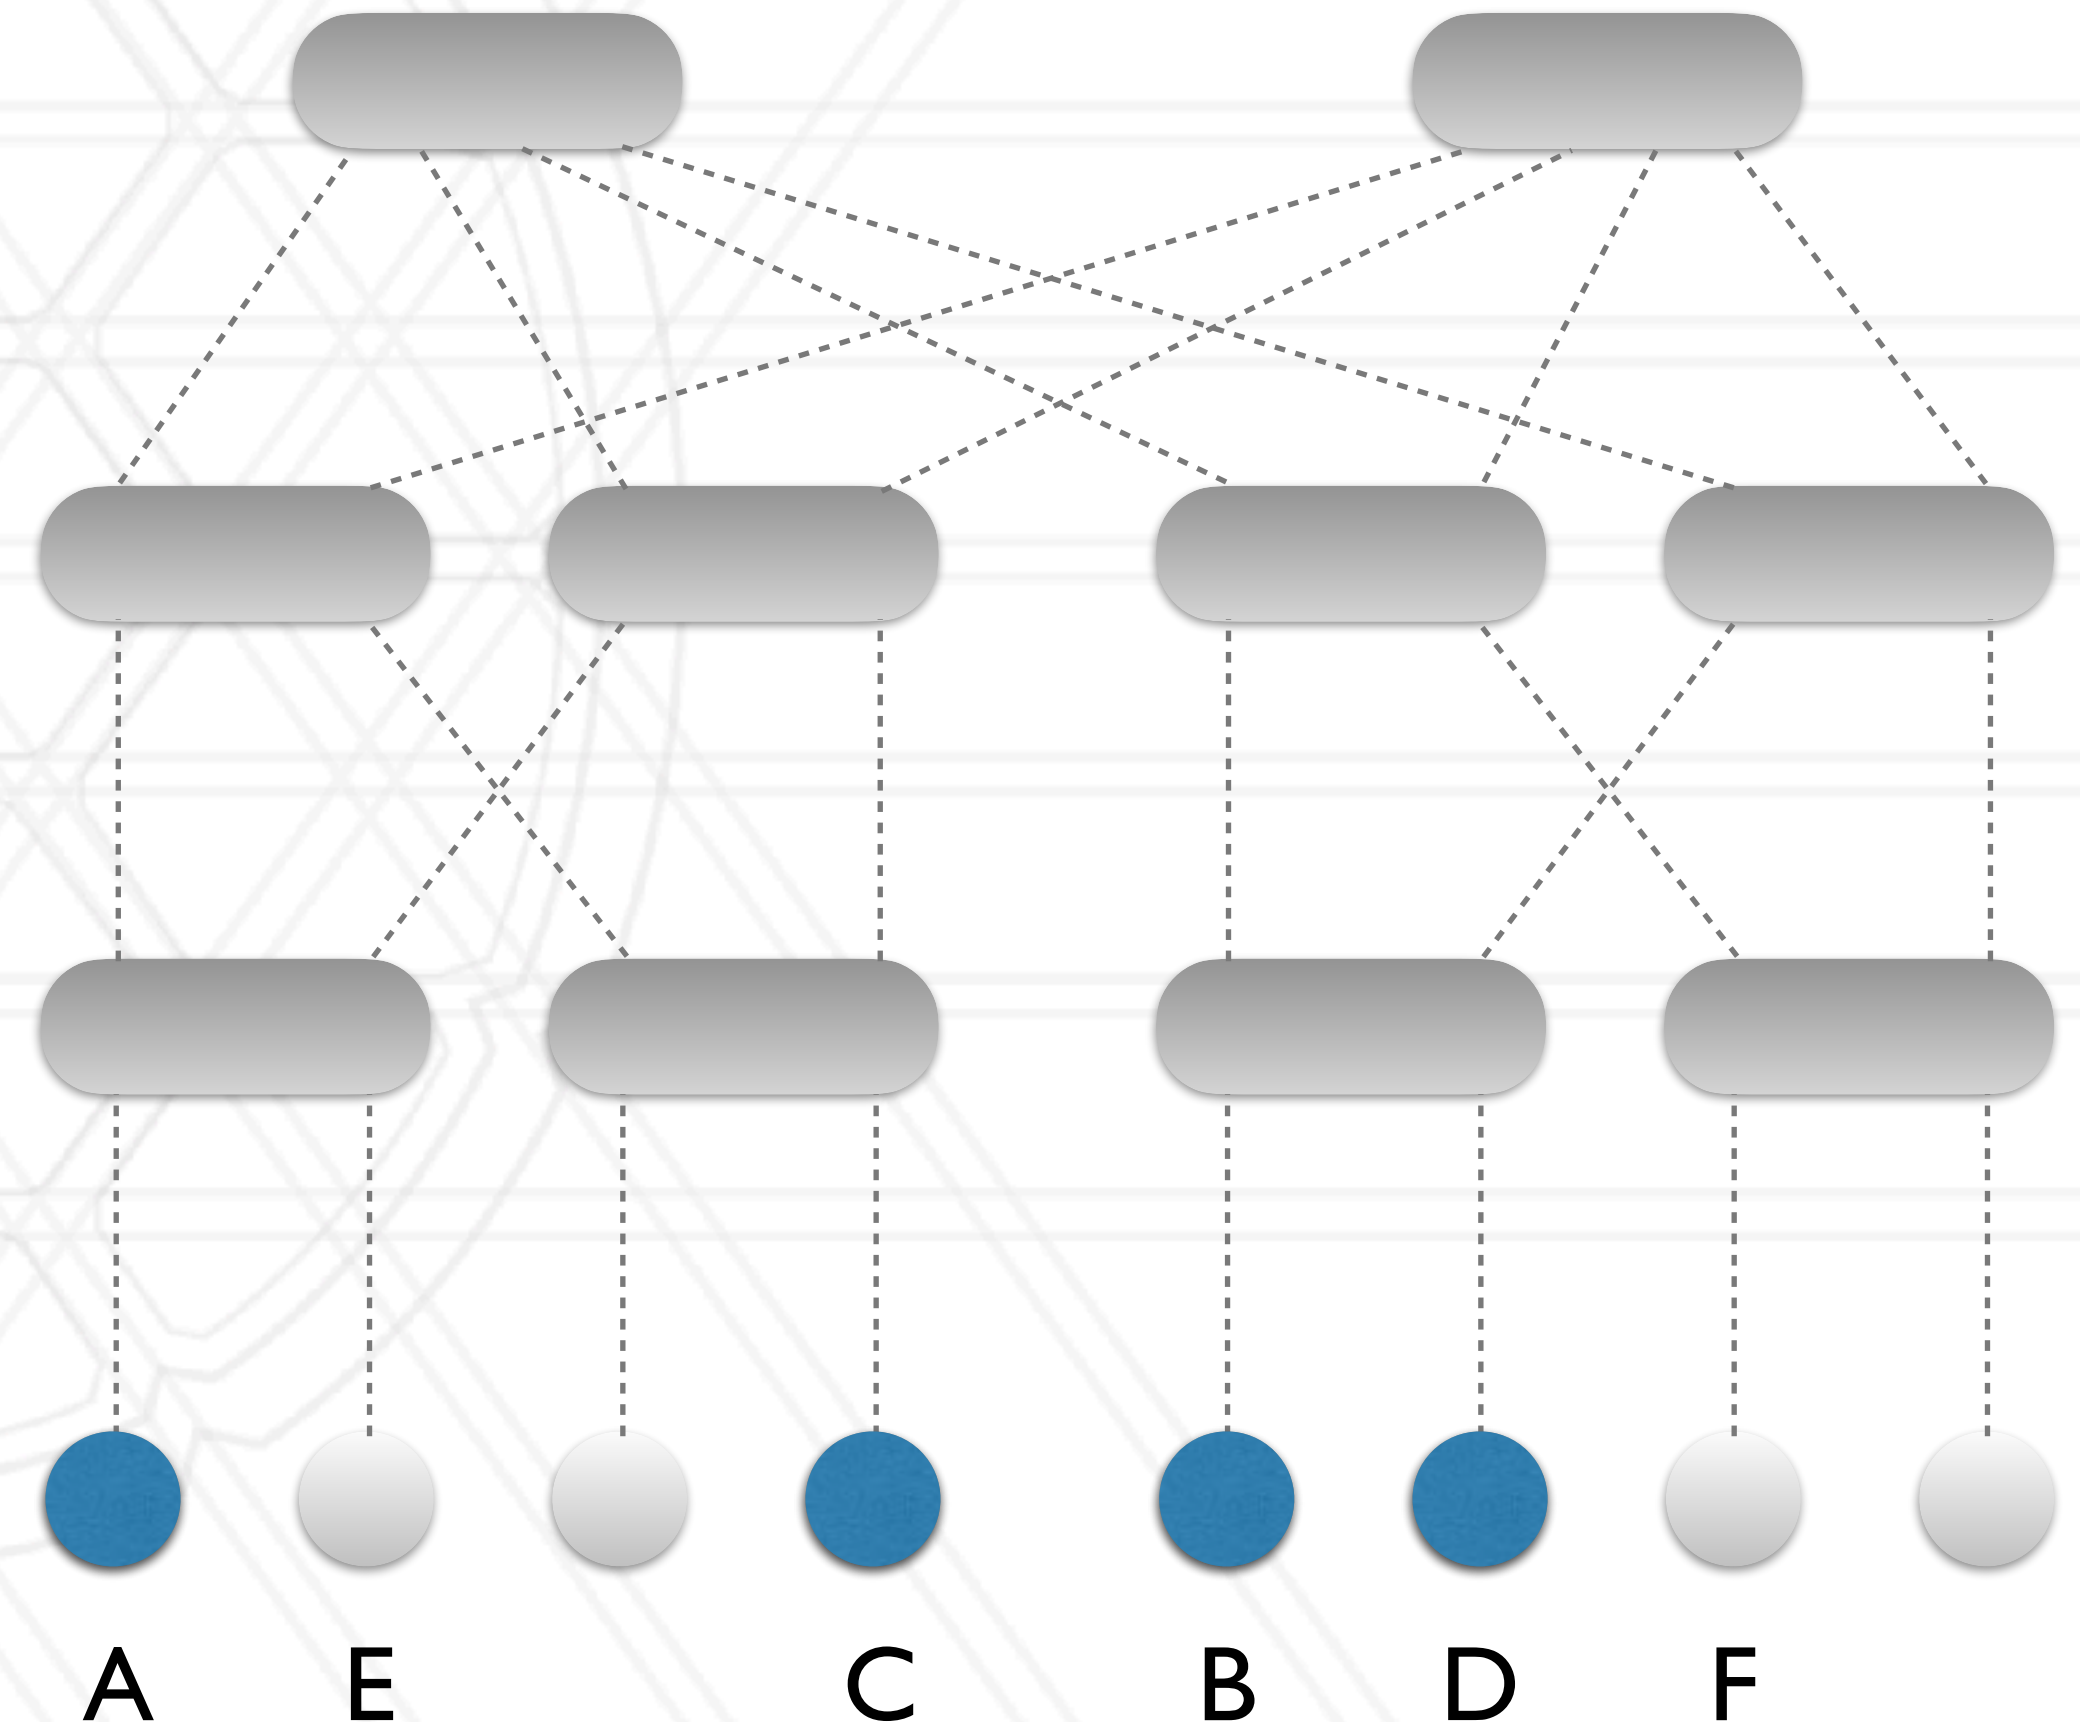


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

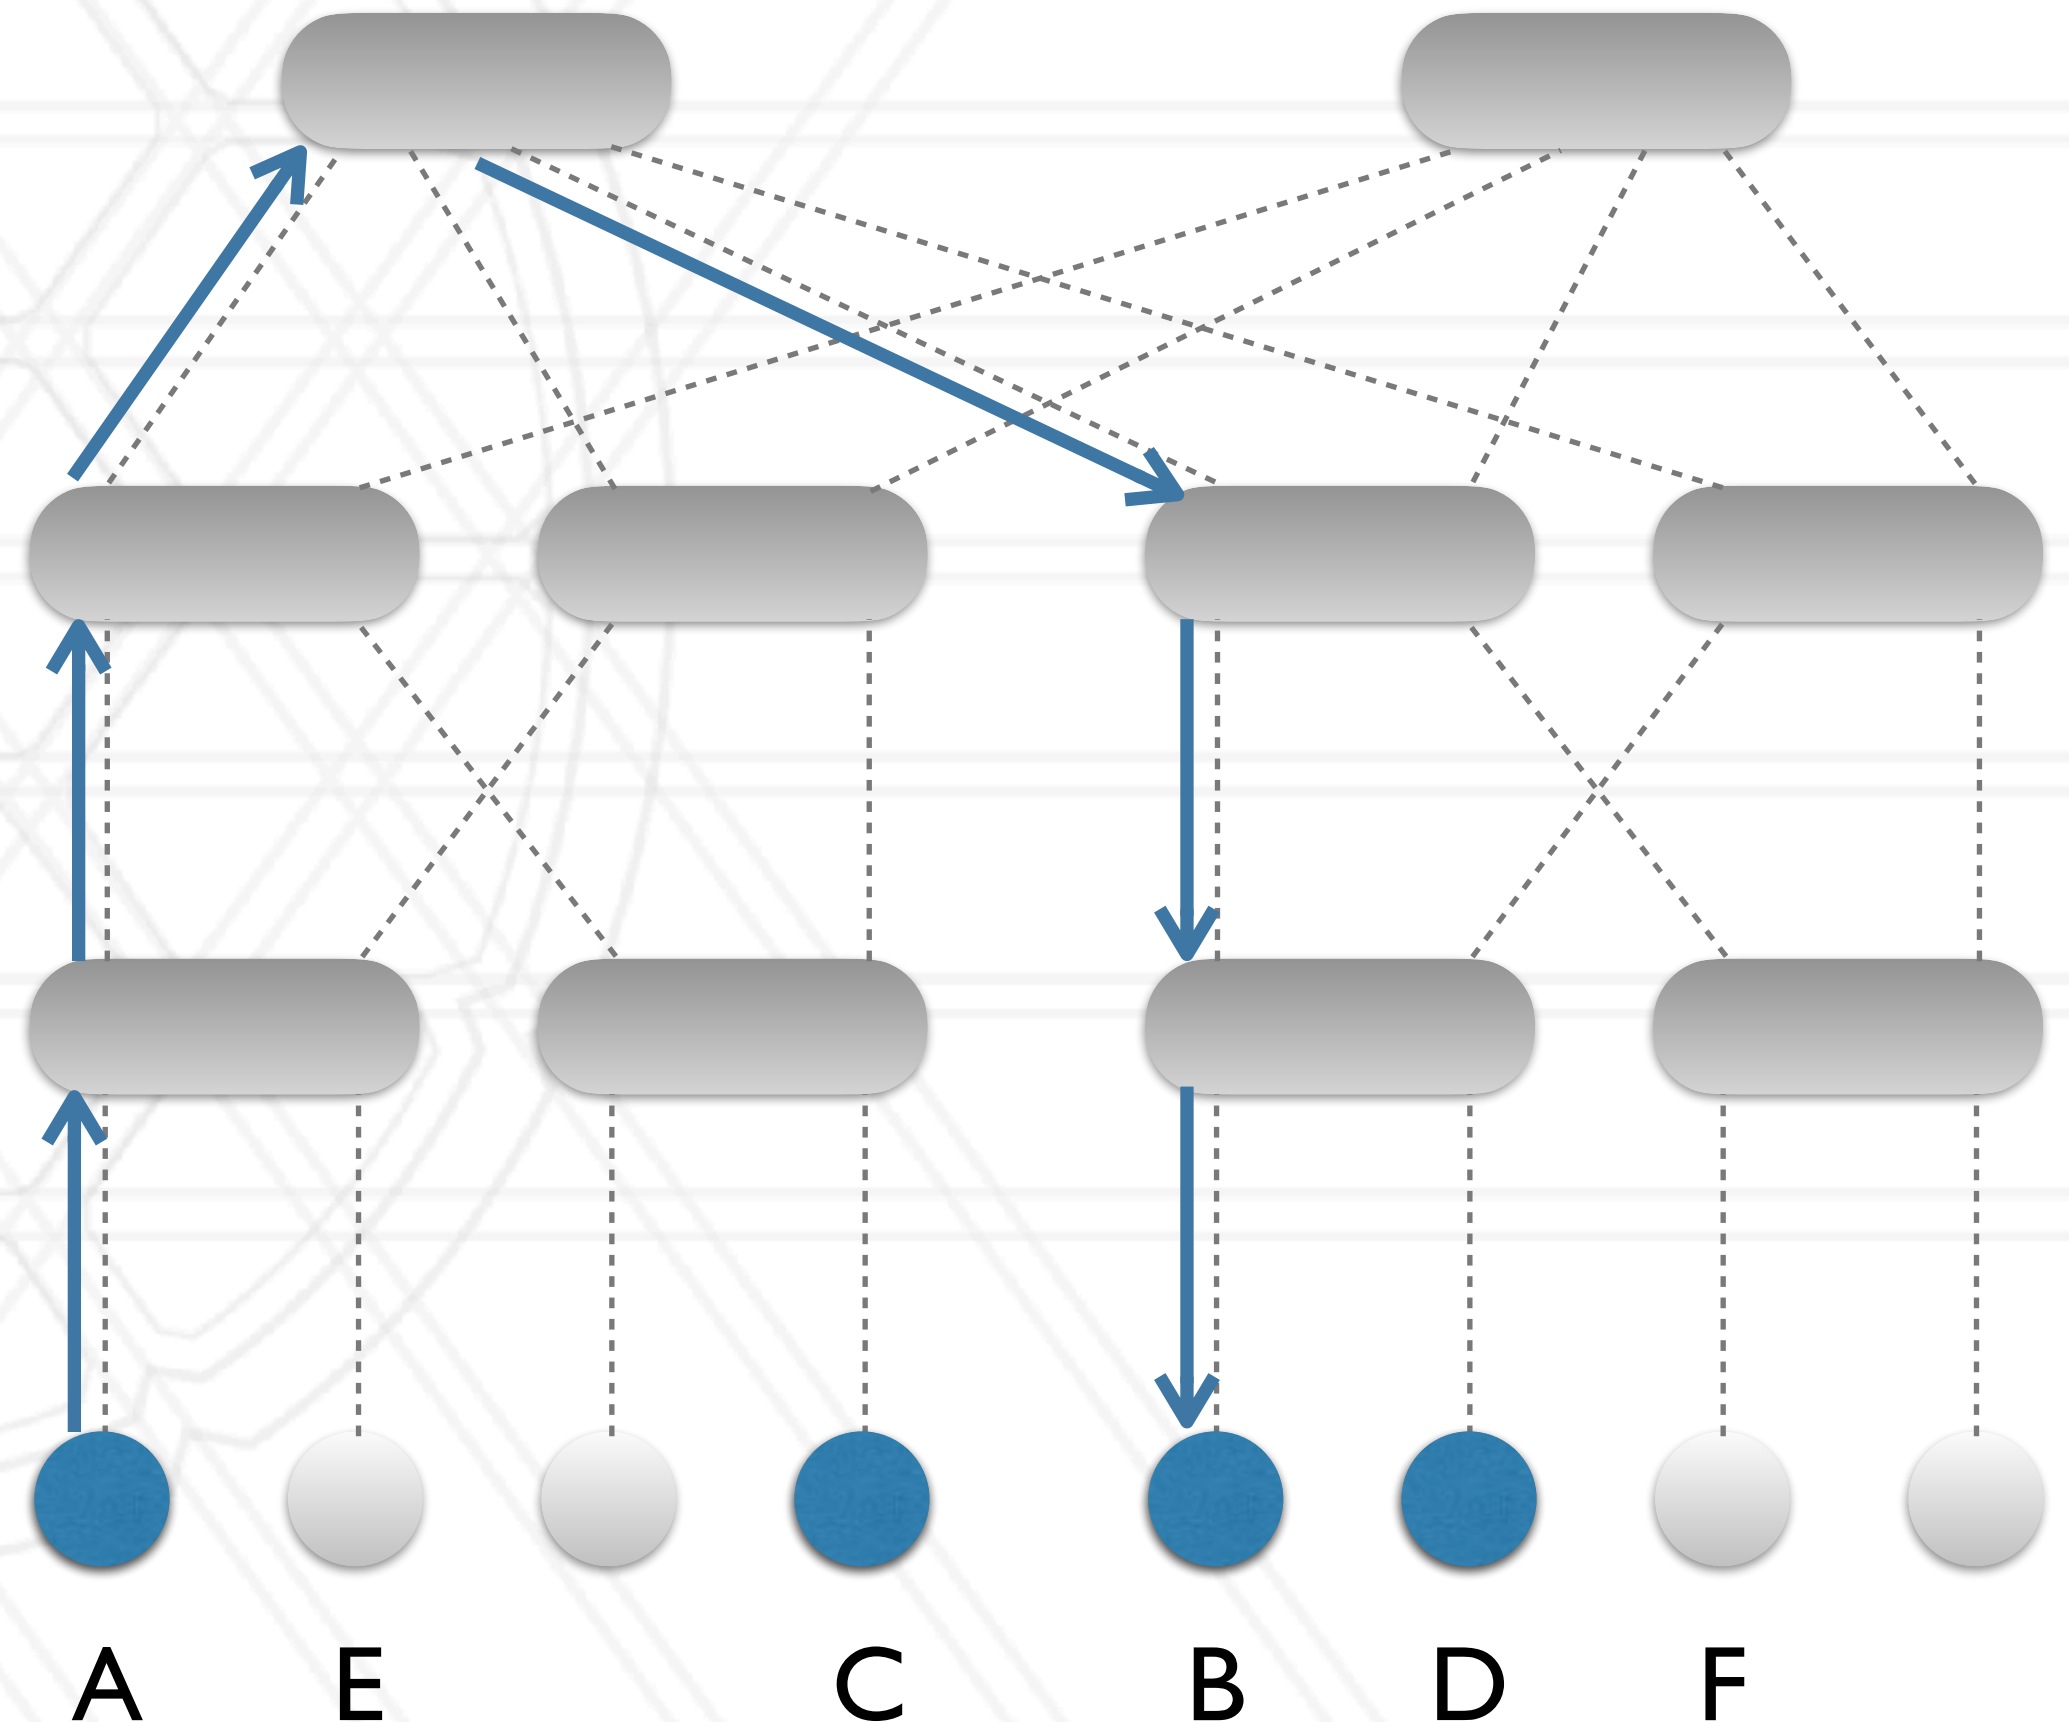


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

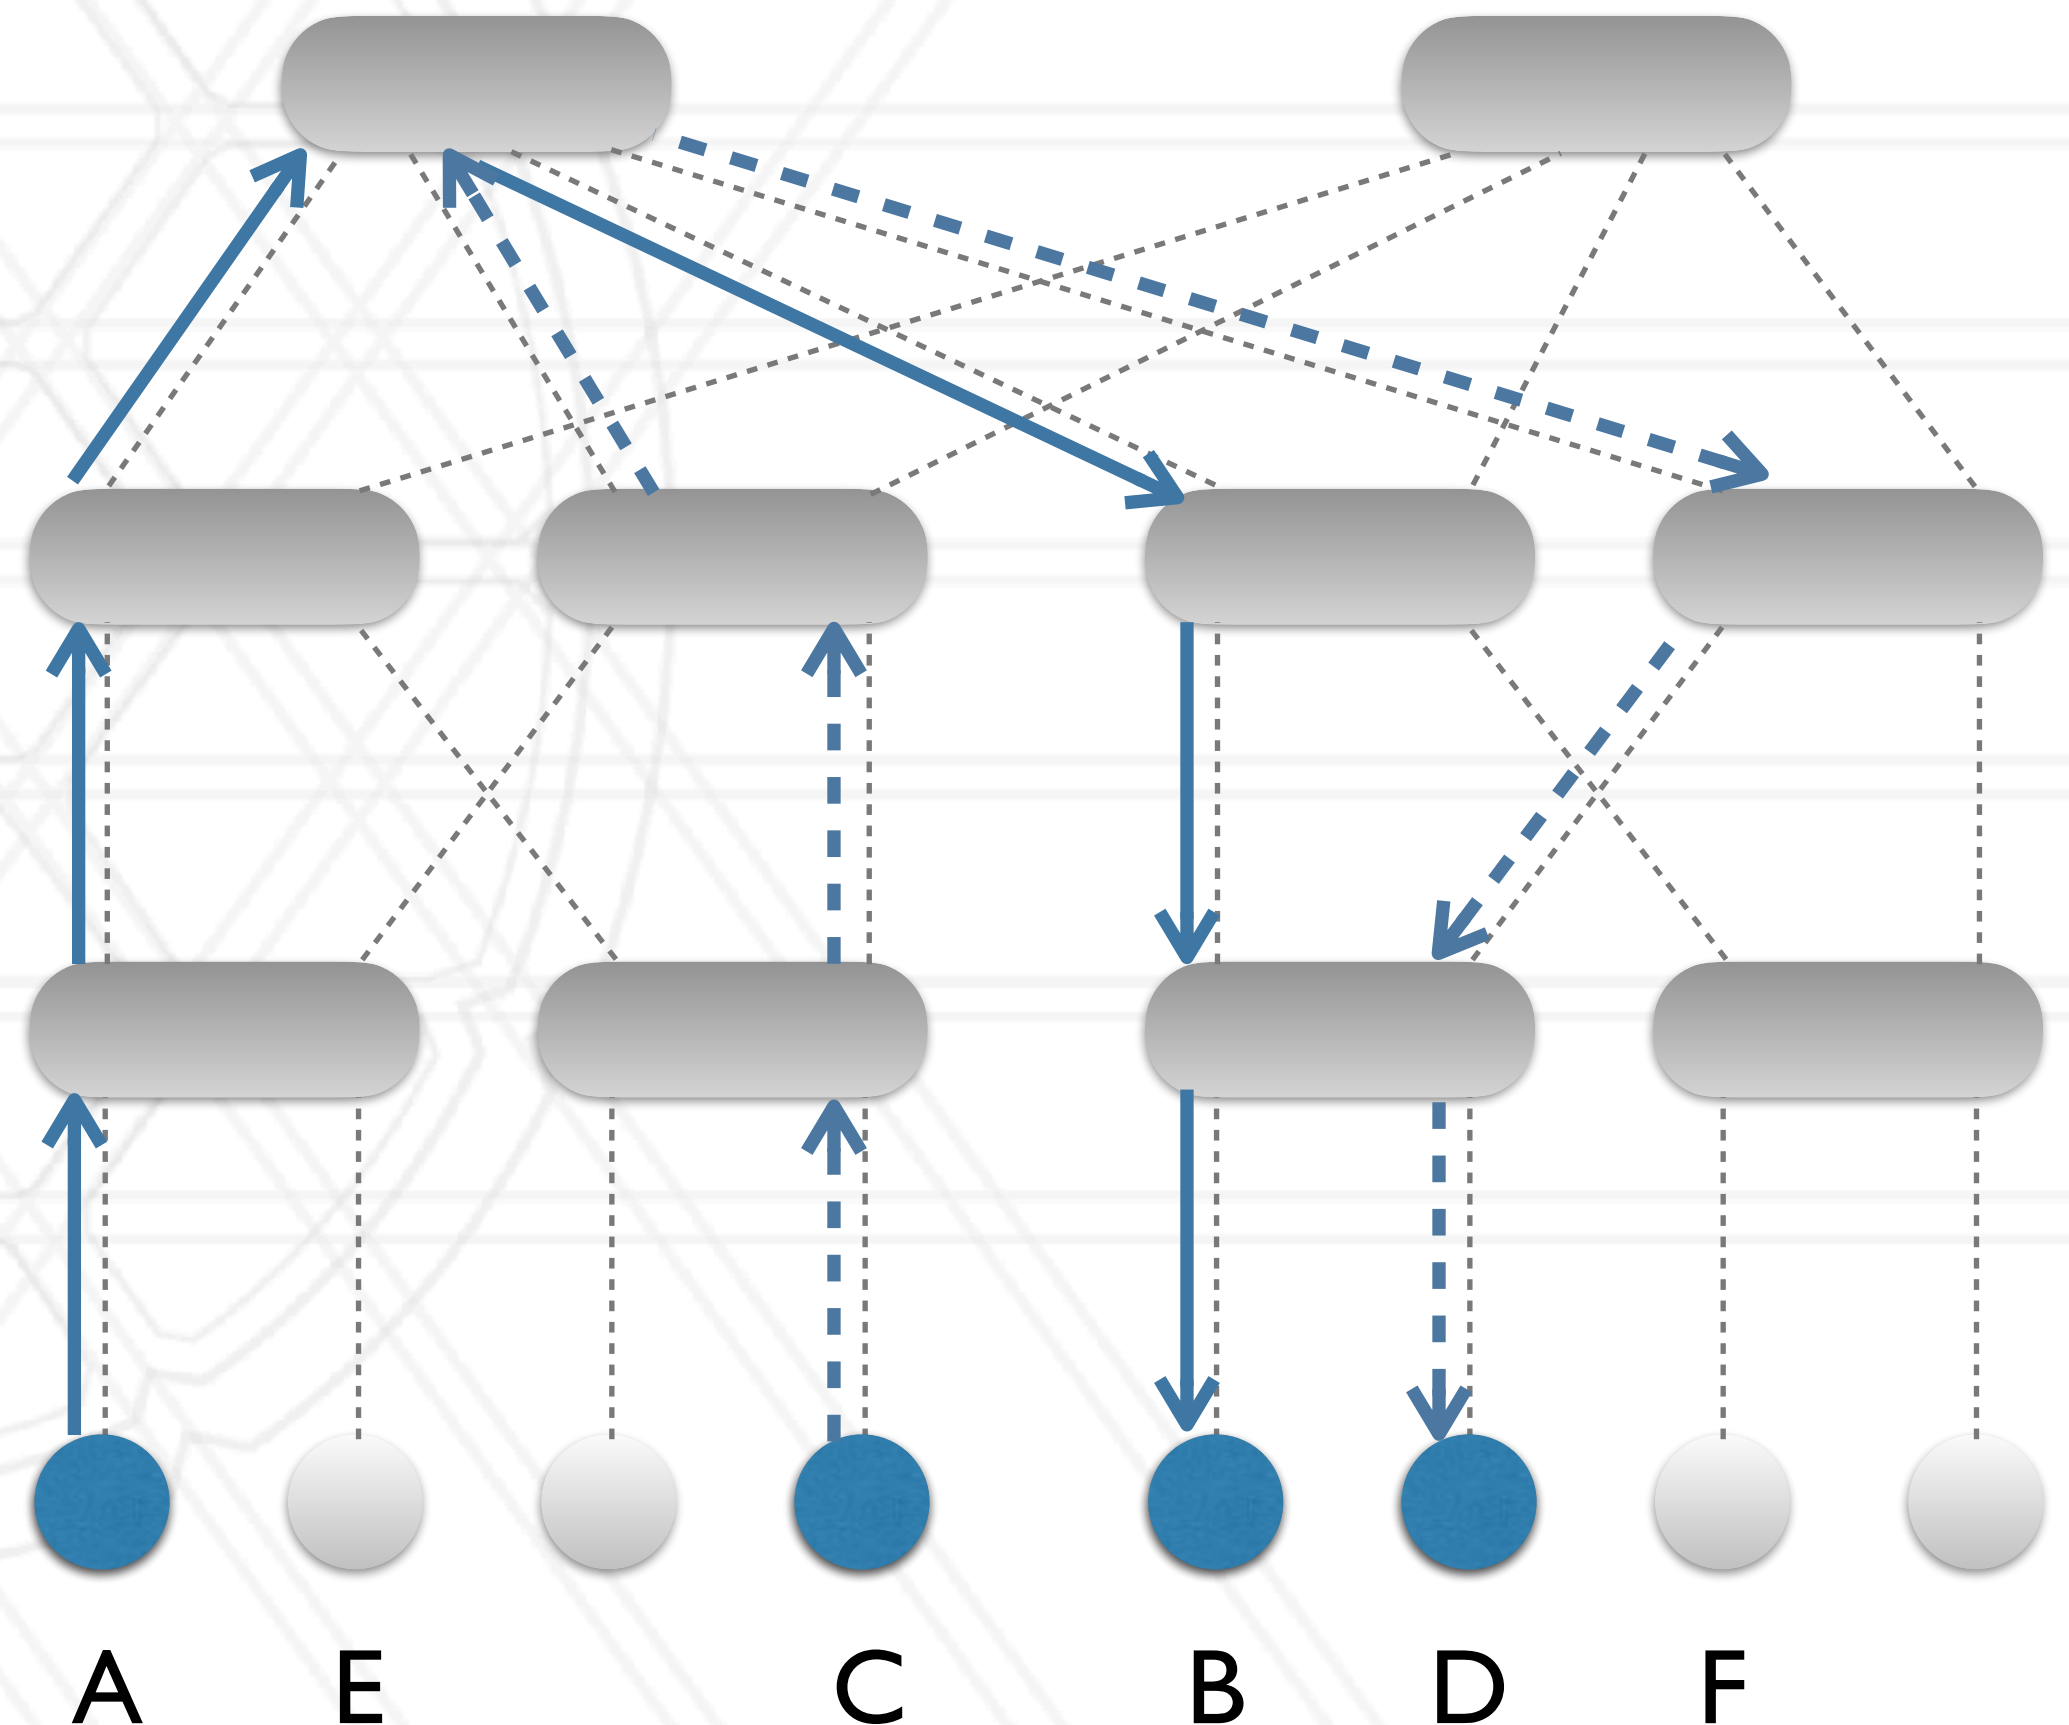


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

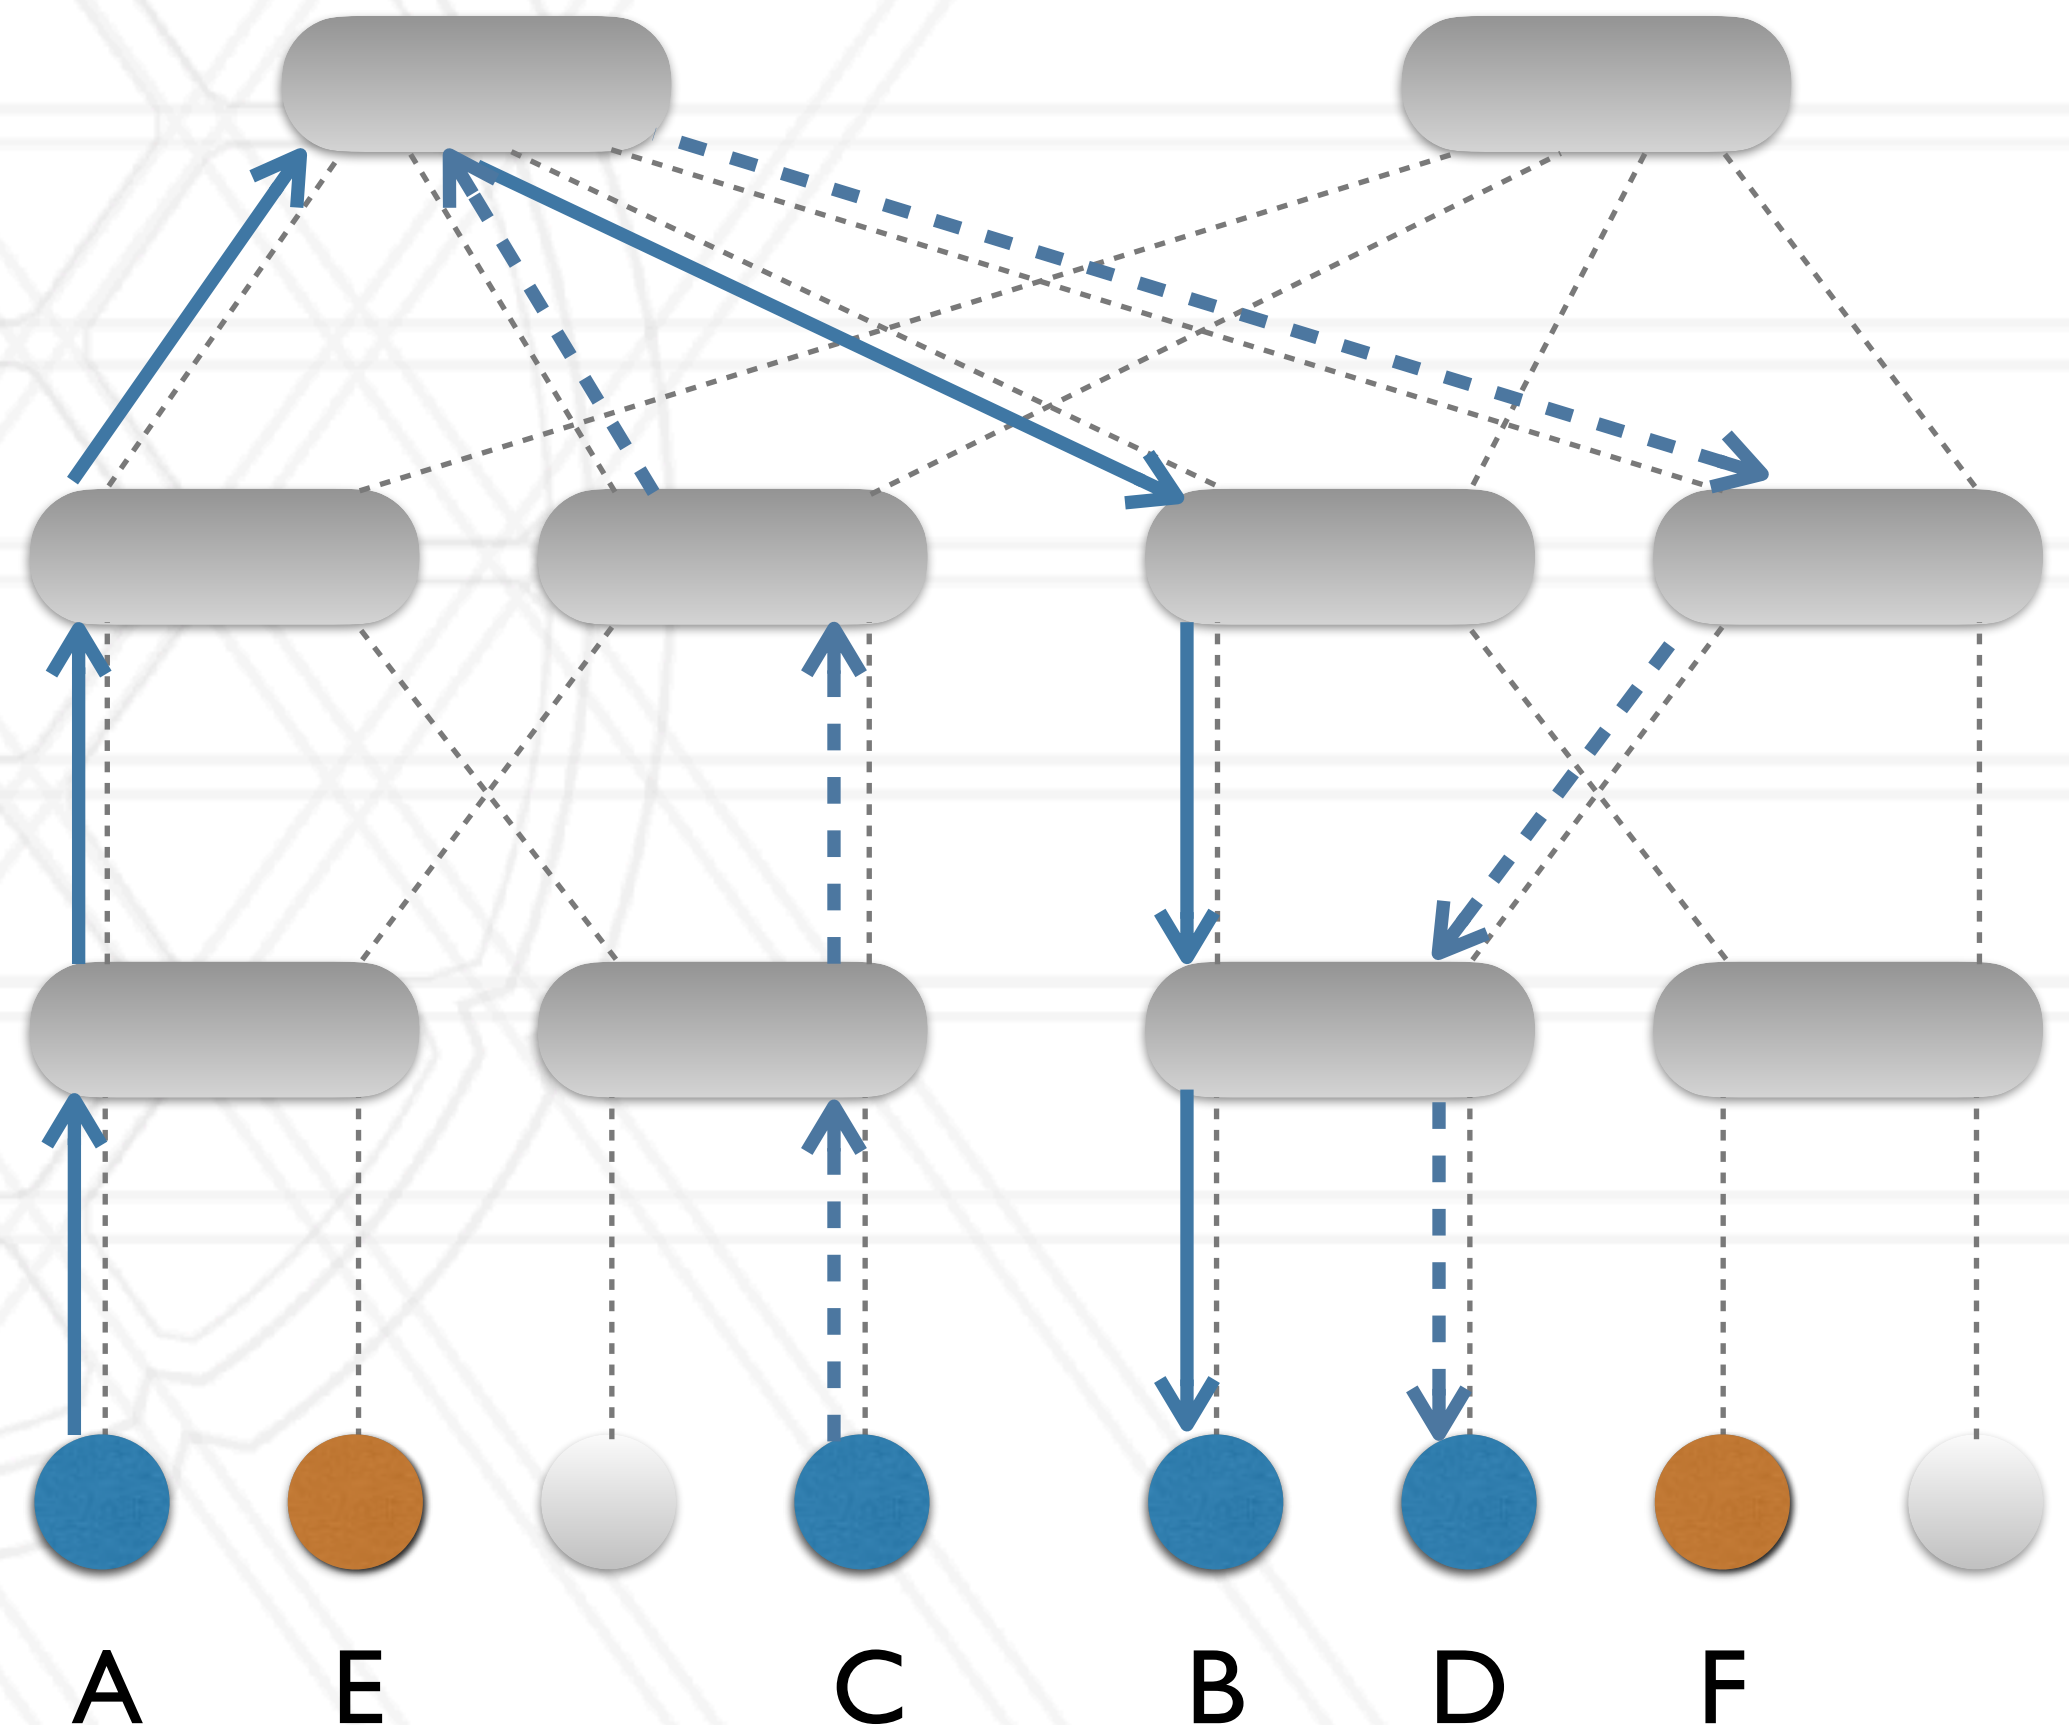


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

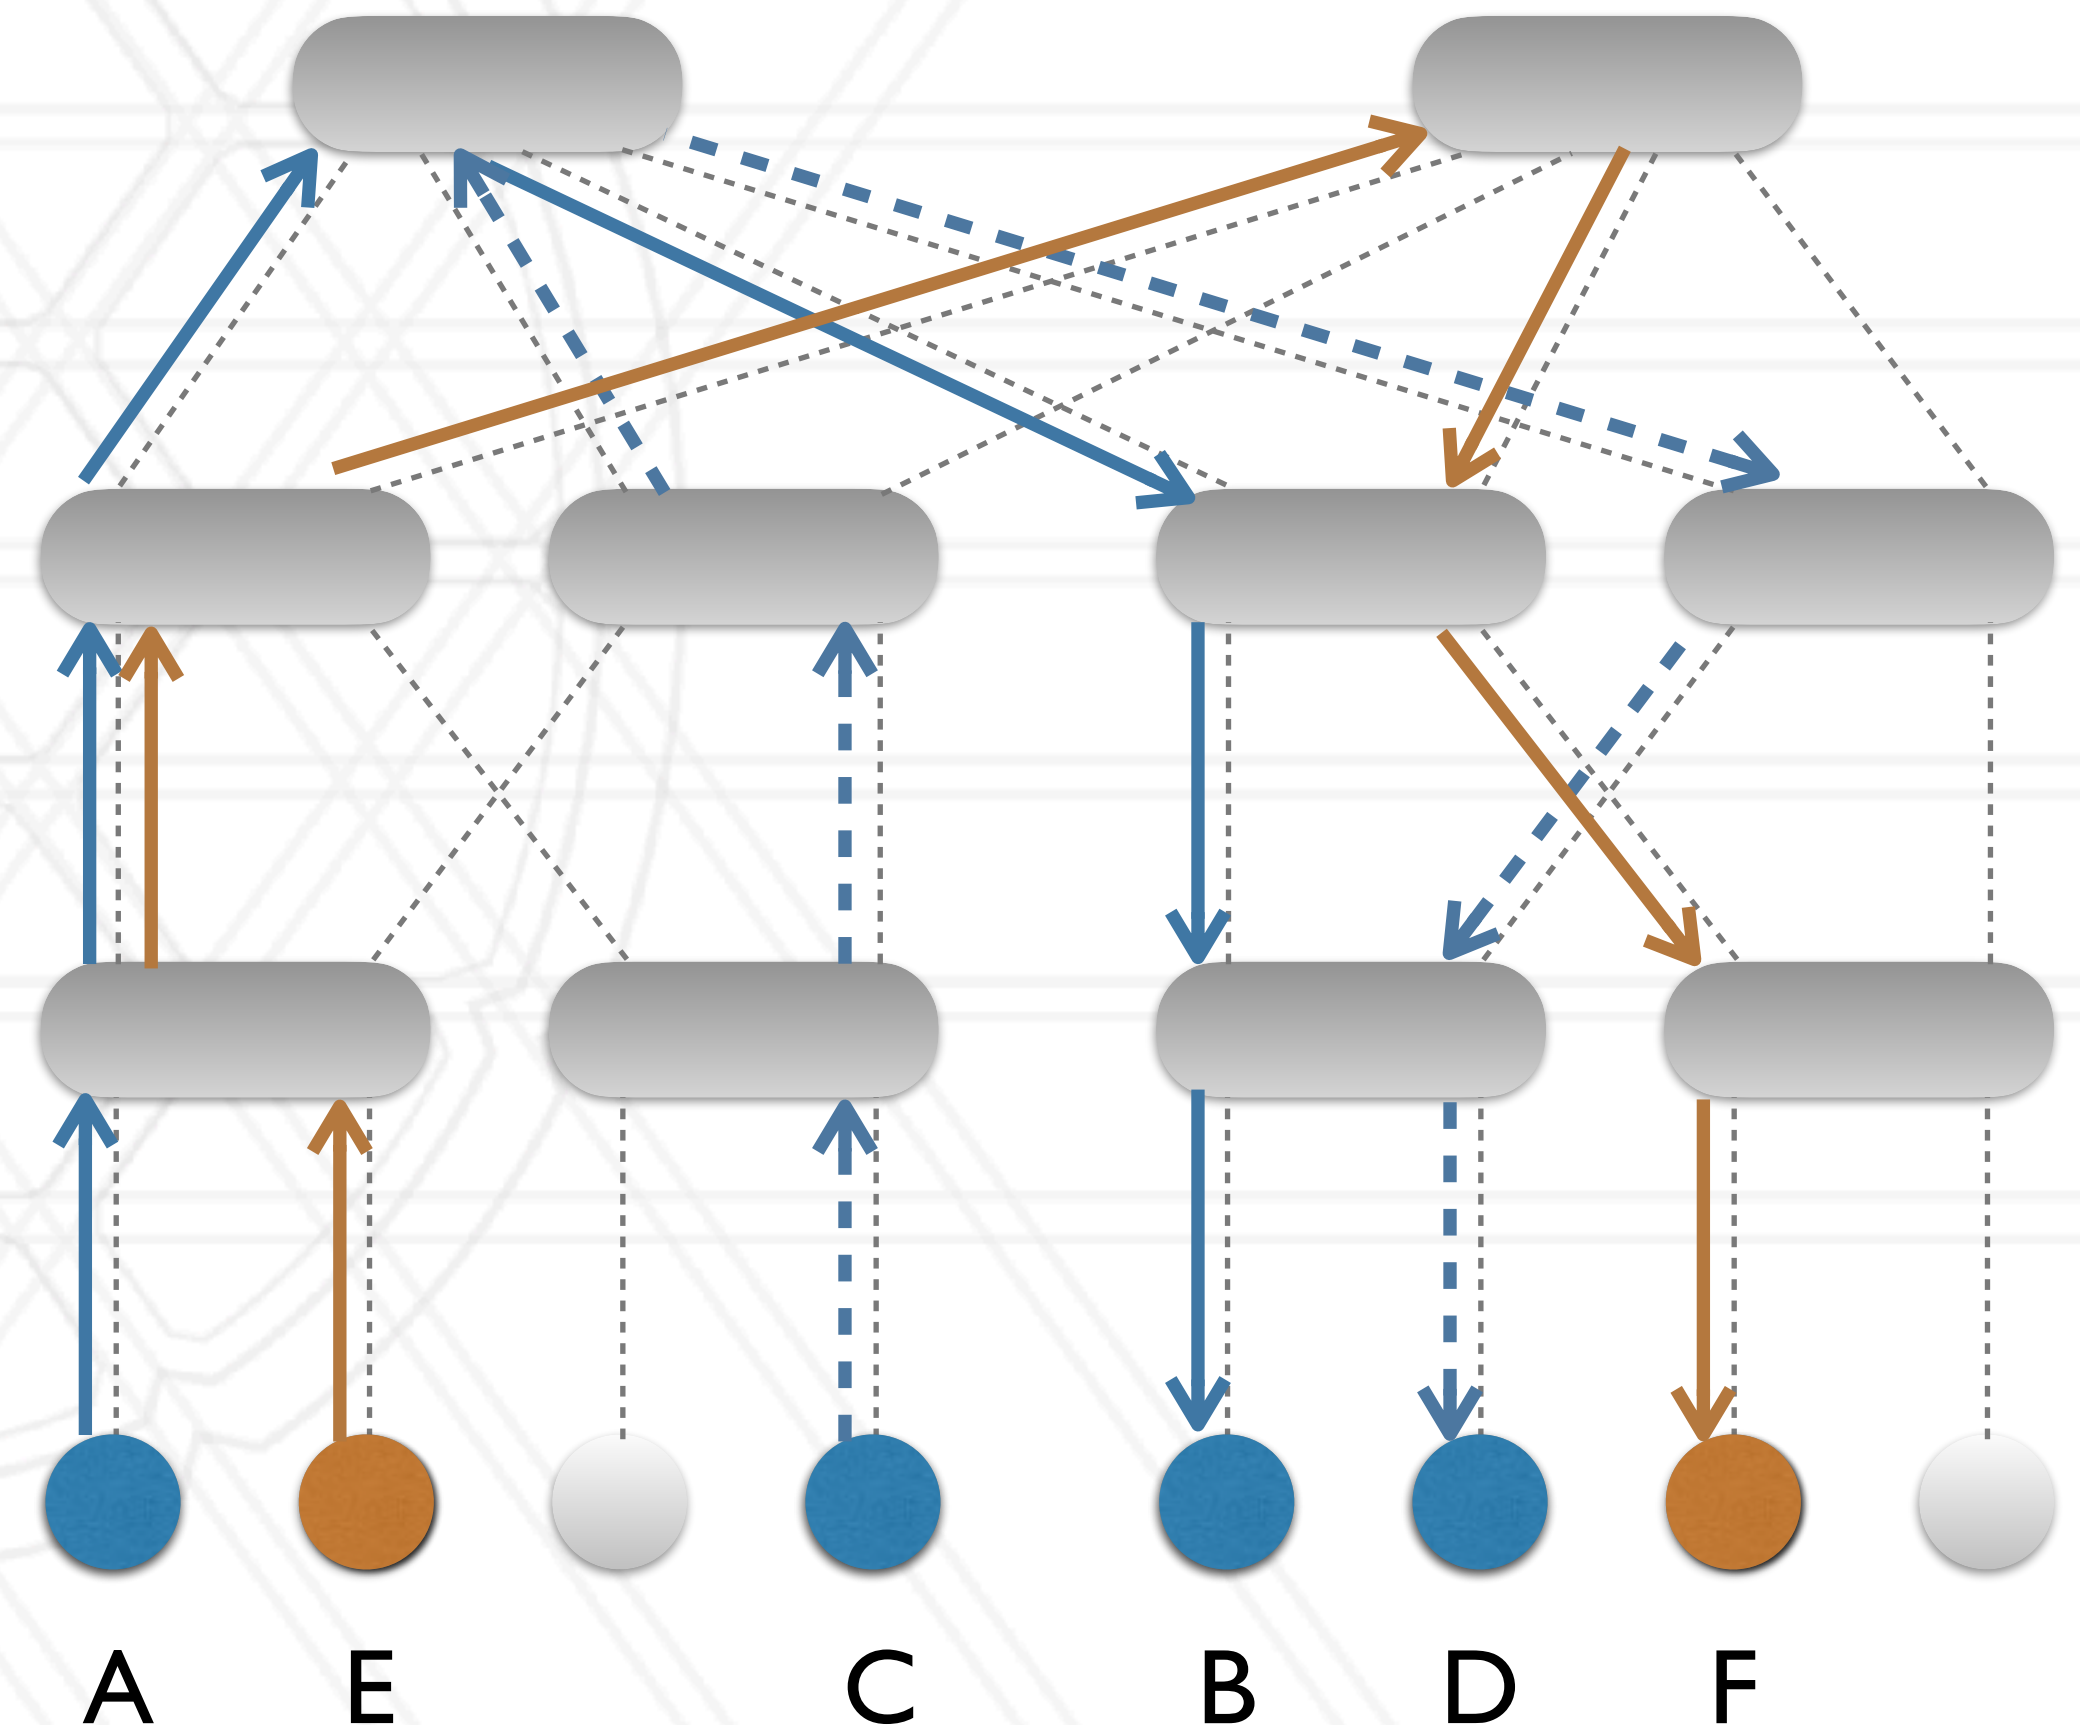


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

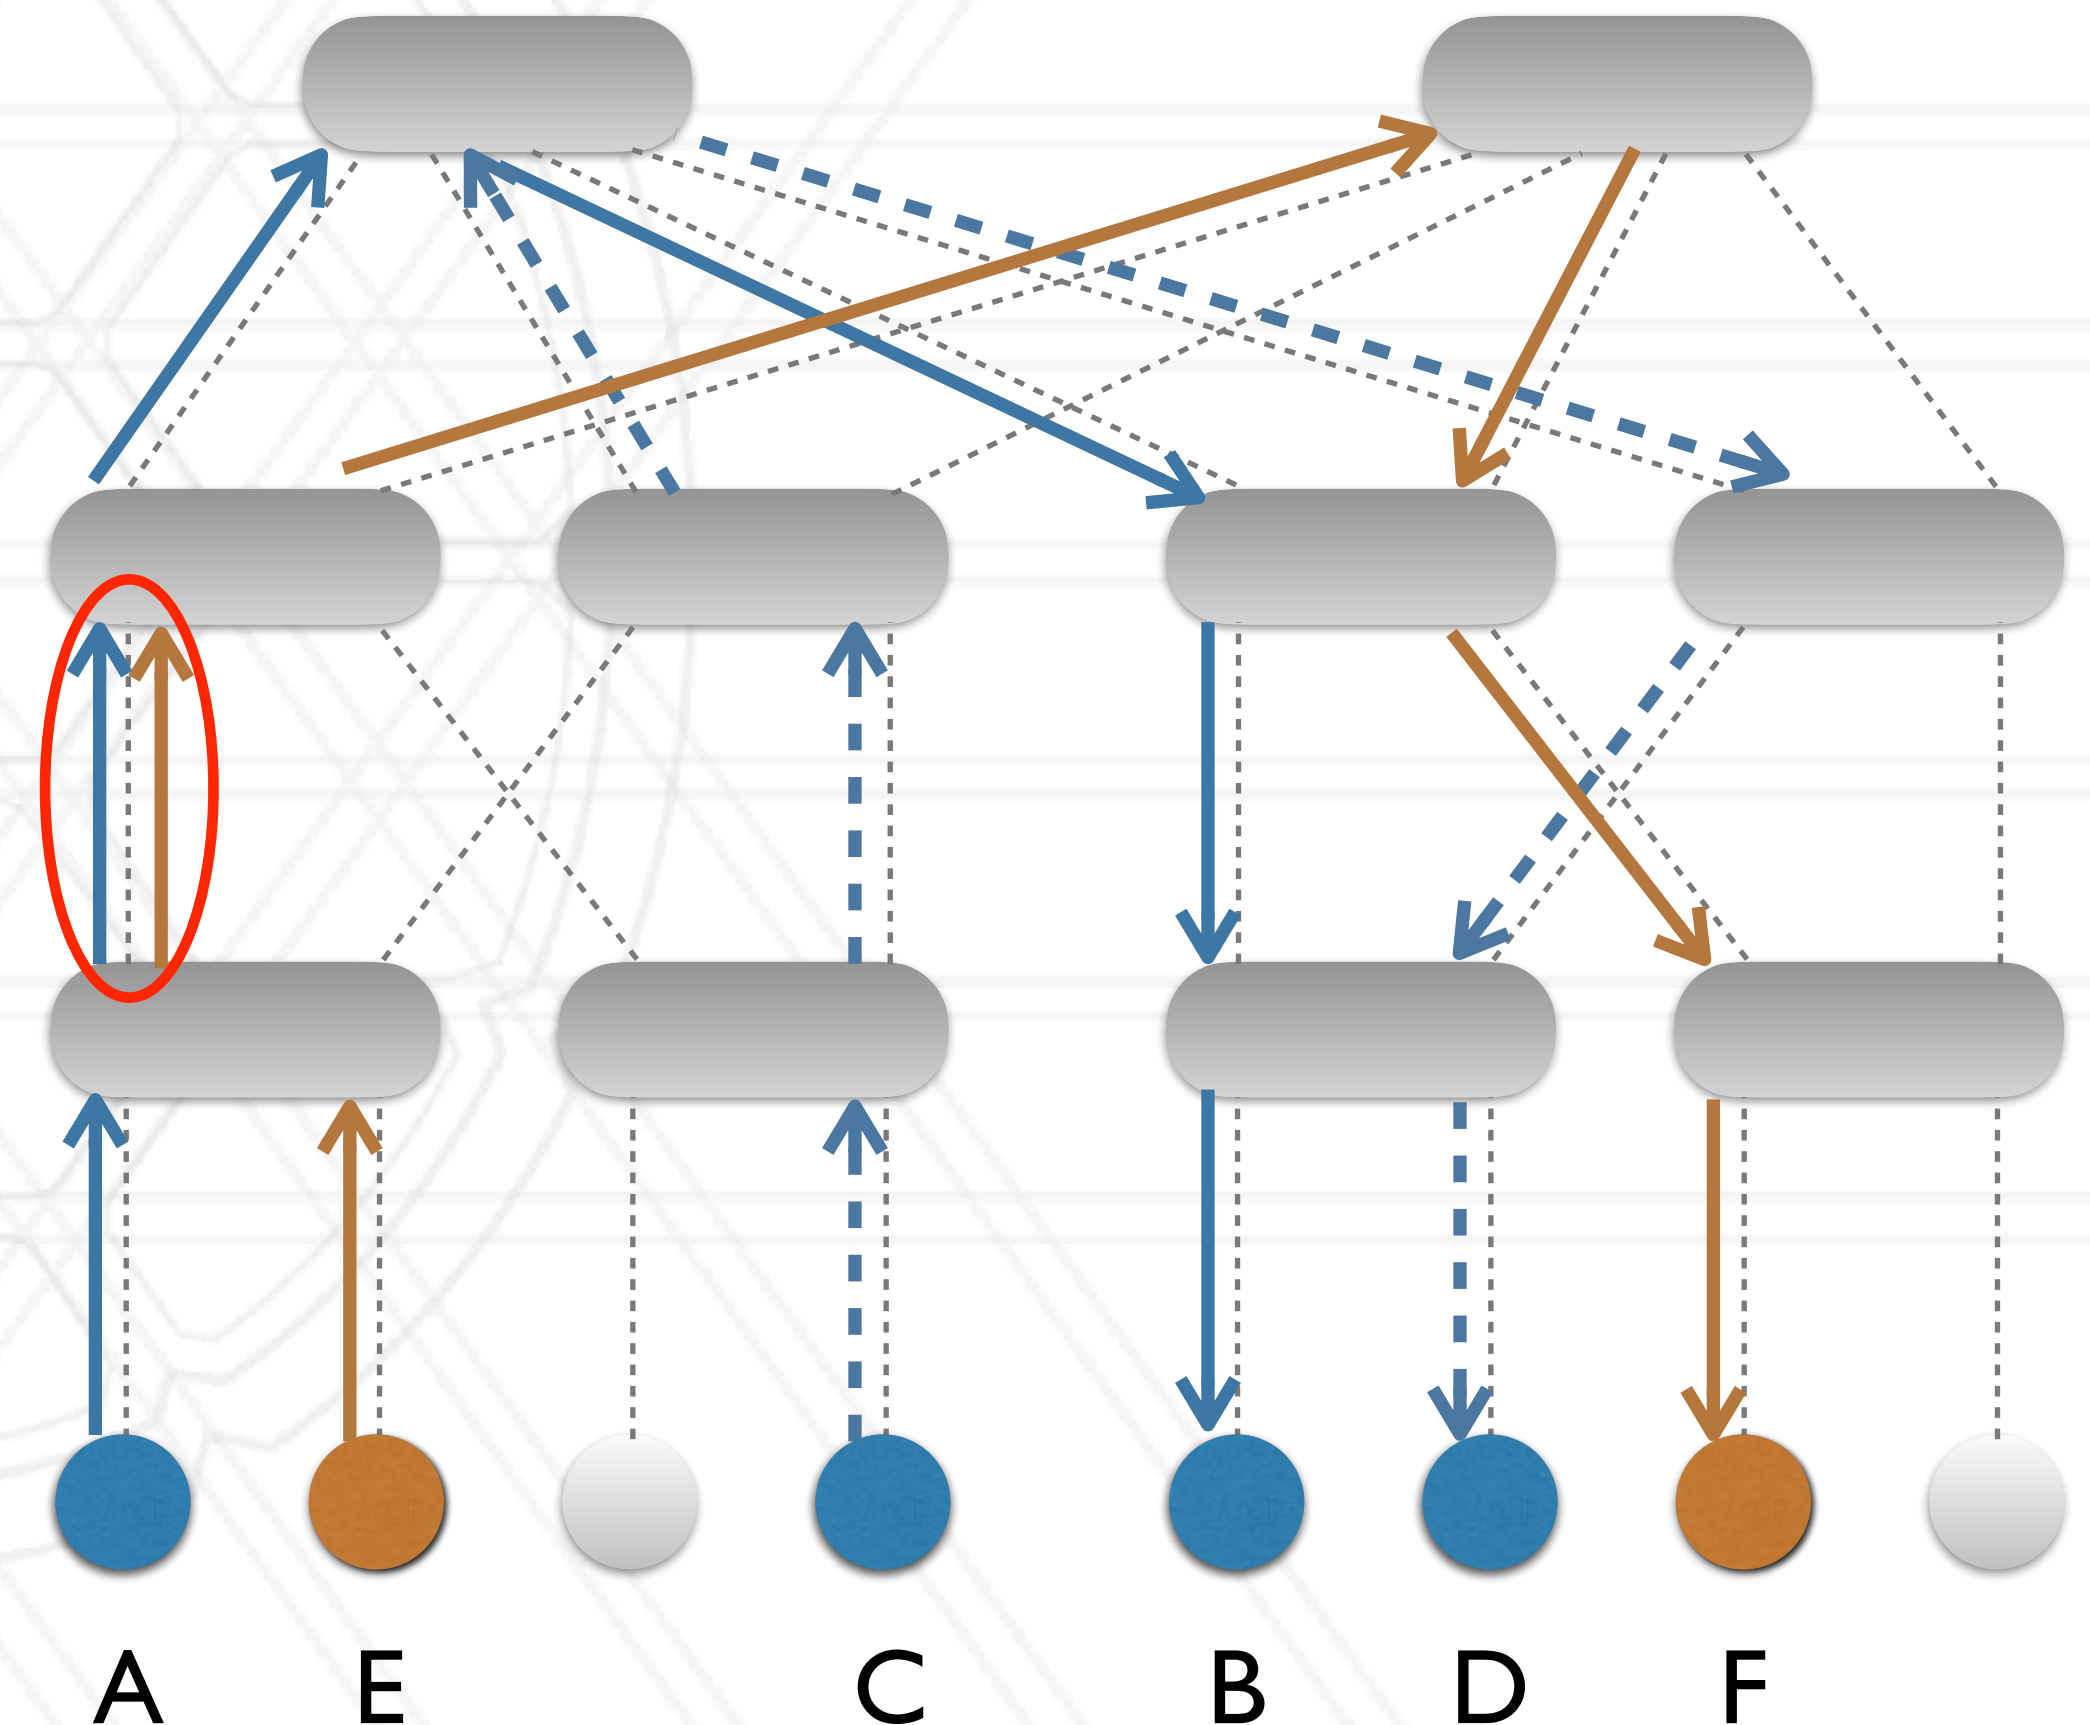


AFAR: adaptive flow aware routing

Solution: dynamically re-route traffic to alleviate hot-spots

Given: traffic for each pair of nodes in the system and the current routing

1. Calculate current load (network traffic) on all links in system
2. Find link with maximum load
3. If maximum $>$ threshold, re-route one flow crossing that link to an under-utilized link
4. Repeat from 1. using new routing

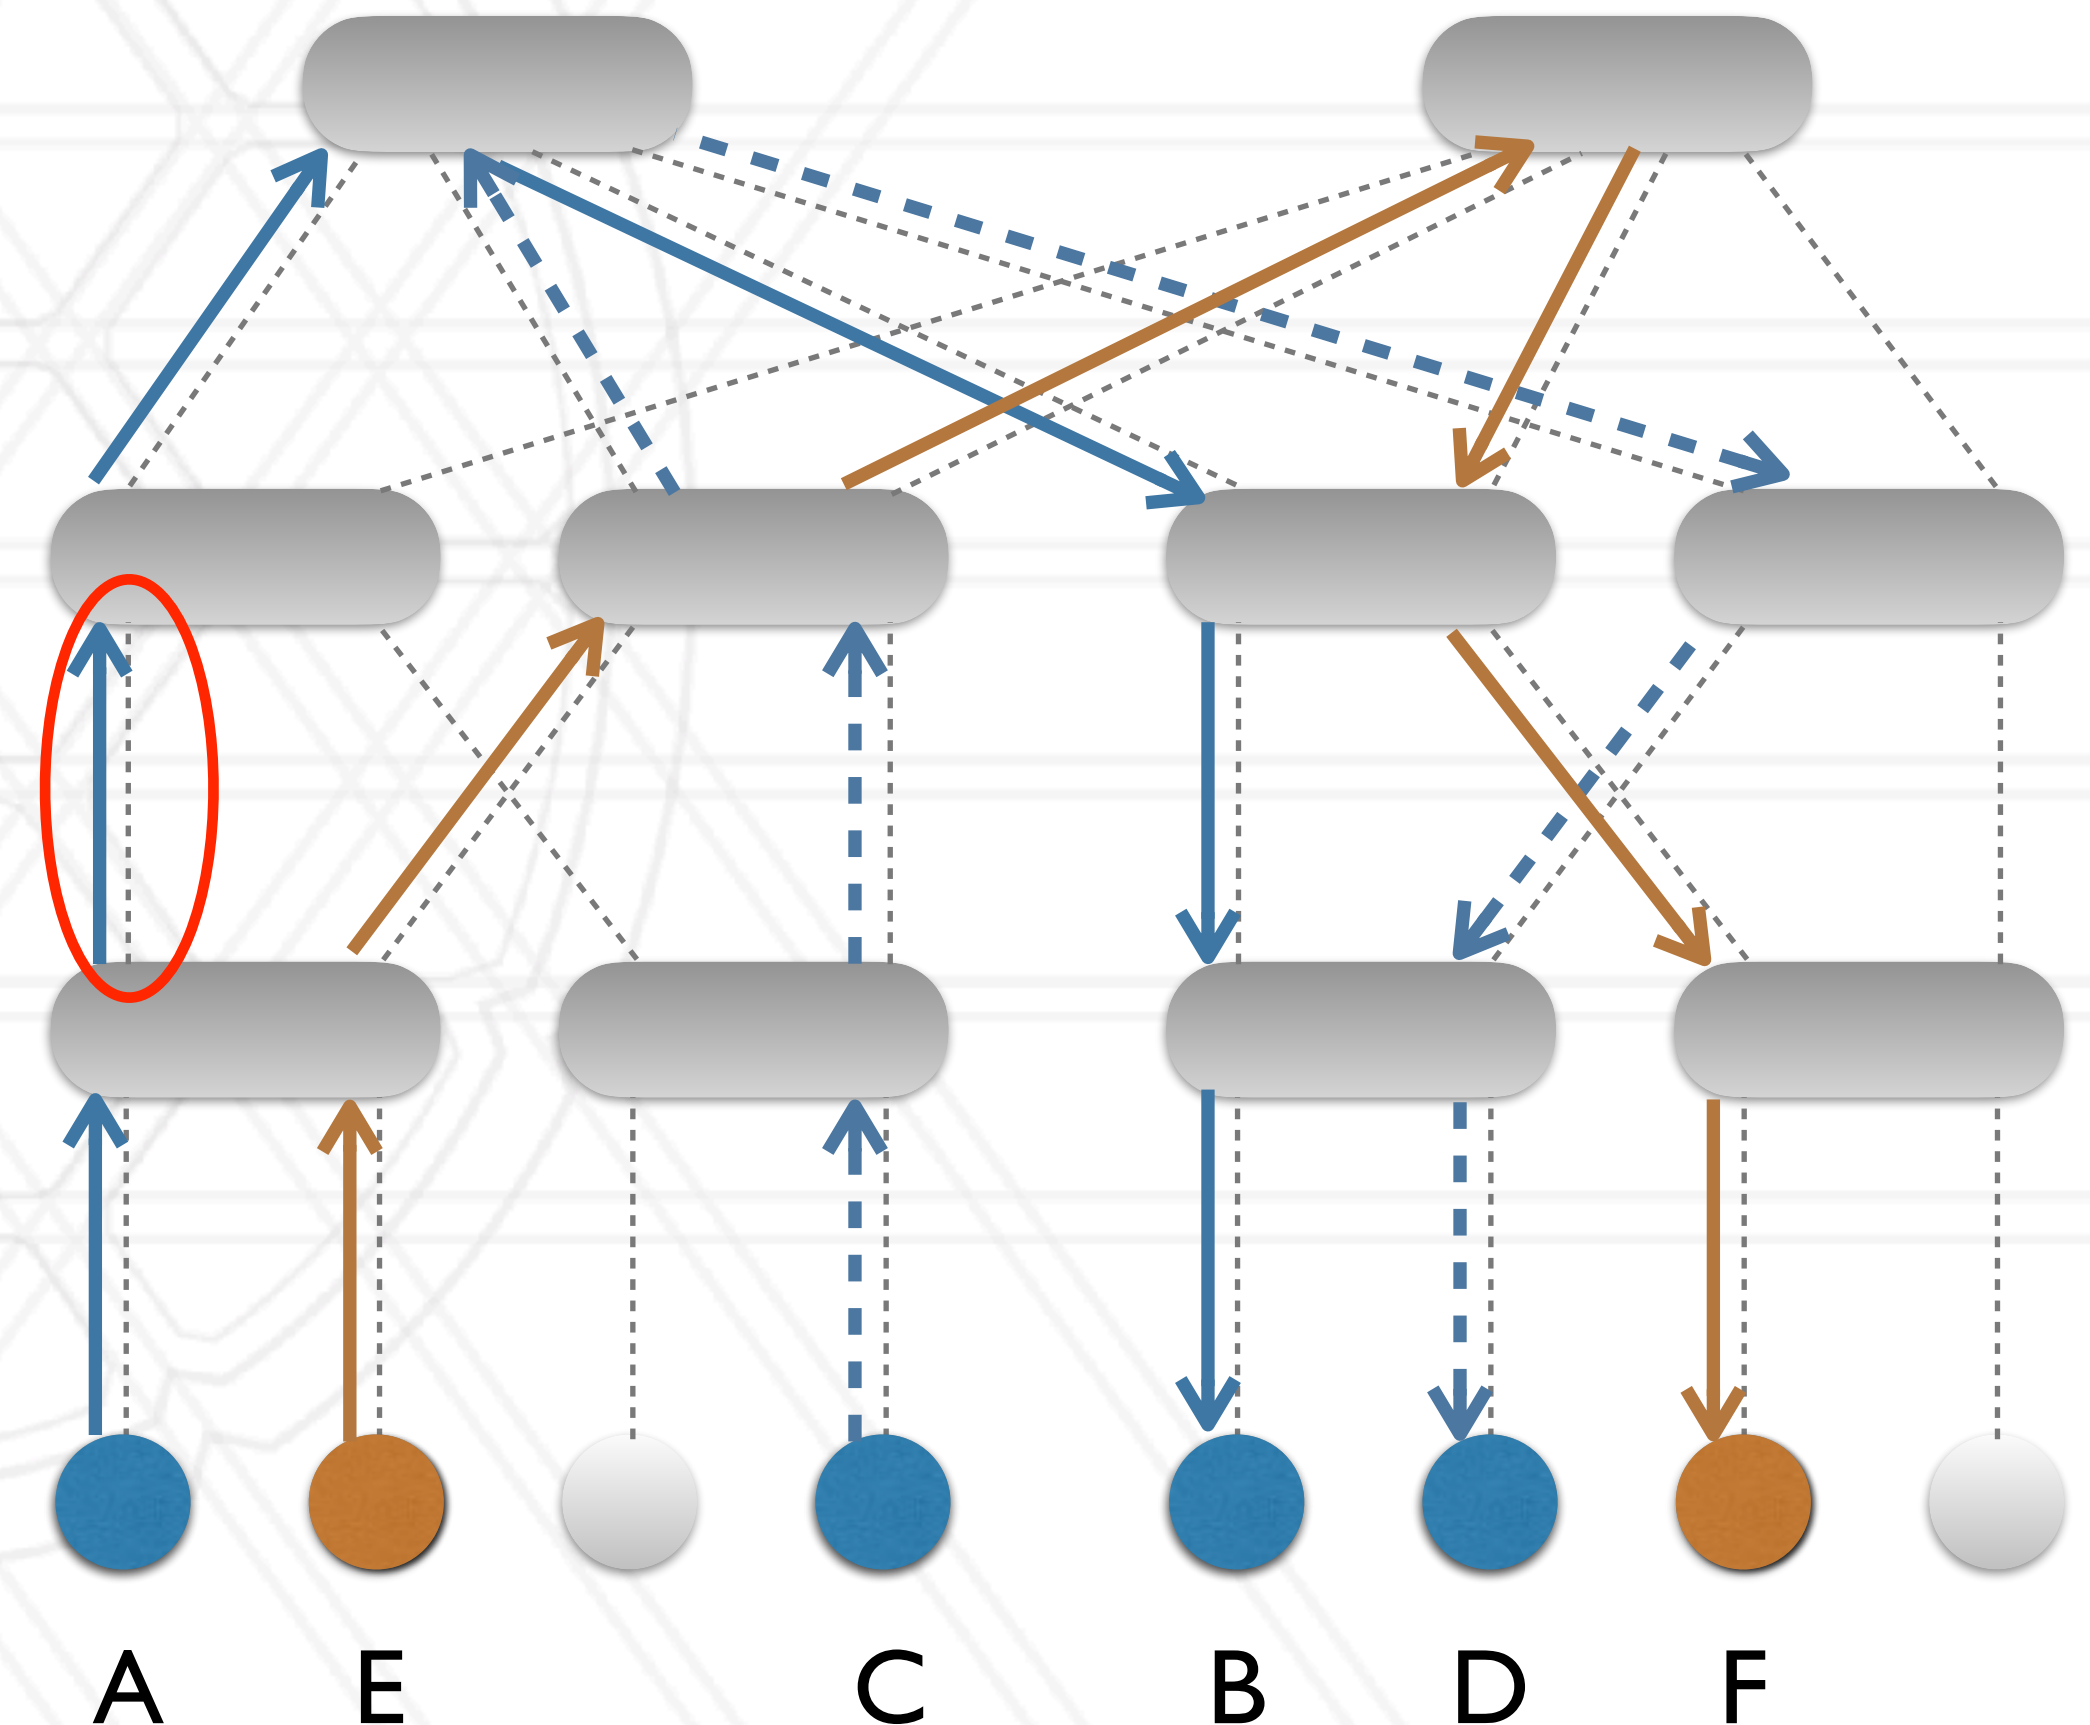


Topology-aware mapping

- Within a job allocation, map processes to nodes intelligently
- Inputs: application communication graph, machine topology
- Graph embedding problem (NP-hard)
- Many heuristics to come up with a solution
- Can be done within a load balancing strategy


Parallel filesystem

- Home directories and scratch space are typically on a parallel file system
- Mounted on all login and compute nodes
- Also referred to as I/O sub-system

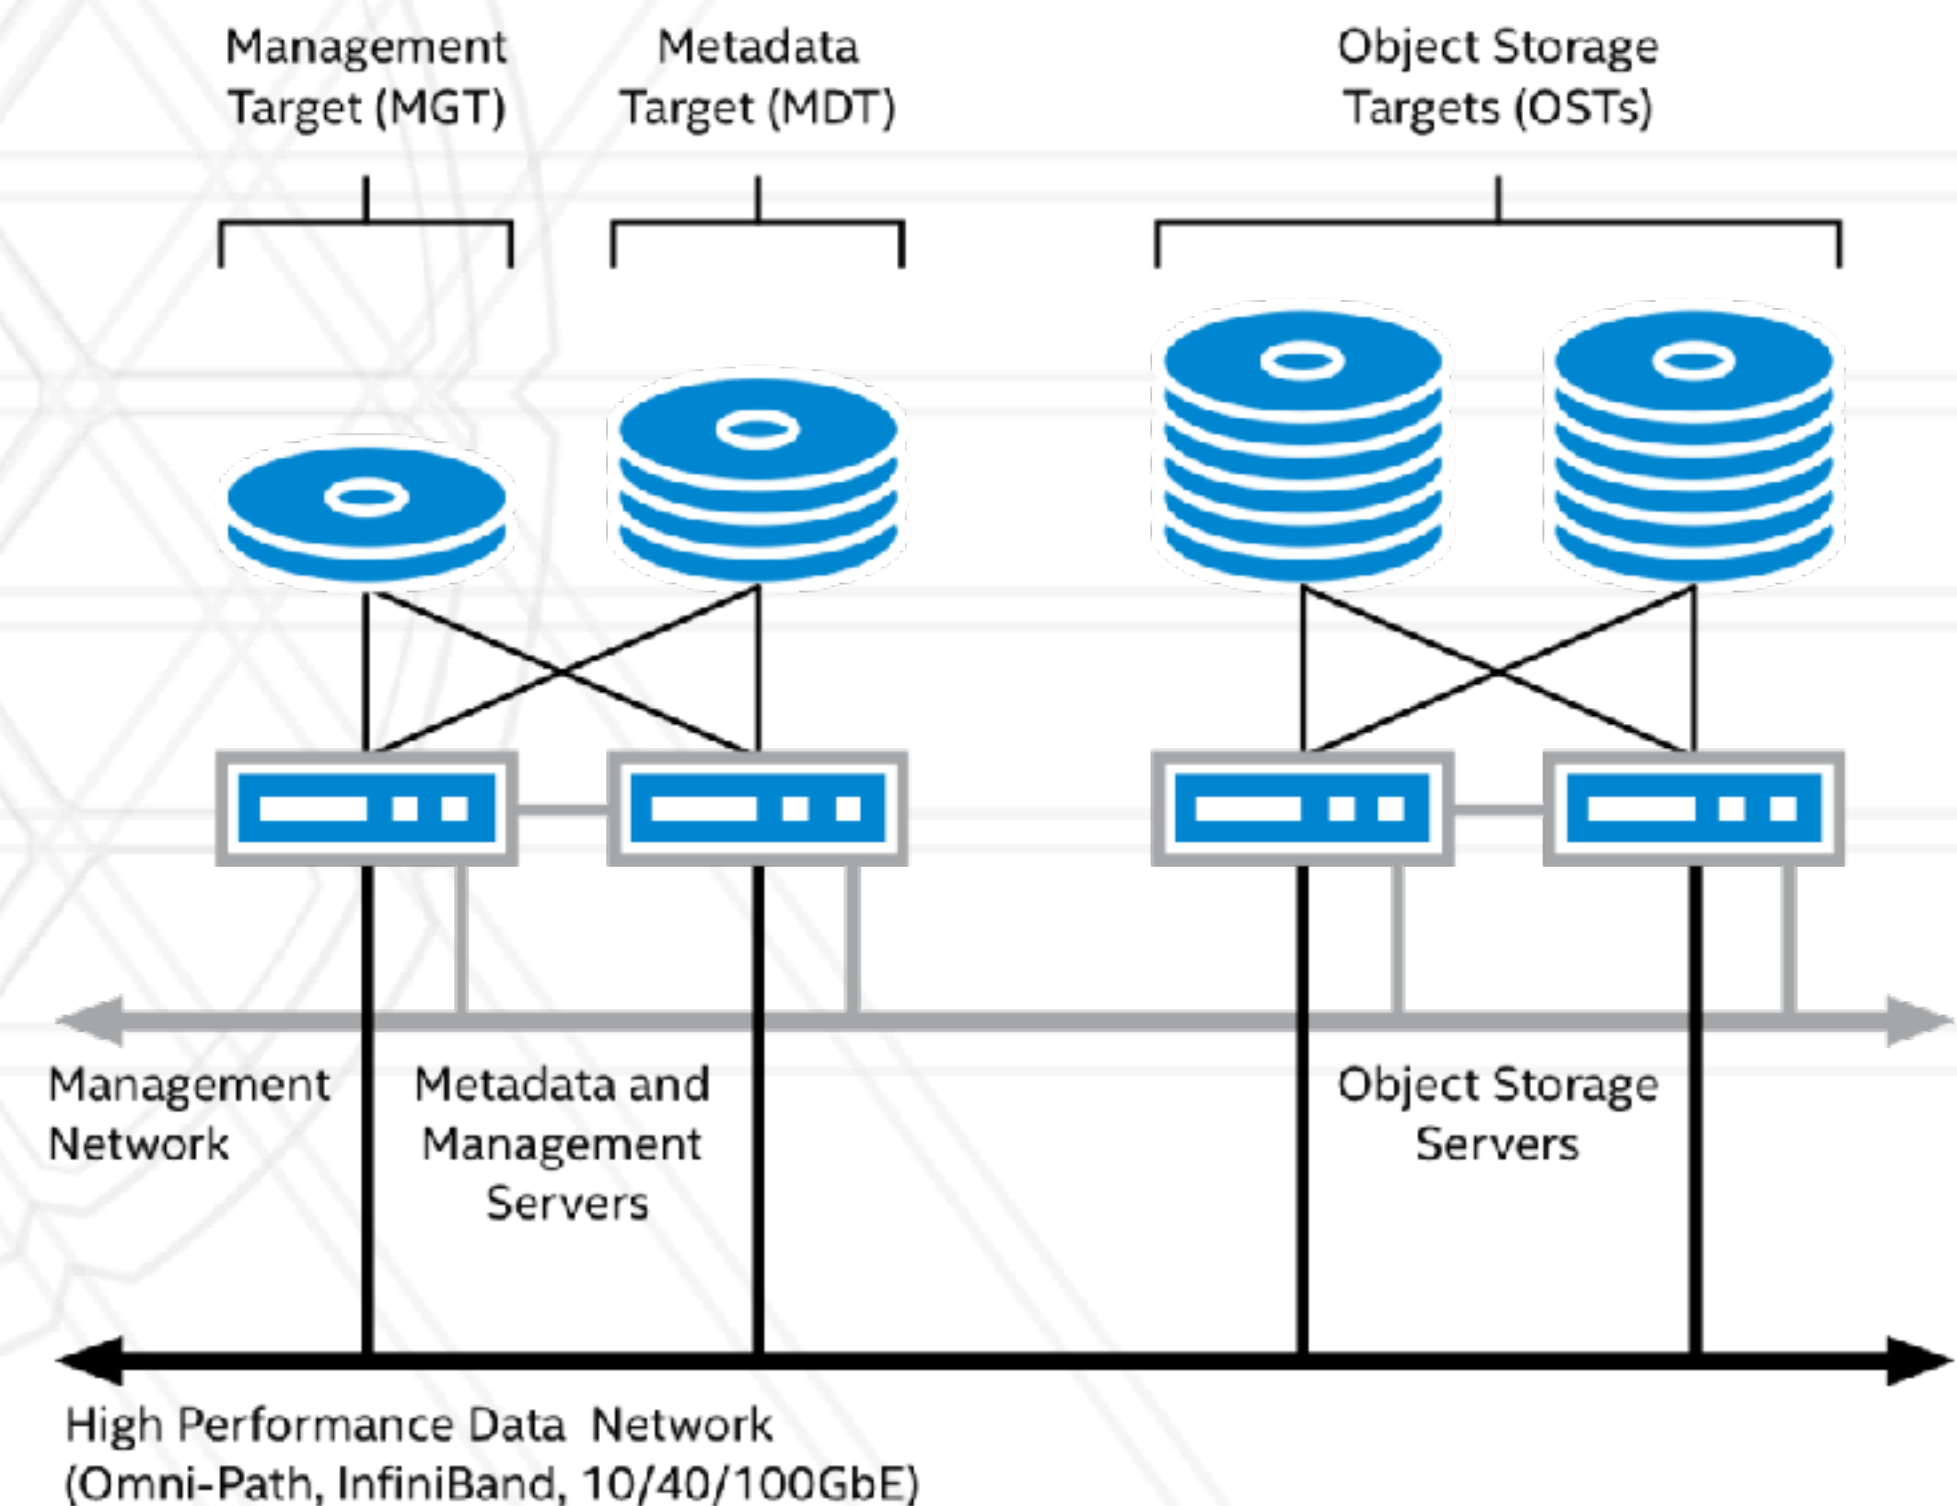


http://wiki.lustre.org/Introduction_to_Lustre

Links between cluster and filesystem

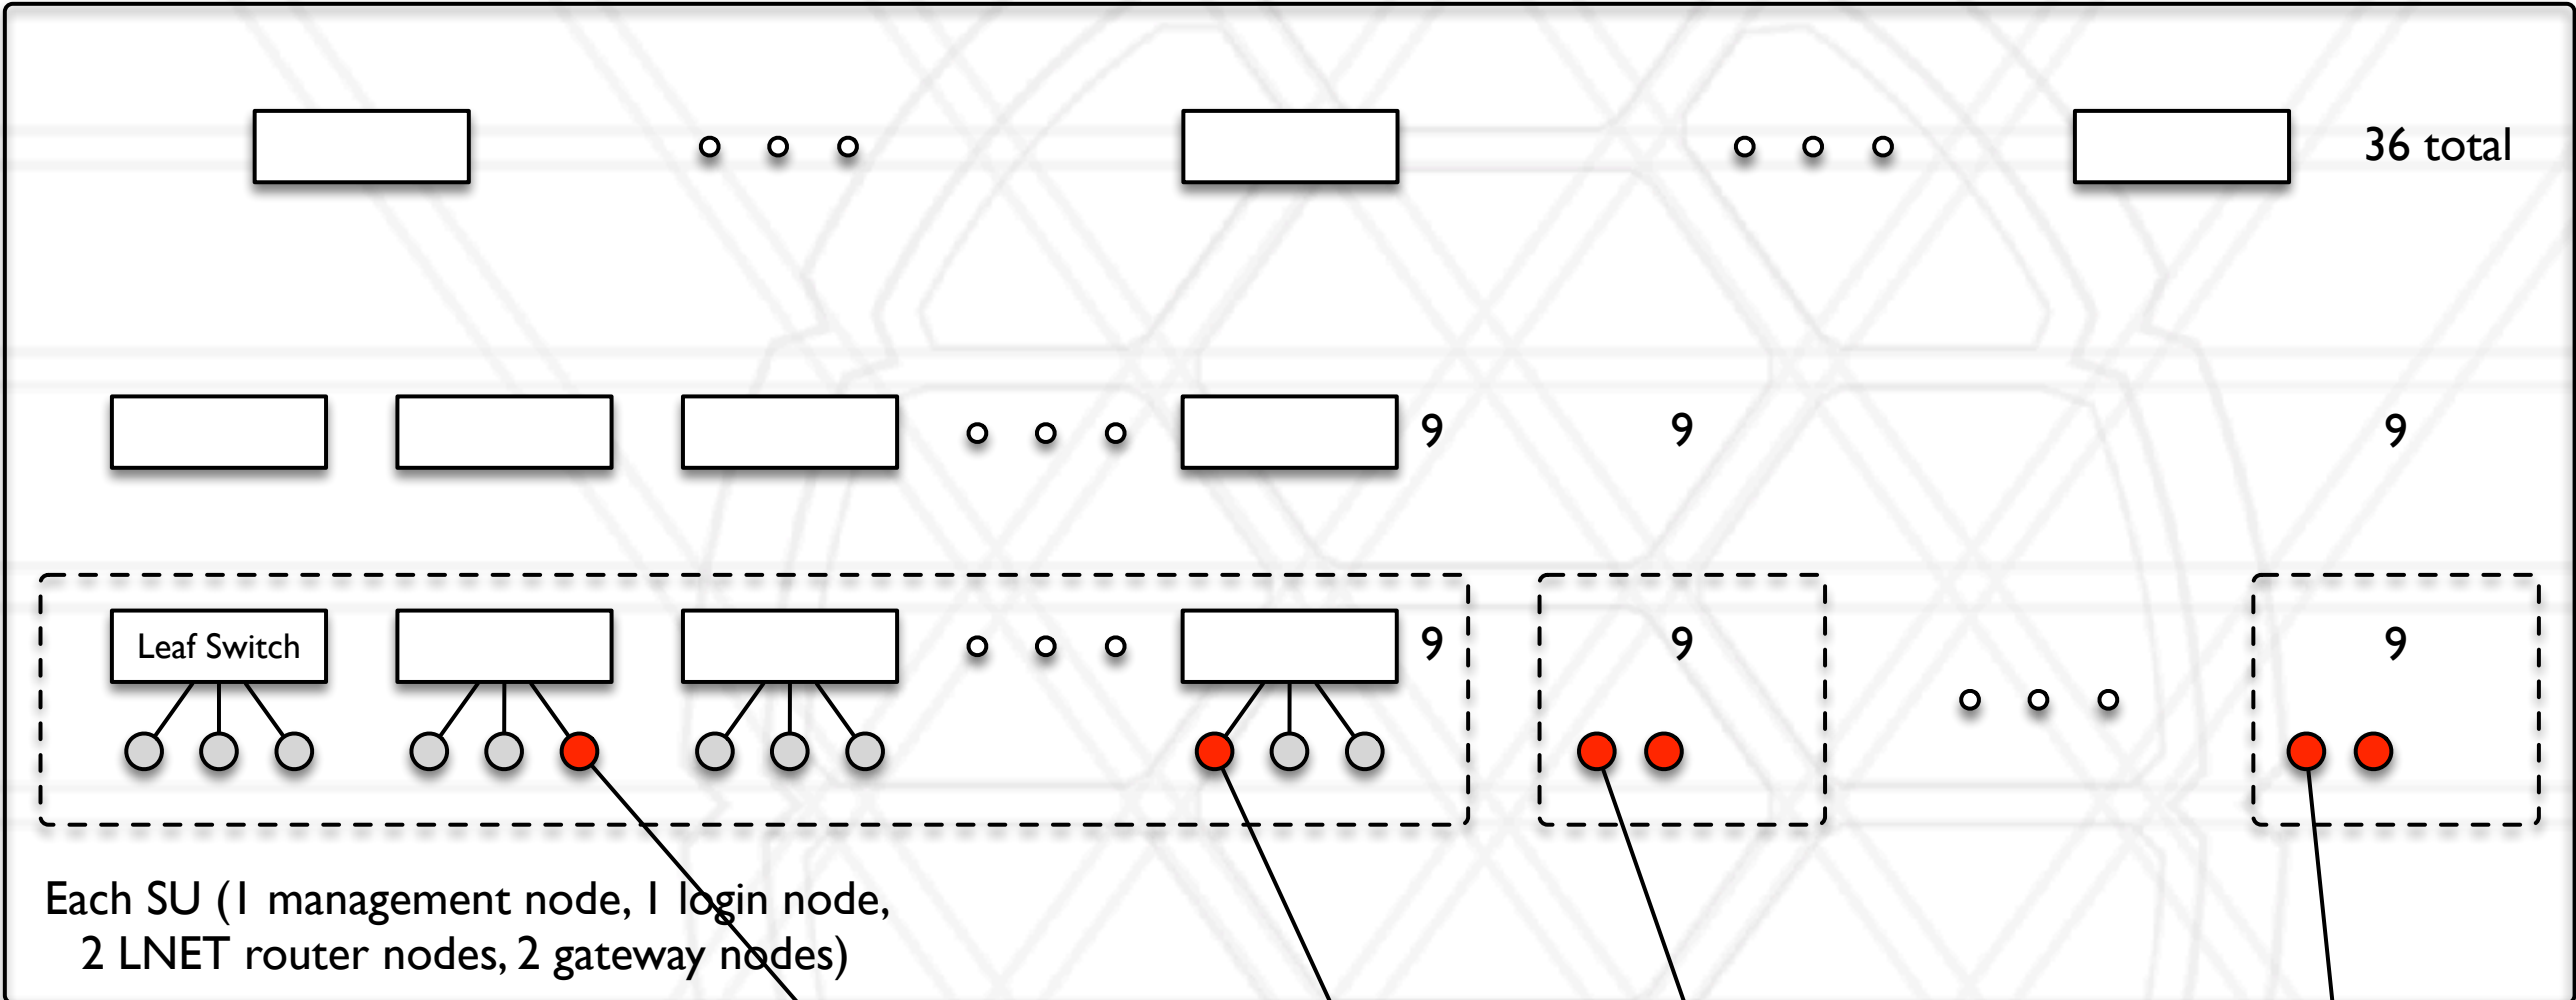

- Compute node
- LNET router node
- Object storage server (OSS)

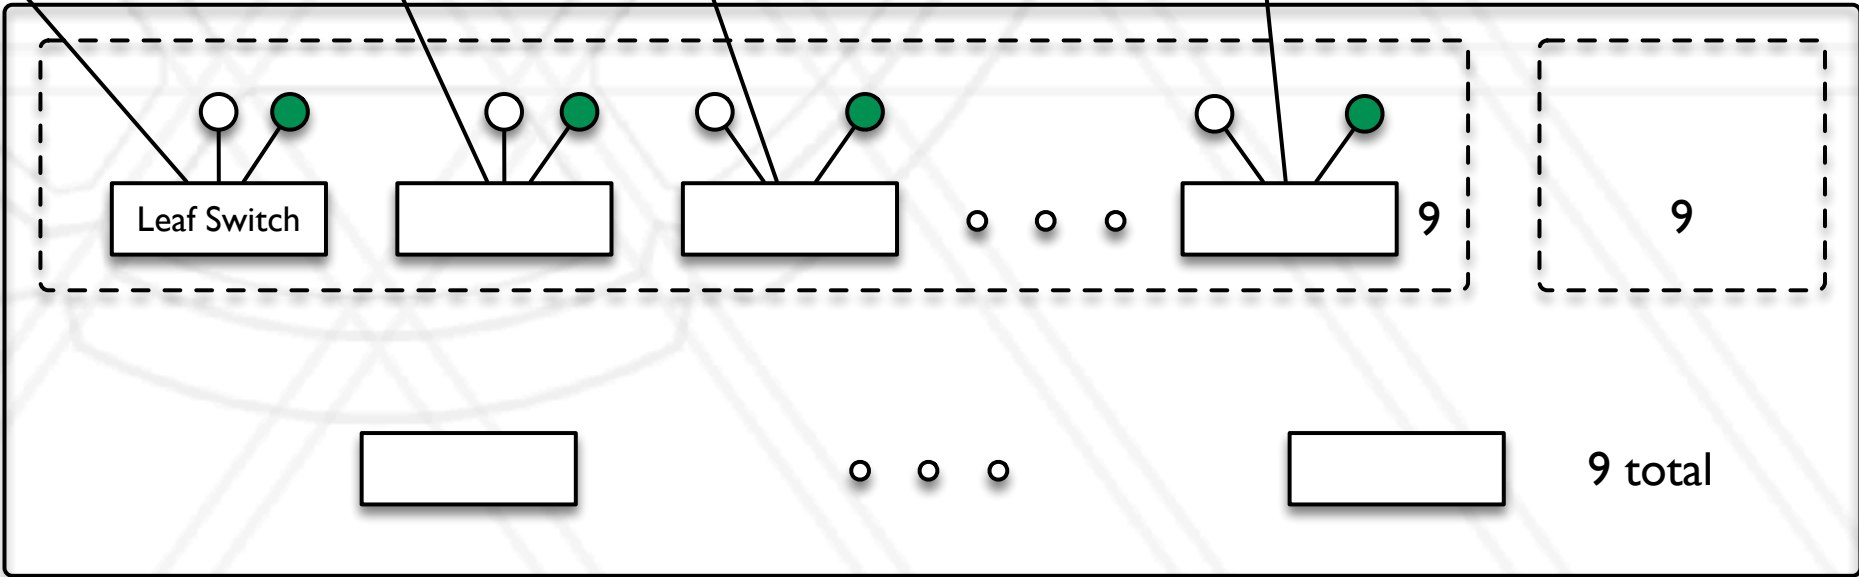

Different parallel filesystems

- Lustre: open-source (lustre.org)
- GPFS: General Parallel File System from IBM, now called Spectrum Scale
- PVFS: Parallel Virtual File System

Tape drive

- Store data on magnetic tapes
- Used for archiving data
- Use robotic arms to access the right tape: <https://www.youtube.com/watch?v=d-eWDuEo-3Q>

Burst buffer

- Fast, intermediate storage between compute nodes and the parallel filesystem
- Two designs:
 - Node-local burst buffer
 - Remote (shared) burst buffer

I/O libraries

- High-level libraries: HDF5, NetCDF
- Middleware: MPI-IO
- Low-level: POSIX IO

Different I/O patterns

- One process reading/writing all the data
- Multiple processes reading/writing data from/to shared file
- Multiple processes reading/writing data from/to different files
- Different performance depending upon number of readers/writers, file sizes, filesystem etc.

I/O profiling tools

- Darshan
 - Lightweight profiling tool from Argonne National Lab
- Recorder
 - Research prototype from UIUC



UNIVERSITY OF
MARYLAND

Abhinav Bhatele

5218 Brendan Iribe Center (IRB) / College Park, MD 20742

phone: 301.405.4507 / e-mail: bhatele@cs.umd.edu